

BALLUFF

BCS Capacitive Sensors

New approaches to object and level detection



Find the latest product information and application solutions at www.balluff.com



■ Newsletters

View previous issues and sign up for the Balluff monthly e-newsletter.



www.balluff.com/newsletter

■ Industry Center

Find products and solutions for your specific industry.



www.balluff.com/industry

■ Product Selector

Select and compare sensors to best fit your application.



www.balluff.com/selector

■ Applications

See real world examples of sensor applications.



www.balluff.com/solutions


■ Literature

Download literature PDFs and request your printed copy online.



www.balluff.com/literature

Introduction	2
Object Detection	13
Level Detection	31
Accessories	55
Fundamentals and Definitions	89
Index and Short Order Codes	103

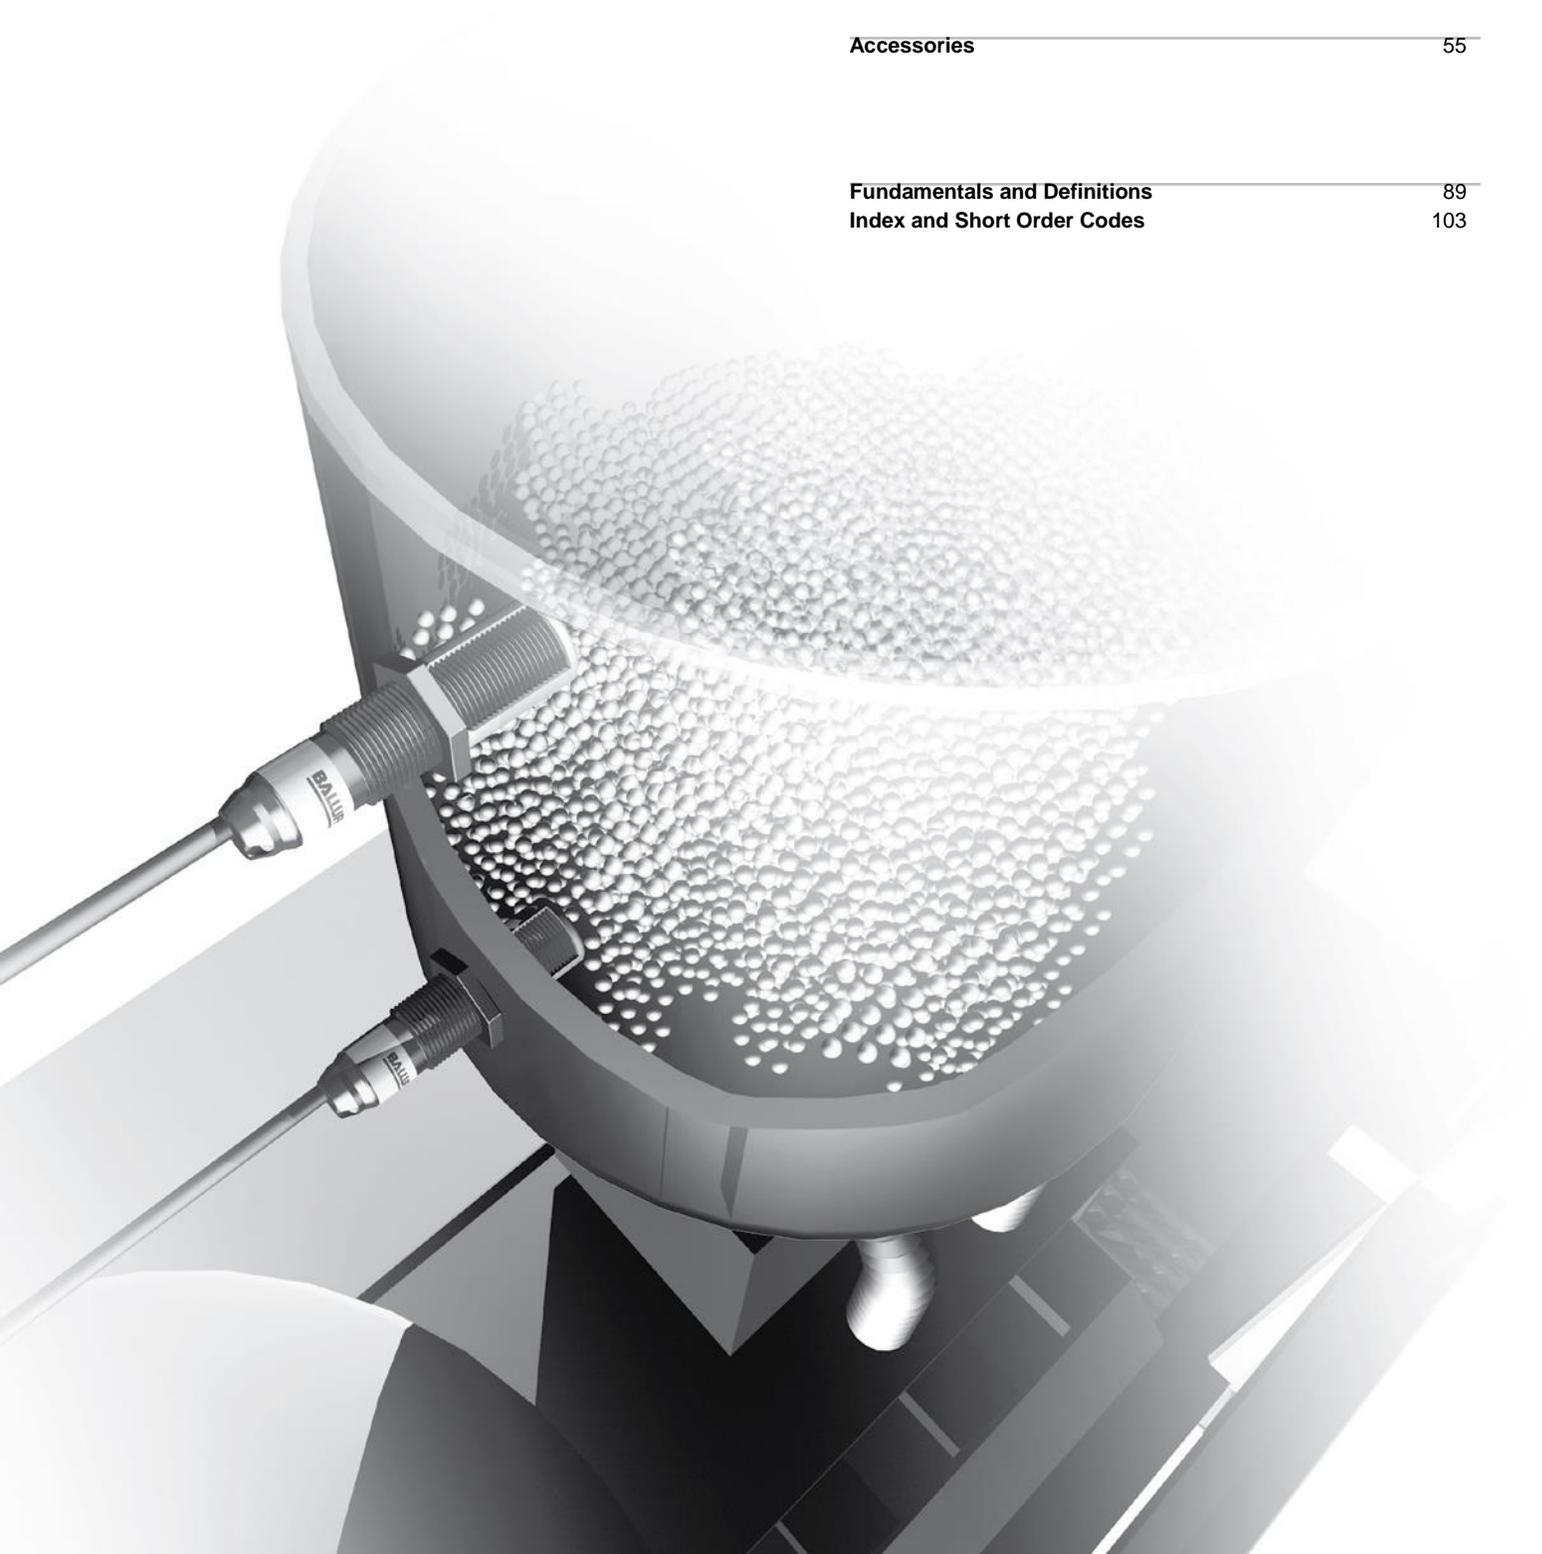

Capacitive Sensors

New approaches to object and level detection

Capacitive sensors have become an important part of industrial automation.



Balluff BCS capacitive sensors monitor and detect stack heights and levels, as well as presence of objects and content in glass, plastic or paper packages with extreme precision. They are unaffected by dust, surface reflections or object composition such as color or texture. Capacitive sensors also detect levels of solids or liquids with absolute reliability through glass and plastic walls, with less regard to external conditions.

Balluff BCS capacitive sensors get the job done when others fall short.



BCS capacitive sensors open up new ways to solve challenging applications.

The ideal level sensor, **SMARTLEVEL** sees through not only thick glass and plastic walls, it also compensates automatically for moisture, foam and extensive material build-up.

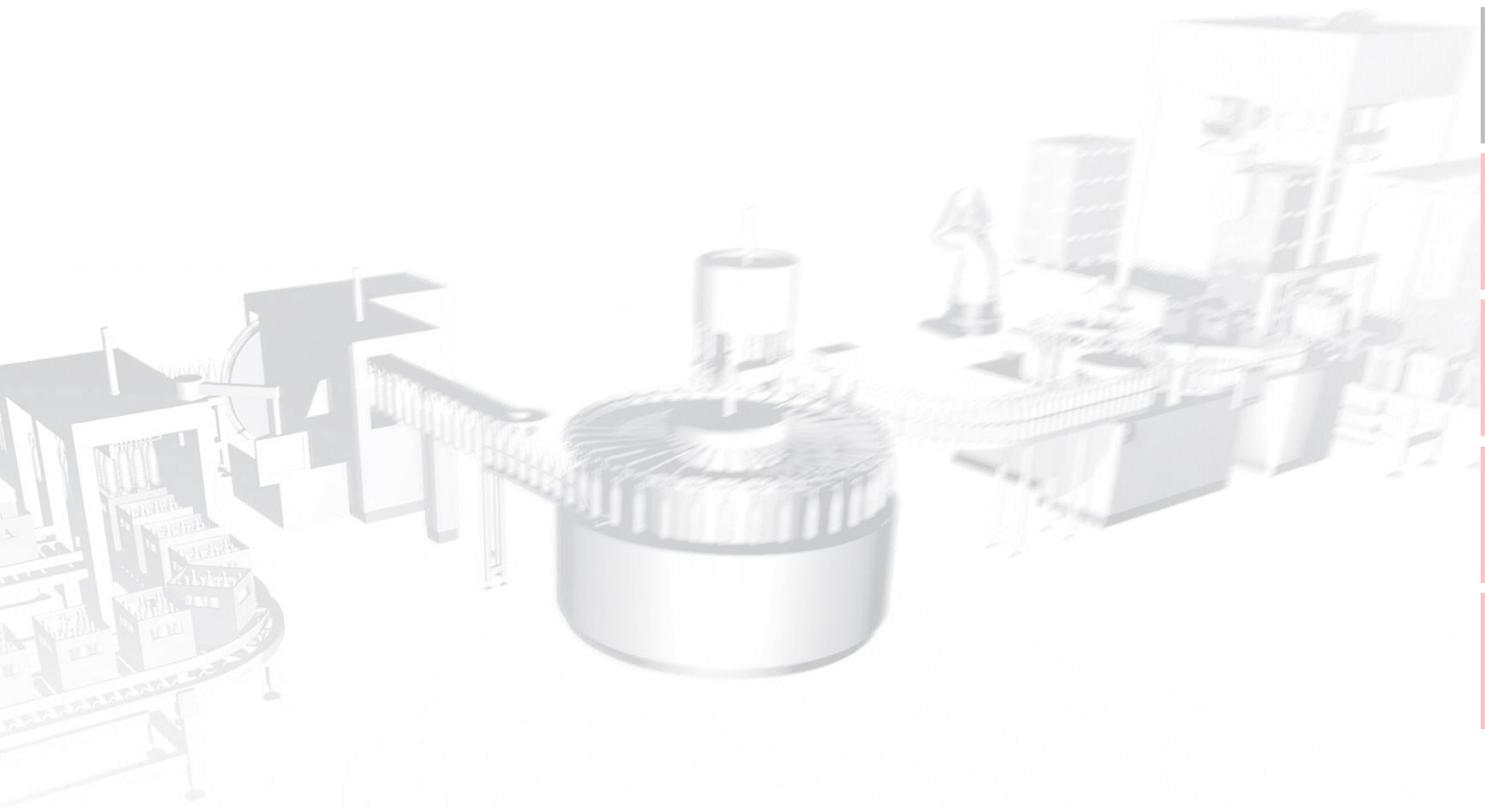

SMARTLEVEL takes off – in the Airbus A380

Airbus is equipping the lavatories in their 4-engine large-body A380 with a mixer tap. At the heart of this exclusive system in the elegant Airbus design is the compact SMARTLEVEL capacitive sensor from Balluff. These SMARTLevel sensors enable passengers to conveniently select the desired water temperature with the assistance of an LED indicator.

SMARTLEVEL technology avoids false triggering caused by clinging dirt, soap foam or liquid film on the sensing surface. Only hand-touching the faucet results in a switching operating, even if a soaked paper towel covers it entirely. This extraordinarily reliable switching precision is made possible by the new, patented oscillator SMARTLevel technology which automatically compensates for any possible interference factors.

Capacitive Sensors

New approaches to object and level detection

Balluff BCS capacitive sensors are not only superior in object and level detection applications, but they are also highly specialized for a wide range of challenging applications.

The BCS family of capacitive sensors consists of high temperature and pressure ratings, stainless steel and PTFE housings for harsh environments, a wide supply voltage range and especially compact form factors. The BCS adhesive sensor adapts to curved housing and surface shapes due to its unique flexible design.

SMARTLEVEL sensors go the extra mile for liquid level applications. This sensor series detects conductive or water-based media through thick glass and plastic walls while compensating for moisture, foam and material build-up. SmartLevel sensors do not require any initial setup procedure while guaranteeing application security in a wide range of production processes. Read more about SmartLevel on page 42.




Stainless steel sensors

- Offers high tightening torques
- Higher sensing ranges on non-conductive materials
- Proven in demanding environments such as foods, plastics, specialty machines as well as the lumber and furniture industry



Complete PTFE sensors

- Outstanding chemical resistance
- For level detection of aggressive and caustic media such as acids, bases, and solvents
- Proven in the semiconductor and food industries, as well as the medical and industrial manufacturing industries



Adhesive sensors

- Quick, cost-effective mounting, (e.g. on container walls or pipes)
- Flexible housing adapts to almost any curved and uneven surface




High temperature rated sensors



- For ambient temperatures up to 480 °F (250 °C)
- Suitable for level sensing (e.g. granulates, epoxy resins, and for object detection of materials in elevated temperature environments such as glass tempering)

Capacitive Sensors

New approaches to object and level detection

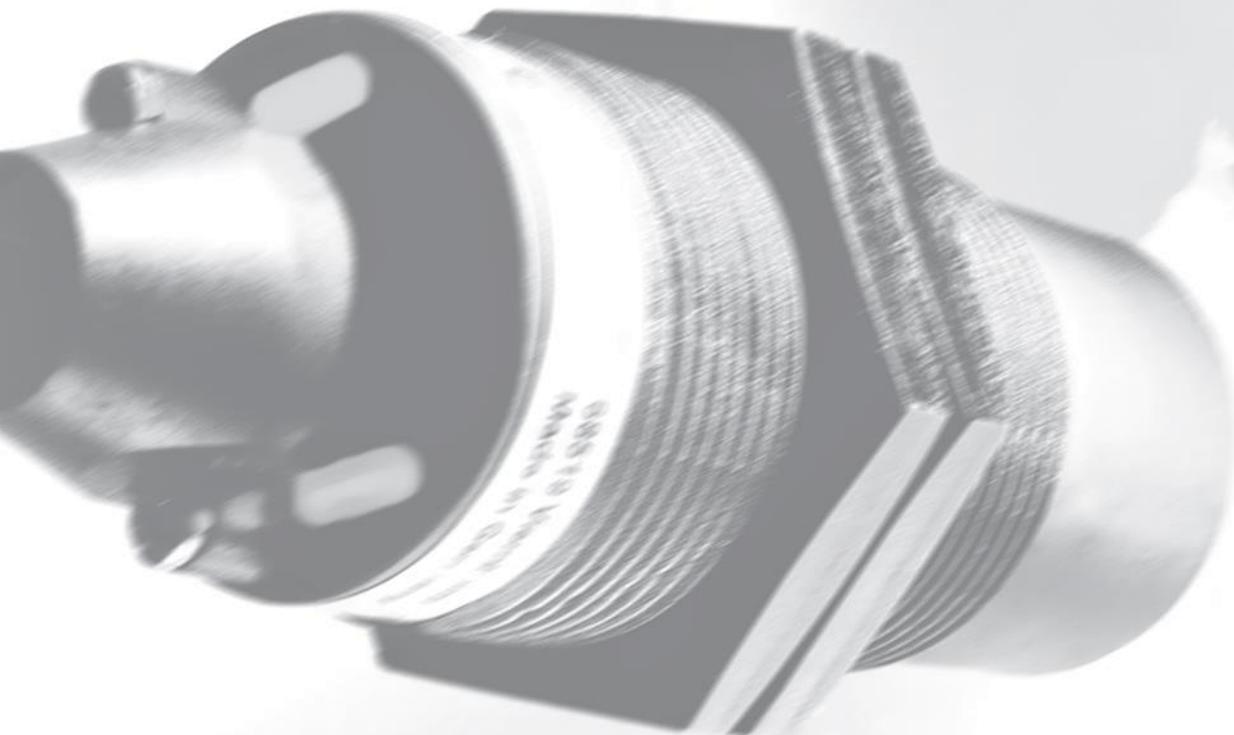

i



SMARTLEVEL sensors

- Compensate automatically for moisture, foam and material build-up
- Penetrate glass and plastic walls up to 12mm thick
- Detect water-based and highly conductive media
- Reduce costs through adjustment-free installation in most applications
- Eliminate maintenance cleaning procedures
- Available with chemically resistant complete PTFE housing



AC/DC sensors

- Wide operating voltage range of 20...250 V AC or DC
- For robust relay controls



Mini sensors

- Remote amplifier for easy adjustment in confined spaces
- Small housing dimensions offer a higher design freedom
- Ideal for small parts detection
- Tubular and disc form factors with equal performance to self contained version
- Shielded and unshielded form factors all in a robust stainless steel housing
- IP 67 rated

Application-specific form factors

- For leakage detection
- Immunity to ESD
- Pressure rated up to 150 bars
- External function diagnostics
- IP68/ 69K rating

Capacitive Sensors

Product overview



Ø 4 mm flush M5x0.5 flush Ø 6.5 mm flush Ø 6.5 mm non-flush M8x1 flush M8x1 non-flush

	Ø 4 mm flush	M5x0.5 flush	Ø 6.5 mm flush	Ø 6.5 mm non-flush	M8x1 flush	M8x1 non-flush	
Supply voltage							
DC	■	■	■	■	■	■	
AC/DC							
Housing materials							
Stainless Steel 304 (V2A)	■	■	■	■	■	■	
Plastic							
PTFE (Teflon)							
Wiring							
Connector			■	■	■	■	
Cable with connector	■	■	■	■	■	■	
Cable			■	■	■	■	
Special features							
High temperature rated							
Function diagnostics							
SMARTLEVEL							
Compensate for moisture, foam and build-up							
Penetrate glass or plastic walls over 10 mm thick							
Detection of aqueous to highly conductive media							
Virtually no adjustment or cleaning required							
Main areas of application							
Object detection	p. 14	p. 14	p. 14...15	p. 15	p. 16...17	p. 16...17	
Direct sensing of bulk product and powdery media							
Indirect sensing of bulk product and powdery media through a container wall up to approx. 4mm							
Direct sensing of non-conductive liquid and paste-like media							
Indirect sensing of non-conductive liquids and paste-like media through a container wall up to approx. 4 mm							
Direct sensing of conductive liquids (SMARTLEVEL technology)							

Capacitive Sensors

Product overview



	Ø 30 mm flush	M30x1.5 flush	M30x1.5 non-flush	Ø 34 mm flush	Ø 34 mm non-flush	Disc shapes Ø 18...30 mm
Supply voltage						
DC	■	■	■	■		■
AC/DC			■		■	
Housing materials						
Stainless Steel 304 (V2A)	■	■	■			■
Plastic		■	■	■	■	
PTFE (Teflon)			■			
Wiring						
Connector		■	■	■		
Cable with connector						■
Cable	■	■	■	■	■	■
Terminal housing						
Special features						
High temperature rated			p. 51			
Pressure rated						
Stick-on, flexible						
Degree of protection IP 68						
Function diagnostics						
SMARTLEVEL						
Compensate for moisture, foam and build-up			p. 44			
Penetrate glass or plastic walls over 10 mm thick			p. 44			
Detection of aqueous to highly conductive media			p. 44			
Virtually no adjustment or cleaning required			p. 44			
Main areas of application						
Object detection	p. 21	p. 21...22		p. 22		p. 23...25
Direct sensing of bulk product and powdery media		p. 21...22 (lower ϵ_r)	p. 36...37	p. 22 (lower ϵ_r)	p. 37	
Indirect sensing of bulk product and powdery media through a container wall up to approx. 4mm	p. 21	p. 21...22		p. 22		p. 23...25 (Ø 22...30 mm)
Direct sensing of non-conductive liquid and paste-like media			p. 36...37		p. 37	
Indirect sensing of non-conductive liquids and paste-like media through a container wall up to approx. 4 mm	p. 21	p. 21...22		p. 22		p. 23...25 (Ø 22...30 mm)
Direct sensing of conductive liquids (SMARTLEVEL technology)			p. 44			
Indirect sensing of conductive liquids through a container wall even over 10 mm thick (SMARTLEVEL technology)			p. 44			
Leak monitoring						

Capacitive Sensors

Product overview



Disc shapes
Ø 50 mm

Micro-Box
16x34x8 mm

36x44x10 mm

90x16x4 mm

Ø 7x52 mm

Micro-Level
M12x1,
G 1/4",
NPT 1/4"

M18x1,
R 3/8",
NPTF 3/8"

M18x1,
R 3/8",
NPTF 3/8"

	■	■	■	■	■	■	■	■
	■	■	■	■	■	■	■	■
	■				■			■
	■	■		■		■		■
	■	■	■		■			
							■	
					p. 45	p. 45...47 p.38...40,45...47	p. 40...41 p. 40...41	p. 51 p. 51 (6 bar)
				p. 27		p. 38...39, 45...47 (10 bar) p. 46...47	p. 40...41 (10 bar)	p. 51 (6 bar)
	p. 48	p. 49			p. 45	p. 45...47		
	p. 48	p. 49 (up to 8 mm)						
	p. 48	p. 49	p. 52		p. 45	p. 45...47		
	p. 48	p. 49	p. 52		p. 45	p. 45...47		
	p. 25	p. 26		p. 27				
						p. 38...40	p. 40...41	p. 51
	p. 25	p. 26		p. 27				
						p. 38...40	p. 40...41	p. 51
	p. 25	p. 26		p. 27				
					p. 45	p. 45...47		
	p. 48	p. 49 (up to 8 mm)						
		p. 26	p. 52					


i




Capacitive Sensors

Applications


Balluff capacitive sensors are ideal for presence detection of non-metallic objects and levels of granulates, powders, viscous media or liquids, whether conductive water-based or non-conductive fluids such as oil. No matter what industry you are in or what application you are trying to solve, Balluff will find the capacitive sensor to fit your need.




Quality content control inspection in the packaging industry




Level control in filling station




Presence detection



Flow or level control for reservoirs or tanks



Presence detection and analog thickness measurement of wood boards



Presence or absence detection of ampoules in pharmaceutical packaging industry

Balluff capacitive sensors are used in the following market segments:

- Handling and automation
- Specialty machinery building
- Automotive industry
- Semiconductor industry
- Electronics manufacturing industry (circuit boards, CD and DVD manufacturing, etc.)
- Food processing industry
- Bottling and packaging
- Chemical industry
- Industrial cleaning technology
- Pharmaceuticals and medical technology
- Plastics and rubber industry
- Timber and furniture industries
- Paper and printing industries
- Energy production

Capacitive Sensors Applications

Whether in coolant reservoir tanks or on glass bypass tubes, the capacitive sensor reliably detects levels of coolants, oils and other fluids to prevent damage to the machinery from running dry. Capacitive sensors are also suitable for leakage detection of hydraulic fluids to indicate early malfunction.

i





Object Detection

Contents

The industry standard capacitive sensors are M12 to M30 tubular housings. However, small parts detection or installations in tight mounting spaces require smaller form factors, therefore Balluff developed a capacitive product line that offers a large selection of sizes and form factors including miniature remote amplified versions. The product line also shows variety for different housing materials ranging from industrial rugged stainless steel to economical plastic grade versions.

Capacitive object detection sensors from Balluff employ a straight-line electrical field which is optimized for detection of solid bodies (e.g. wafers, PCBs, cartons, paper stacks, bottles, plastic blocks and plates) and liquid level detection through non-metallic container walls made of glass and plastic (thickness max. 4 mm).

Advantage: The straight-line electrical field in combination with the stainless steel housing allows Balluff BCS sensors to detect very low dielectric materials.



DC 3-wire
Tubular housings
Disc housings
Block-style
Adhesive sensor


DC 4-wire
Dynamic function diagnostics

DC 3-wire

Tubular housings	Ø 4 mm	14
	M5	14
	Ø 6.5 mm	15
	M8	16
	Ø 10 mm	17
	M12	18
	M18	19
	Ø 22 mm	21
	Ø 30 mm	21
	M30	21
	Ø 34 mm	22
Disc housings	Ø 18 mm	23
	Ø 22 mm	23
	Ø 30 mm	24
	Ø 50 mm	25
Block-style housings	16x34x8 mm Micro-Box	26
Adhesive sensor	90x16x4 mm	27

DC 4-wire

Dynamic function diagnostics	Ø 20 mm	28
------------------------------	---------	----

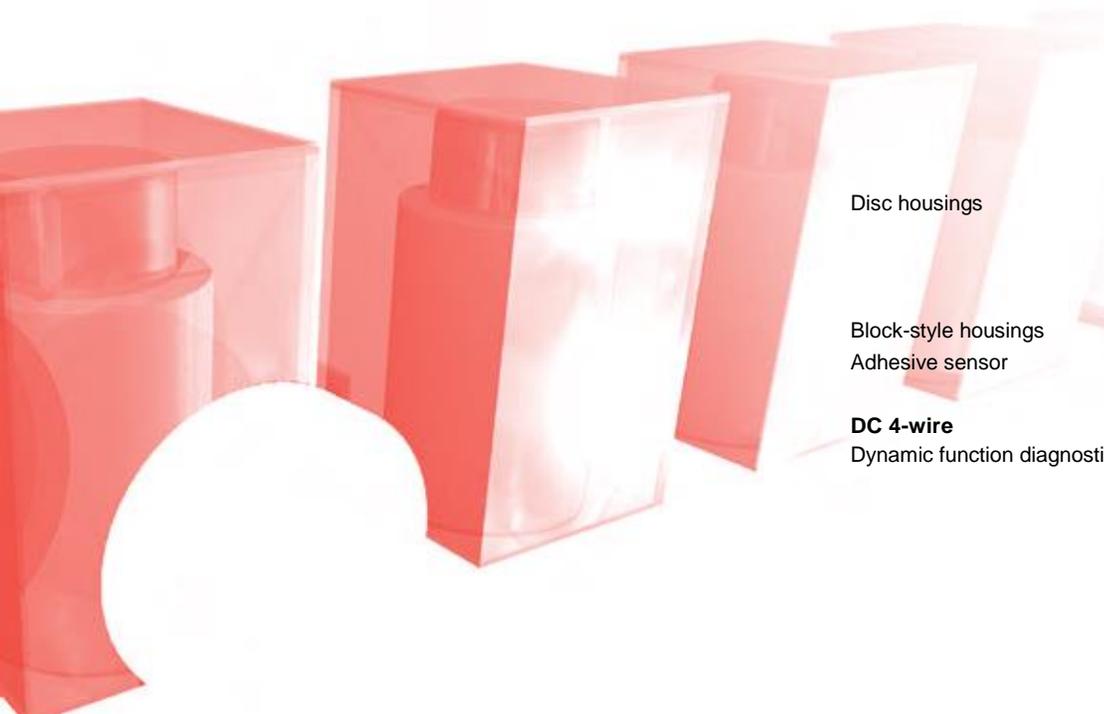


For power supplies, amplifiers, connectors and mounting brackets see accessories section starting page 55




Object Detection

DC 3-wire Tubular housings

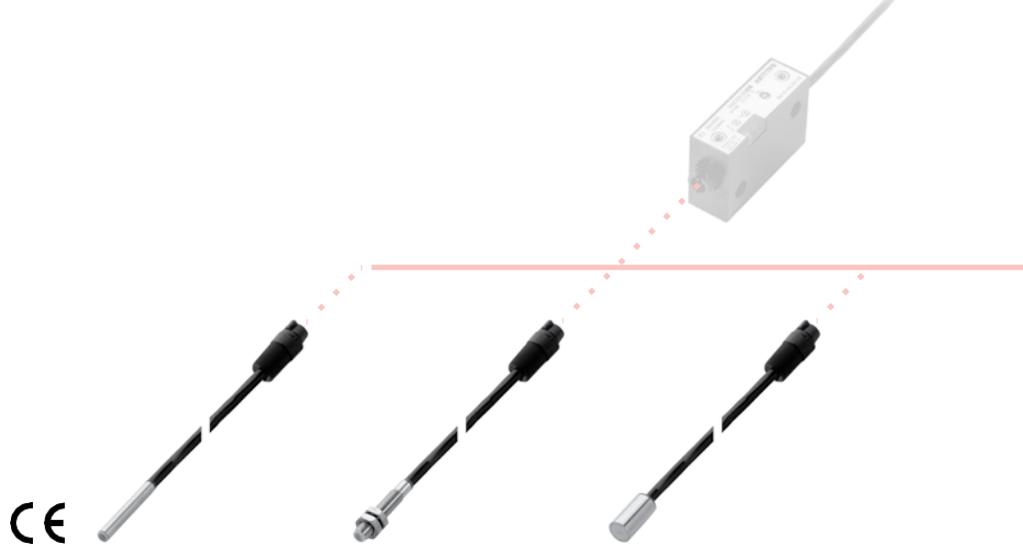

Housing size	Ø 4 mm	M5x0.5	Ø 6.5 mm
Mounting	flush	flush	flush
Rated switching distance s_n	0.1...1 mm	0.1...1 mm	0.1...1.5 mm
With sensor amplifier	Ordering code Part number	Ordering code Part number	Ordering code Part number
PNP Normally open	BCS0010 BCS G04T4D-XXS10C-EP02-GZ01-002	BCS0011 BCS M05T4C-XXS10C-EP02-GZ01-002	BCS0012 BCS G06T4B-XXS15C-EP02-GZ01-002
PNP Normally closed	Ordering code Part number		
NPN Normally open	Ordering code Part number		
NPN Normally closed	Ordering code Part number		
Supply voltage U_s	4...8 V DC	4...8 V DC	4...8 V DC
Voltage drop U_d at I_e			
Rated insulation voltage U_i	75 V DC	75 V DC	75 V DC
Output current max.			
No-load supply current I_o max.			
Reverse polarity/short circuit protected			
Ambient temperature range T_a	-30...+80 °C	-30...+80 °C	-30...+80 °C
Switching frequency f	100 Hz	100 Hz	100 Hz
Output function indicator			
Degree of protection per IEC 60529	IP 67	IP 67	IP 67
Material	Housing	V2A	V2A
	Sensing face	PTFE	PTFE
Wiring	Cover	POM	POM
		2 m cable PUR, 3x0.14 mm ²	2 m cable PUR, 3x0.14 mm ²

For sensor amplifiers see
Accessories section
Page 57

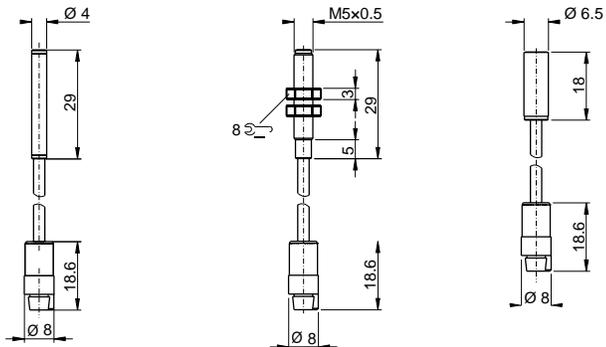

Object Detection






DC 3-wire Tubular housings



DC 3-wire
Tubular housings
Disc housings
Block-style
Adhesive sensor

DC 4-wire
Dynamic function
diagnostics

	Ø 6.5 mm non-flush 0.1...3 mm BCS0013 BCS G06T4B-XXS30G-EP02-GZ01-002	Ø 6.5 mm flush 0.1...1.5 mm BCS001R BCS G06T4D2-PSM15C-S49G BCS001T BCS G06T4D2-POM15C-S49G BCS001U BCS G06T4D2-NSM15C-S49G BCS001W BCS G06T4D2-NOM15C-S49G	Ø 6.5 mm flush 0.1...1.5 mm BCS001L BCS G06T4E1-PSM15C-EP02 BCS001M BCS G06T4E1-POM15C-EP02 BCS001N BCS G06T4E1-NSM15C-EP02 BCS001P BCS G06T4E1-NOM15C-EP02	Ø 6.5 mm non-flush 0.1...3 mm BCS0022 BCS G06T4D2-PSM30G-S49G BCS0023 BCS G06T4D2-POM30G-S49G BCS0024 BCS G06T4D2-NSM30G-S49G BCS0025 BCS G06T4D2-NOM30G-S49G	Ø 6.5 mm non-flush 0.1...3 mm BCS001Y BCS G06T4E1-PSM30G-EP02 BCS001Z BCS G06T4E1-POM30G-EP02 BCS0020 BCS G06T4E1-NSM30G-EP02 BCS0021 BCS G06T4E1-NOM30G-EP02
	4...8 V DC	11...30 V DC	11...30 V DC	11...30 V DC	11...30 V DC
	75 V DC	≤ 2 V 75 V DC	≤ 2 V 75 V DC	≤ 2 V 75 V DC	≤ 2 V 75 V DC
		50 mA	50 mA	50 mA	50 mA
		≤ 10 mA	≤ 10 mA	≤ 10 mA	≤ 10 mA
		yes/yes	yes/yes	yes/yes	yes/yes
	-30...+80 °C	-10...+70 °C	-10...+70 °C	-10...+70 °C	-10...+70 °C
	100 Hz	100 Hz	100 Hz	100 Hz	100 Hz
	IP 67	LED yellow IP 65	LED yellow IP 65	LED yellow IP 65	LED yellow IP 65
	V2A	V2A	V2A	V2A	V2A
	PTFE	PTFE	PTFE	PTFE	PTFE
	POM	PA	POM	PA	POM
	2 m cable PUR, 3x0.14 mm ²	M8 connector, 3-pin	2 m cable PUR, 3x0.14 mm ²	M8 connector, 3-pin	2 m cable PUR, 3x0.14 mm ²



For power supplies, amplifiers, connectors and mounting brackets see accessories section starting page 55






Object Detection

DC 3-wire Tubular housings



Housing size		M8 × 1	M8 × 1	M8 × 1	
Mounting		flush	non-flush	flush	
Rated switching distance s_n		0.1...1.5 mm	0.1...3 mm	0.1...1.5 mm	
With sensor amplifier	Ordering code	BCS0014	BCS0015		
	Part number	BCS M08T4C-XXS15C-EP02-GZ01-002	BCS M08T4C1-XXS30G-EP02-GZ01-002		
PNP Normally open	Ordering code			BCS002A	
	Part number			BCS M08T4E2-PSM15C-S49G	
PNP Normally closed	Ordering code			BCS002C	
	Part number			BCS M08T4E2-POM15C-S49G	
NPN Normally open	Ordering code			BCS002E	
	Part number			BCS M08T4E2-NSM15C-S49G	
NPN Normally closed	Ordering code			BCS002F	
	Part number			BCS M08T4E2-NOM15C-S49G	
Supply voltage U_s		4...8 V DC	4...8 V DC	11...30 V DC	
Voltage drop U_d at I_o				≤ 2 V	
Rated insulation voltage U_i		75 V DC	75 V DC	75 V DC	
Output current max.				50 mA	
No-load supply current I_o max.				≤ 10 mA	
Reverse polarity/short circuit protected				yes/yes	
Ambient temperature range T_a		-30...+80 °C	-30...+80 °C	-10...+70 °C	
Switching frequency f		100 Hz	100 Hz	100 Hz	
Output function indicator				LED yellow	
Degree of protection per IEC 60529		IP 67	IP 67	IP 65	
Material	Housing	V2A	V2A	V2A	
	Sensing face	PTFE	PTFE	PTFE	
	Cover	POM	POM	V2A	
Wiring		2 m cable PUR, 3×0.14 mm ²	2 m cable PUR, 3×0.14 mm ²	M8 connector, 3-pin	

For sensor amplifiers see
Accessories section
Page 57



Object Detection

DC 3-wire Tubular housings








DC 3-wire
Tubular housings
Disc housings
Block-style
Adhesive sensor

DC 4-wire
Dynamic function
diagnostics



M8 x 1 flush 0.1...1.5 mm	M8 x 1 non-flush 0.1...3 mm	M8 x 1 non-flush 0.1...3 mm	Ø 10 mm flush 0.1...4 mm	Ø 10 mm non-flush 1...8 mm
			BCS0016 BCS G10T4B-XXS40C-EP02-GZ01-002	BCS0017 BCS G10T4C-XXS80G-EP02-GZ01-002
BCS0026 BCS M08T4E1-PSM15C-EP02	BCS002M BCS M08T4E2-PSM30G-S49G	BCS002H BCS M08T4E1-PSM30G-EP02		
BCS0027 BCS M08T4E1-POM15C-EP02	BCS002N BCS M08T4E2-POM30G-S49G	BCS002J BCS M08T4E1-POM30G-EP02		
BCS0028 BCS M08T4E1-NSM15C-EP02	BCS002P BCS M08T4E2-NSM30G-S49G	BCS002K BCS M08T4E1-NSM30G-EP02		
BCS0029 BCS M08T4E1-NOM15C-EP02	BCS002R BCS M08T4E2-NOM30G-S49G	BCS002L BCS M08T4E1-NOM30G-EP02		
11...30 V DC ≤ 2 V 75 V DC 50 mA ≤ 10 mA yes/yes -10...+70 °C 100 Hz LED yellow IP 65 V2A PTFE POM 2 m cable PUR, 3x0.14 mm ²	11...30 V DC ≤ 2 V 75 V DC 50 mA ≤ 10 mA yes/yes -10...+70 °C 100 Hz LED yellow IP 65 V2A PTFE V2A 2 m cable PUR, 3-pin	11...30 V DC ≤ 2 V 75 V DC 50 mA ≤ 10 mA yes/yes -10...+70 °C 100 Hz LED yellow IP 65 V2A PTFE POM 2 m cable PUR, 3x0.14 mm ²	4...8 V DC 75 V DC	4...8 V DC 75 V DC




For power
supplies,
amplifiers,
connectors
and mounting
brackets see
accessories
section starting
page 55



Object Detection

DC 3-wire Tubular housings

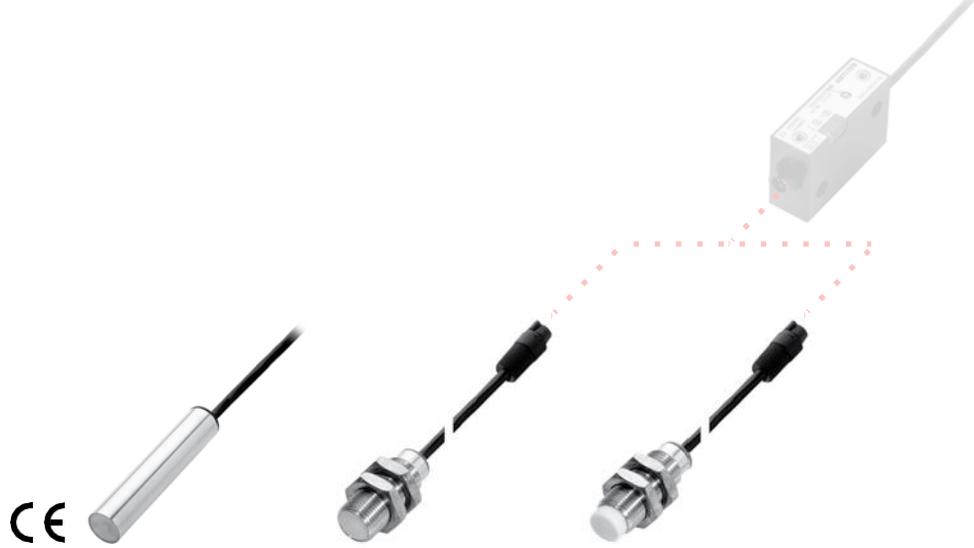


Housing size		Ø 10 mm	M12x1	M12x1
Mounting		flush	flush	non-flush
Rated switching distance s_n		1...4 mm	0.1...4 mm	1...8 mm
With sensor amplifier	Ordering code		BCS0018	BCS0019
	Part number		BCS M12T4D-XXS40C-EP02-GZ01-002	BCS M12T4D1-XXS80G-EP02-GZ01-002
PNP Normally open	Ordering code	BCS002T		
	Part number	BCS G10T4H-PSM40C-EP02		
PNP Normally closed	Ordering code	BCS002U		
	Part number	BCS G10T4H-POM40C-EP02		
NPN Normally open	Ordering code	BCS002W		
	Part number	BCS G10T4H-NSM40C-EP02		
NPN Normally closed	Ordering code	BCS002Y		
	Part number	BCS G10T4H-NOM40C-EP02		
Supply voltage U_s		12...35 V DC	4...8 V DC	4...8 V DC
Voltage drop U_d at I_o		≤ 0.8 V		
Rated insulation voltage U_i		75 V DC	75 V DC	75 V DC
Output current max.		200 mA		
No-load supply current I_o max.		≤ 10 mA		
Reverse polarity/short circuit protected		yes/yes		
Ambient temperature range T_a		-30...+70 °C	-30...+80 °C	-30...+80 °C
Switching frequency f		100 Hz	100 Hz	100 Hz
Output function indicator		LED yellow		
Degree of protection per IEC 60529		IP 65	IP 67	IP 67
Material	Housing	V2A	V2A	V2A
	Sensing face	PTFE	PTFE	PTFE
	Cover	POM	POM	POM
Wiring		2 m cable PUR, 3x0.14 mm ²	2 m cable PUR, 3x0.14 mm ²	2 m cable PUR, 3x0.14 mm ²

For sensor amplifiers see
Accessories section
Page 57



The flush mount sensors for object detection M12...M30 in plastic or PTFE housing provide IP 68 protection (at approx. 5 bar) at the sensing face.

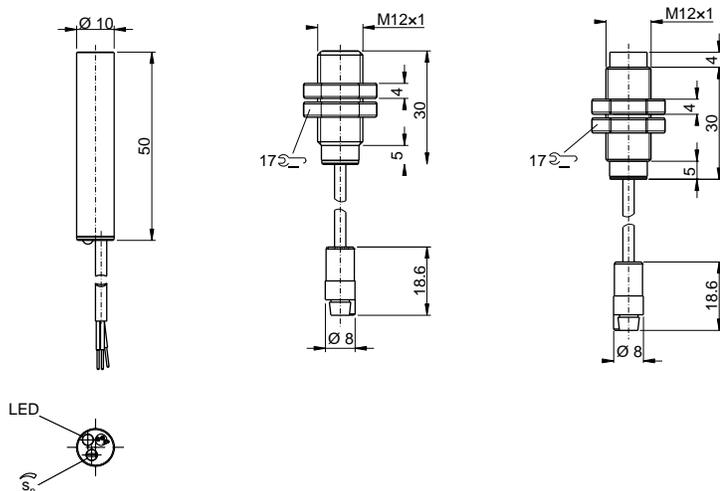

Object Detection






DC 3-wire Tubular housings



DC 3-wire
Tubular housings
Disc housings
Block-style
Adhesive sensor

DC 4-wire
Dynamic function
diagnostics

M12x1 flush 1...4 mm	M12x1 flush 1...4 mm	M12x1 flush 1...4 mm	M12x1 flush 1...4 mm	M18x1 flush 2...8 mm
BCS0037 BCS M12T4D2-PSM40C-S04G	BCS002Z BCS M12T4G1-PSM40C-EP02	BCS003T BCS M12VVD2-PSM40C-S04G	BCS003M BCS M12VVG1-PSM40C-EP02	BCS0047 BCS M18B4G2-PSC80C-S04G
BCS0038 BCS M12T4D2-POM40C-S04G	BCS0030 BCS M12T4G1-POM40C-EP02	BCS003U BCS M12VVD2-POM40C-S04G	BCS003N BCS M12VVG1-POM40C-EP02	BCS0049 BCS M18B4G2-POC80C-S04G
BCS0039 BCS M12T4D2-NSM40C-S04G	BCS0031 BCS M12T4G1-NSM40C-EP02	BCS003W BCS M12VVD2-NSM40C-S04G	BCS003P BCS M12VVG1-NSM40C-EP02	BCS004C BCS M18B4G2-NSC80C-S04G
BCS00AC BCS M12T4D2-NOM40C-S04G	BCS0032 BCS M12T4G1-NOM40C-EP02	BCS003Y BCS M12VVD2-NOM40C-S04G	BCS003R BCS M12VVG1-NOM40C-EP02	BCS004F BCS M18B4G2-NOC80C-S04G
12...35 V DC ≤ 0.8 V 75 V DC 200 mA ≤ 10 mA yes/yes -30...+70 °C 100 Hz LED yellow IP 65 V2A PTFE PA M12 connector, 4-pin, A-coded	12...35 V DC ≤ 0.8 V 75 V DC 200 mA ≤ 10 mA yes/yes -30...+70 °C 100 Hz LED yellow IP 65 V2A PTFE POM 2 m cable PUR 3x0.14 mm ²	12...35 V DC ≤ 0.8 V 75 V DC 200 mA ≤ 10 mA yes/yes -30...+60 °C 100 Hz LED yellow IP 65 PVC PVC PA M12 connector, 4-pin, A-coded	12...35 V DC ≤ 0.8 V 75 V DC 200 mA ≤ 10 mA yes/yes -30...+70 °C 100 Hz LED yellow IP 65 PVC PVC PVC 2 m cable PUR 3x0.14 mm ²	10...35 V DC ≤ 1.5 V 75 V DC 300 mA ≤ 10 mA yes/yes -30...+70 °C 100 Hz LED yellow IP 67 V2A PBT PA M12 connector, 4-pin, A-coded

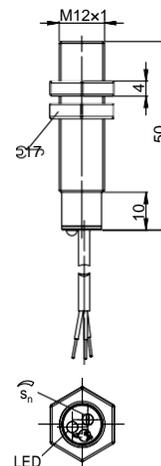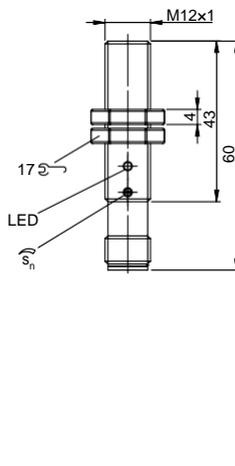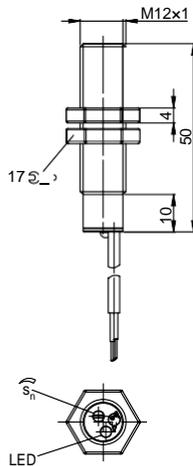

For power supplies, amplifiers, connectors and mounting brackets see accessories section starting page 55



Object Detection


DC 3-wire Tubular housings



Housing size		M18x1	M18x1	M18x1
Mounting		flush	flush	flush
Rated switching distance s_n		2...8 mm	2...8 mm	2...8 mm
PNP Normally open	Ordering code	BCS0040	BCS0046	BCS003Z
	Part number	BCS M18B4M-PSC80C-EV02	BCS M18VVG2-PSC80C-S04G	BCS M18VVM1-PSM80C-EV02
PNP Normally closed	Ordering code	BCS0042	BCS0048	BCS0041
	Part number	BCS M18B4M-POC80C-EV02	BCS M18VVG2-POC80C-S04G	BCS M18VVM1-POM80C-EV02
PNP NO/NC selectable	Ordering code			
	Part number			
NPN Normally open	Ordering code	BCS0044	BCS004A	BCS0043
	Part number	BCS M18B4M-NSC80C-EV02	BCS M18VVG2-NSC80C-S04G	BCS M18VVM1-NSM80C-EV02
NPN Normally closed	Ordering code	BCS004E	BCS004E	BCS0045
	Part number	BCS M18B4M-NOC80C-EV02	BCS M18VVG2-NOC80C-S04G	BCS M18VVM1-NOM80C-EV02
NPN NO/NC selectable	Ordering code			
	Part number			
Supply voltage U_s		10...35 V DC	10...35 V DC	10...35 V DC
Voltage drop U_d at I_o		≤ 1.5 V	≤ 1.5 V	≤ 1.5 V
Rated insulation voltage U_i		75 V DC	75 V DC	75 V DC
Output current max.		300 mA	300 mA	300 mA
No-load supply current I_o max.		≤ 10 mA	≤ 10 mA	≤ 10 mA
Reverse polarity/short circuit protected		yes/yes	yes/yes	yes/yes
Ambient temperature range T_a		-30...+70 °C	-30...+60 °C	-30...+60 °C
Switching frequency f		100 Hz	100 Hz	100 Hz
Power indicator				
Output function indicator		LED yellow	LED yellow	LED yellow
Degree of protection per IEC 60529		IP 67	IP 67	IP 67
Material	Housing	V2A	PVC	PVC
	Sensing face	PBT	PVC	PVC
	Cover	PBT	PA	PBT
Wiring		2 m cable PVC, 3x0.25 mm ²	M12 connector, 4-pin, A-coded	2 m cable PVC, 3x0.25 mm ²



The flush mount sensors for object detection M12...M30 in plastic or PTFE housing provide IP 68 protection (at approx. 5 bar) at the sensing face.

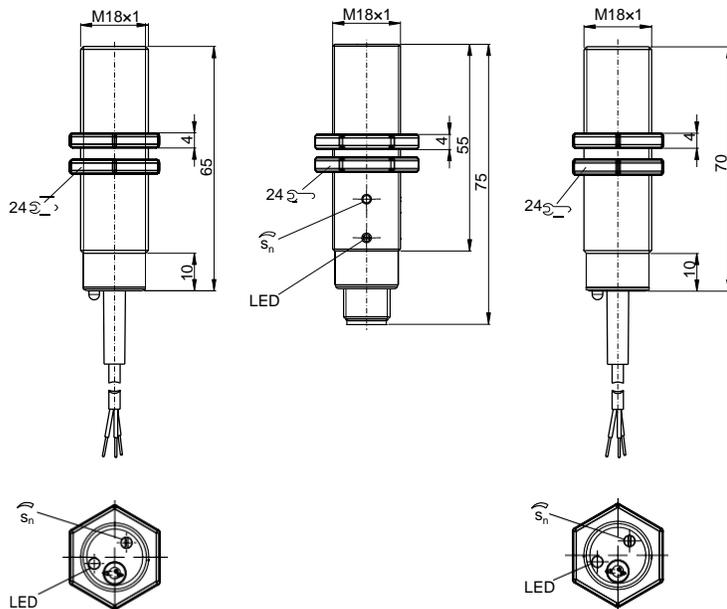

Object Detection











DC 3-wire Tubular housings



DC 3-wire
Tubular housings
Disc housings
Block-style
Adhesive sensor

DC 4-wire
Dynamic function
diagnostics

	Ø 22 mm	Ø 30 mm	M30x1.5	M30x1.5	M30x1.5
	flush	flush	flush	flush	flush
	2...10 mm	2...20 mm	1...20 mm	1...20 mm	1...20 mm
	BCS0033				
	BCS D22V4M1-PSC10C-EV02				
	BCS0034				
	BCS D22V4M1-POC10C-EV02				
		BCS004H	BCS004T	BCS004P	BCS004M
		BCS D30B4M3-PPC20C-EP02	BCS M30B4M2-PPM20C-S04G	BCS M30B4M3-PPM20C-EP02	BCS M30BBM2-PPM20C-S04G
	BCS0035				
	BCS D22V4M1-NSC10C-EV02				
	BCS0036				
	BCS D22V4M1-NOC10C-EV02				
		BCS004J	BCS004U	BCS004R	BCS004N
		BCS D30B4M3-NPC20C-EP02	BCS M30B4M2-NPM20C-S04G	BCS M30B4M3-NPM20C-EP02	BCS M30BBM2-NPM20C-S04G
	10...35 V DC	10...35 V DC	10...35 V DC	10...35 V DC	10...35 V DC
	≤ 1.5 V	≤ 1.8 V	≤ 1.8 V	≤ 1.8 V	≤ 1.8 V
	75 V DC	75 V DC	75 V DC	75 V DC	75 V DC
	300 mA	300 mA	300 mA	300 mA	300 mA
	≤ 10 mA	≤ 15 mA	≤ 15 mA	≤ 15 mA	≤ 15 mA
	yes/yes	yes/yes	yes/yes	yes/yes	yes/yes
	-30...+60 °C	-30...+70 °C	-30...+70 °C	-30...+70 °C	-30...+70 °C
	100 Hz	100 Hz	100 Hz	100 Hz	100 Hz
	LED yellow	LED green	LED green	LED green	LED green
	IP 67	LED yellow	LED yellow	LED yellow	LED yellow
	V2A	IP 64	IP 64	IP 64	IP 64
	PVC	V2A	V2A	V2A	PBT
	PVC	PBT	PBT	PBT	PBT
	2 m cable PVC, 3x0.25 mm ²	PBT/PE	PBT/PE	PBT/PE	PBT/PE
		2 m cable PUR, 3x0.34 mm ²	M12 connector, 4-pin, A-coded	2 m cable PUR, 3x0.34 mm ²	M12 connector, 4-pin, A-coded

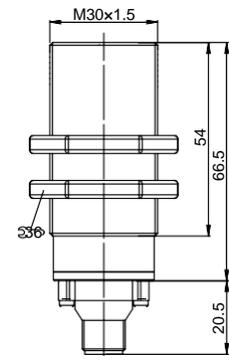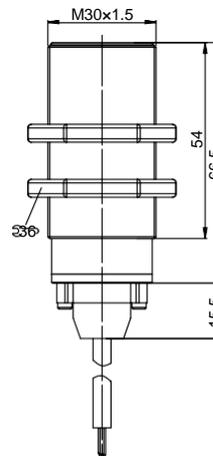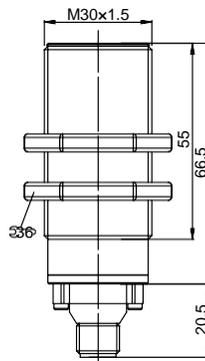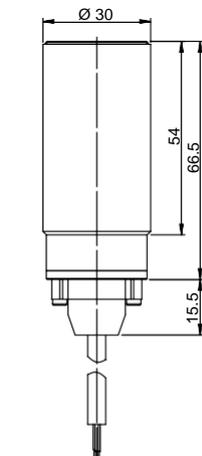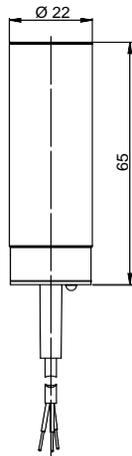

For power supplies, amplifiers, connectors and mounting brackets see accessories section starting page 55



Object Detection

DC 3-wire Tubular housings




Housing size	M30x1.5	Ø 34 mm	Ø 34 mm
Mounting	flush	flush	flush
Rated switching distance s_n	1...20 mm	1...25 mm	1...25 mm
With sensor amplifier	Ordering code		
	Part number		
PNP NO/NC selectable	Ordering code	BCS004K	BCS004Z
	Part number	BCS M30BBM3-PPC20C-EP02	BCS G34VVM2-PPM20C-S04G
NPN NO/NC selectable	Ordering code	BCS004L	BCS0050
	Part number	BCS M30BBM3-NPC20C-EP02	BCS G34VVM2-NPM20C-S04G
Supply voltage U_s	10...35 V DC	10...35 V DC	10...35 V DC
Voltage drop U_d at I_a	≤ 1.8 V	≤ 1.8 V	≤ 1.8 V
Rated insulation voltage U_i	75 V DC	75 V DC	75 V DC
Output current max.	300 mA	300 mA	300 mA
No-load supply current I_o max.	≤ 15 mA	≤ 15 mA	≤ 15 mA
Reverse polarity/short circuit protected	yes/yes	yes/yes	yes/yes
Ambient temperature range T_a	-30...+70 °C	-30...+70 °C	-30...+70 °C
Switching frequency f	100 Hz	100 Hz	100 Hz
Power indicator	LED green	LED green	LED green
Output function indicator	LED yellow	LED yellow	LED yellow
Degree of protection per IEC 60529	IP 64	IP 64	IP 64
Material	Housing	PBT	PVC
	Sensing face	PBT	PVC
	Cover	PBT/PE	PBT/PE
Wiring	2 m cable PUR, 3x0.34 mm ²	M12 connector, 4-pin, A-coded	2 m cable PUR, 3x0.34 mm ²

For sensor amplifiers see Accessories section Page 57



The flush mount sensors for object detection M12...M30 in plastic or PTFE housing provide IP 68 protection (at approx. 5 bar) at the sensing face.

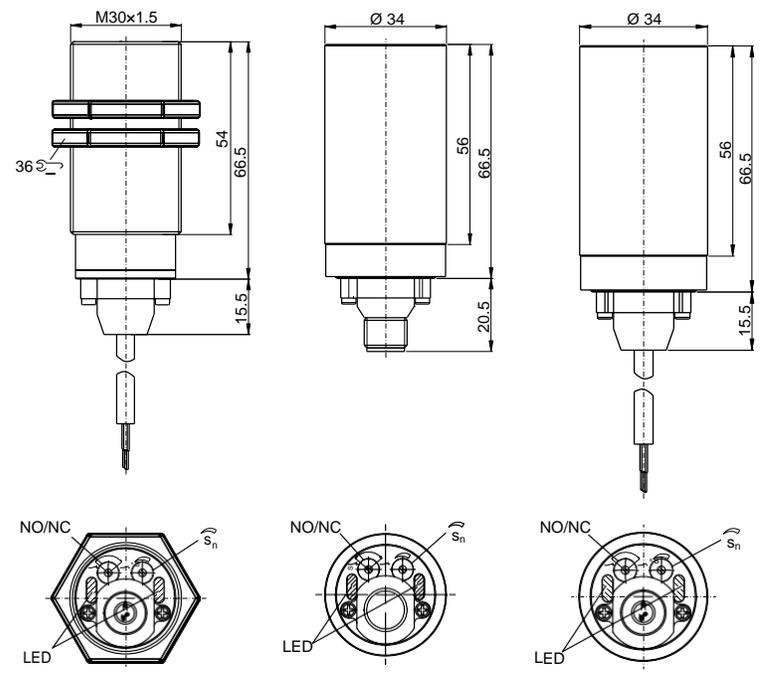

Object Detection


DC 3-wire Tubular housings



DC 3-wire
Tubular
housings
Disc
housings
Block-style
Adhesive sensor

DC 4-wire
Dynamic function
diagnostics

Ø 18x2.5 mm	Ø 18x4 mm	Ø 18x10 mm	Ø 22x4 mm	Ø 22x10 mm
flush	flush	flush	flush	flush
0.1...3 mm	1...5 mm	1...5 mm	1...10 mm	1...10 mm
BCS001A	BCS001C	BCS001E	BCS001F	BCS001H
BCS D18T403-XXS30C-EP02-GZ01-002	BCS D18T404-XXS50C-EP02-GZ01-002	BCS D18T407-XXS50C-EP02-GZ01-002	BCS D22T405-XXS10C-EP02-GZ01-002	BCS D22T408-XXS10C-EP02-GZ01-002
4...8 V DC				
75 V DC				
-30...+70 °C	-30...+80 °C	-30...+80 °C	-30...+80 °C	-30...+80 °C
100 Hz				
IP 66				
V2A	V2A	V2A	V2A	V2A
PTFE	PTFE	PTFE	PTFE	PTFE
2 m cable PVC, 3x0.09 mm ²	2 m cable PUR, 3x0.14 mm ²			

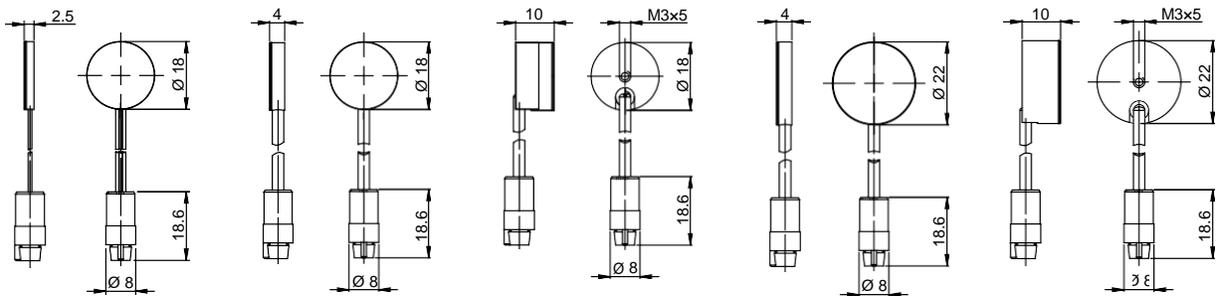

For power
supplies,
amplifiers,
connectors
and mounting
brackets see
accessories
section starting
page 55




Object Detection

DC 3-wire Disc housings



Housing size		Ø 22x4 mm	Ø 22x4 mm	Ø 30x4 mm	
Mounting		flush	flush	flush	
Rated switching distance s_n		6 mm ±10 %	6 mm ±10 %	1...15 mm	
With sensor amplifier	Ordering code			BCS001J	
	Part number			BCS D30T406-XXS15C-EP02-GZ01-002	
PNP Normally open	Ordering code	BCS003H	BCS00HK		
	Part number	BCS D22T403-PSM60C-EP02	BCS D22T402-PSM60C-EP02		
PNP Normally closed	Ordering code				
	Part number				
NPN Normally open	Ordering code	BCS003J			
	Part number	BCS D22T403-NSM60C-EP02			
NPN Normally closed	Ordering code				
	Part number				
PNP/NPN and NO/NC selectable	Ordering code				
	Part number				
Supply voltage U_s		12...30 V DC	12...30 V DC	4...8 V DC	
Voltage drop U_d at I_o		≤ 0.8 V	≤ 0.8 V		
Rated insulation voltage U_i		75 V DC	75 V DC	75 V DC	
Output current max.		300 mA	300 mA		
No-load supply current I_o max.		≤ 10 mA	≤ 10 mA		
Reverse polarity/short circuit protected		yes/yes	yes/yes		
Ambient temperature range T_a		-30...+70 °C	-30...+70 °C	-30...+80 °C	
Switching frequency f		100 Hz	100 Hz	100 Hz	
Output function indicator					
Degree of protection per IEC 60529		IP 64	IP 64	IP 66	
Material	Housing	V2A	V2A	V2A	
	Sensing face	PTFE	PTFE	PTFE	
	Cover				
Wiring		2 m cable PUR, 3x0.14 mm ²	2 m cable PUR, 3x0.14 mm ²	2 m cable PUR, 3x0.14 mm ²	

For sensor amplifiers see
Accessories section
Page 57

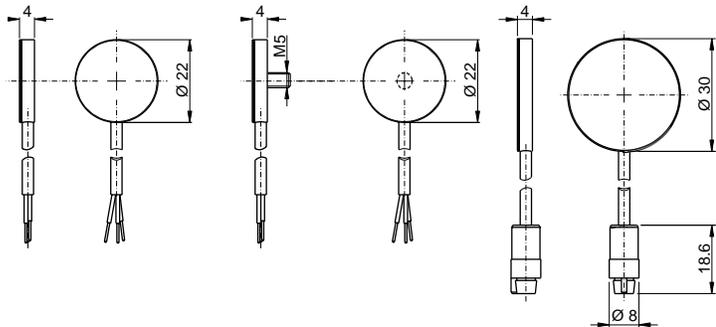

Object Detection

DC 3-wire Disc housings




DC 3-wire
Tubular
housings
**Disc
housings**
Block-style
Adhesive sensor

DC 4-wire
Dynamic function
diagnostics



Ø 30x10 mm flush 1...15 mm BCS001K BCS D30T409-XXS15C-EP02-GZ01-002	Ø 30x4 mm flush 2...15 mm	Ø 50x10 mm flush 2...25 mm	Ø 50x10 mm flush 2...25 mm	
	BCS003A BCS D30T401-PSC15C-EP02			
	BCS003C BCS D30T401-POC15C-EP02			
	BCS003E BCS D30T401-NSC15C-EP02			
	BCS003F BCS D30T401-NOC15C-EP02			
		BCS003L BCS D500003-YPC25C-S49G	BCS003K BCS D500002-YPC25C-EV02	
4...8 V DC	10...35 V DC	10...30 V DC	10...30 V DC	
75 V DC	≤ 0.8 V 75 V DC 300 mA ≤ 10 mA	≤ 1.5 V 75 V DC 150 mA ≤ 15 mA	≤ 2 V 75 V DC 150 mA ≤ 15 mA	
-30...+80 °C	yes/yes -30...+70 °C	yes/yes -30...+60 °C	yes/yes -30...+60 °C	
100 Hz	100 Hz	50 Hz	50 Hz	
IP 66	LED yellow IP 67	LED yellow IP 65	LED yellow IP 67	
V2A	V2A	POM	POM	
PTFE	PTFE	POM	POM	
		POM	POM	
2 m cable PUR, 3x0.14 mm ²	2 m cable PUR, 3x0.14 mm ²	M8 connector, 3-pin	2 m cable PVC, 3x0.25 mm ²	

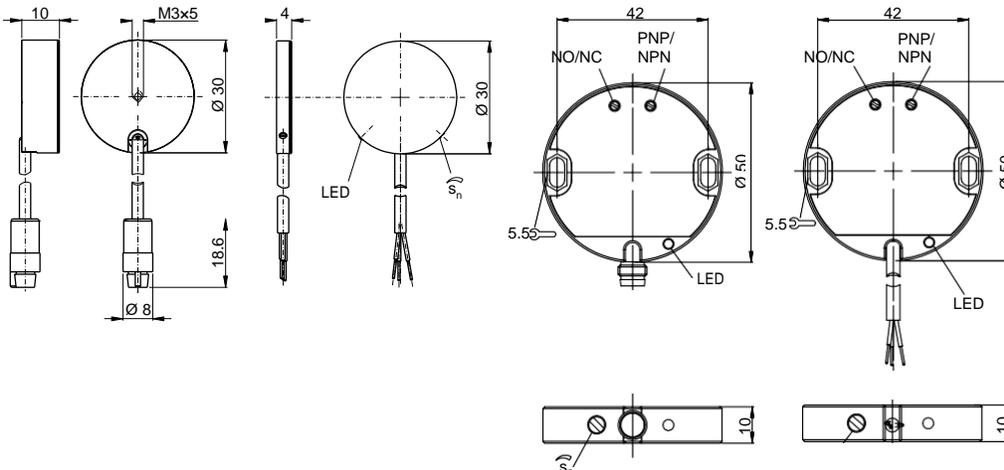

For power
supplies,
amplifiers,
connectors
and mounting
brackets see
accessories
section starting
page 55




Object Detection

DC 3-wire Block-style housings



Housing size	16x34x8 mm Micro-Box		16x34x8 mm Micro-Box
Mounting	flush		flush
Rated switching distance s_n	1...8 mm		1...8 mm
PNP Normally open	Ordering code	BCS0055	BCS0051
	Part number	BCS R08RR01-PSM80C-EP00,2-GS49	BCS R08RR01-PSM80C-EP02
PNP Normally closed	Ordering code	BCS0056	BCS0052
	Part number	BCS R08RR01-POM80C-EP00,2-GS49	BCS R08RR01-POM80C-EP02
NPN Normally open	Ordering code	BCS0057	BCS0053
	Part number	BCS R08RR01-NSM80C-EP00,2-GS49	BCS R08RR01-NSM80C-EP02
NPN Normally closed	Ordering code	BCS0058	BCS0054
	Part number	BCS R08RR01-NOM80C-EP00,2-GS49	BCS R08RR01-NOM80C-EP02
Supply voltage U_s	12...30 V DC		12...30 V DC
Voltage drop U_o at I_o	≤ 1.5 V		≤ 1.5 V
Rated insulation voltage U_i	75 V DC		75 V DC
Output current max.	50 mA		50 mA
No-load supply current I_o max.	≤ 10 mA		≤ 10 mA
Reverse polarity/short circuit protected	yes/yes		yes/yes
Ambient temperature range T_a	$-30...+70$ °C		$-30...+70$ °C
Switching frequency f	100 Hz		100 Hz
Output function indicator	LED yellow		LED yellow
Degree of protection per IEC 60529	IP 67		IP 67
Material	Housing	PP	PP
	Sensing face	PP	PP
	Cover	PP	PP
Wiring	0.2 m cable PUR, 3x0.14 mm ² with M8 connector, 3-pin		2 m cable PUR, 3x0.14 mm ²

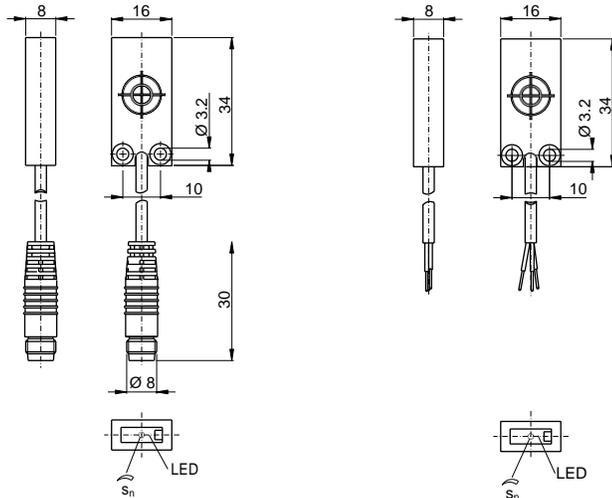


Mounting frame included in scope of delivery

Mounting frame included in scope of delivery

Object Detection

DC 3-wire Adhesive sensor


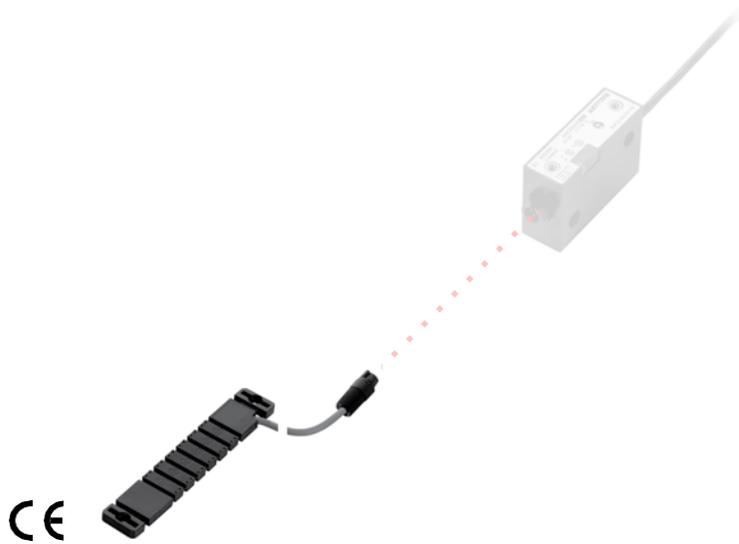


DC 3-wire
Tubular housings
Disc housings
Block-style Adhesive sensor

DC 4-wire
Dynamic function diagnostics

Housing size	90×16×4 mm	
Mounting	flush	
Rated switching distance s_n	0...10 mm	
With sensor amplifier	Ordering code	BCS000Y
	Part number	BCS F01CP01-XXS10C-EP02-GZ01-002
Supply voltage U_s	4...8 V DC	
Rated insulation voltage U_i (protection class)	75 V DC	
Ambient temperature range T_a	0...+60 °C	
Switching frequency f	100 Hz	
Degree of protection per IEC 60529	IP 60	
Material	Housing	PC/PUR
	Sensing face	PUR
Wiring	2 m cable PUR, 3×0.14 mm ²	

For sensor amplifiers see
Accessories section
Page 57

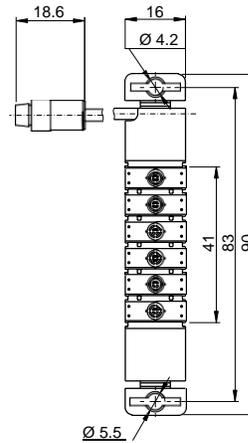

Minimum bending
diameter 20 mm

For power supplies, amplifiers, connectors and mounting brackets see accessories section starting page 55



Object Detection

DC 4-wire Dynamic function diagnostics

Function

Balluff BCS capacitive sensors with internal dynamic self-diagnostics allow monitoring of the sensor functions including the cable connection.

The internal oscillator circuit uses a modulated pulse generator forcing the oscillator to change state for specific frequency and pulse duration. In the event of a damaged sensing head or oscillator circuit or consecutive electronics, the pulse generator can no longer change state resulting a loss of pulses on the output.

The pulse frequency is $f \sim 160$ Hz with a pulse duration of $t \sim 300$ μ s. The pulse-pause ratio of $t \sim 5\%$ is selected small enough so that the test pulses can be easily filtered out by the input filter of a controller, to allow, for example, a directly driven relay. The switching condition information "proximity switch damped or undamped" can therefore be processed in the usual fashion.

Function monitoring

In order to evaluate the test pulses, additional electronics or sufficient I/O logic on the input controller is required. Balluff offers a function diagnostics unit which can be easily integrated into existing control logic.





Note!

This self-monitoring system is not suitable or certified for personal safety applications. For additional information please request a detailed description.

Installation notes

The signal line for the function diagnostics unit should be connected as close to the load R_L as possible (Point A).

When Point B is connected the cable segment between B and load R_L is not monitored.

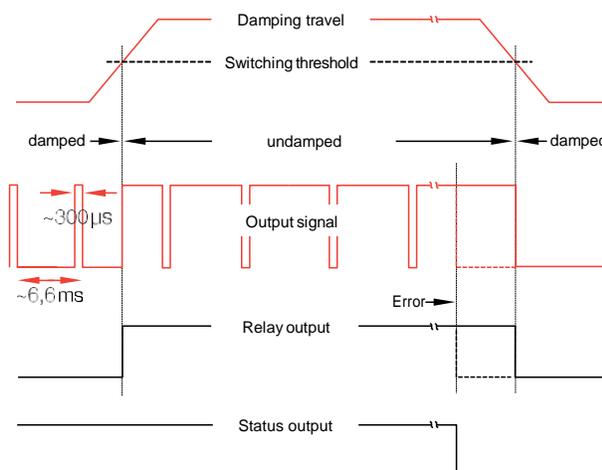

Pulse diagram of a proximity switch with function diagnostics (normally closed)

Object Detection

DC 4-wire Dynamic function diagnostics
 Ø 20 mm



Housing size	Ø 20 mm
Mounting	flush
Rated switching distance s_n	10 mm
PNP Complementary	Ordering code
	BCS0001
	Part number
	BCS 20MG10-XPA1Y-8B-03
Supply voltage U_s	10...30 V DC
Voltage drop U_d at I_a	≤ 3.5 V
Rated insulation voltage U_i	75 V DC
Output current max.	130 mA
No-load supply current I_o max.	≤ 10 mA
Reverse polarity/short circuit protected	yes/yes
Ambient temperature range T_a	+10...+50 °C
Switching frequency f	100 Hz
Power indicator	LED green
Output function indicator	LED yellow
Degree of protection per IEC 60529	IP 63
Material	Housing
	V2A
	Sensing face
	EP
Wiring	3 m cable PUR, 4x0.25 mm ²




DC 3-wire
 Tubular
 housings
 Disc housings
 Block-style
 Adhesive sensor

DC 4-wire
**Dynamic
 function
 diagnostics**




Function diagnostics unit
 with electronic output,
 see Accessories section, page 63

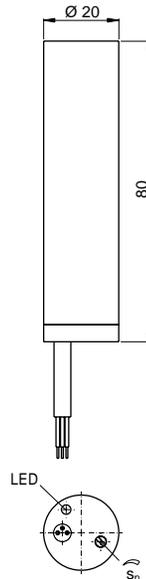

For power
 supplies,
 amplifiers,
 connectors
 and mounting
 brackets see
 accessories
 section starting
 page 55



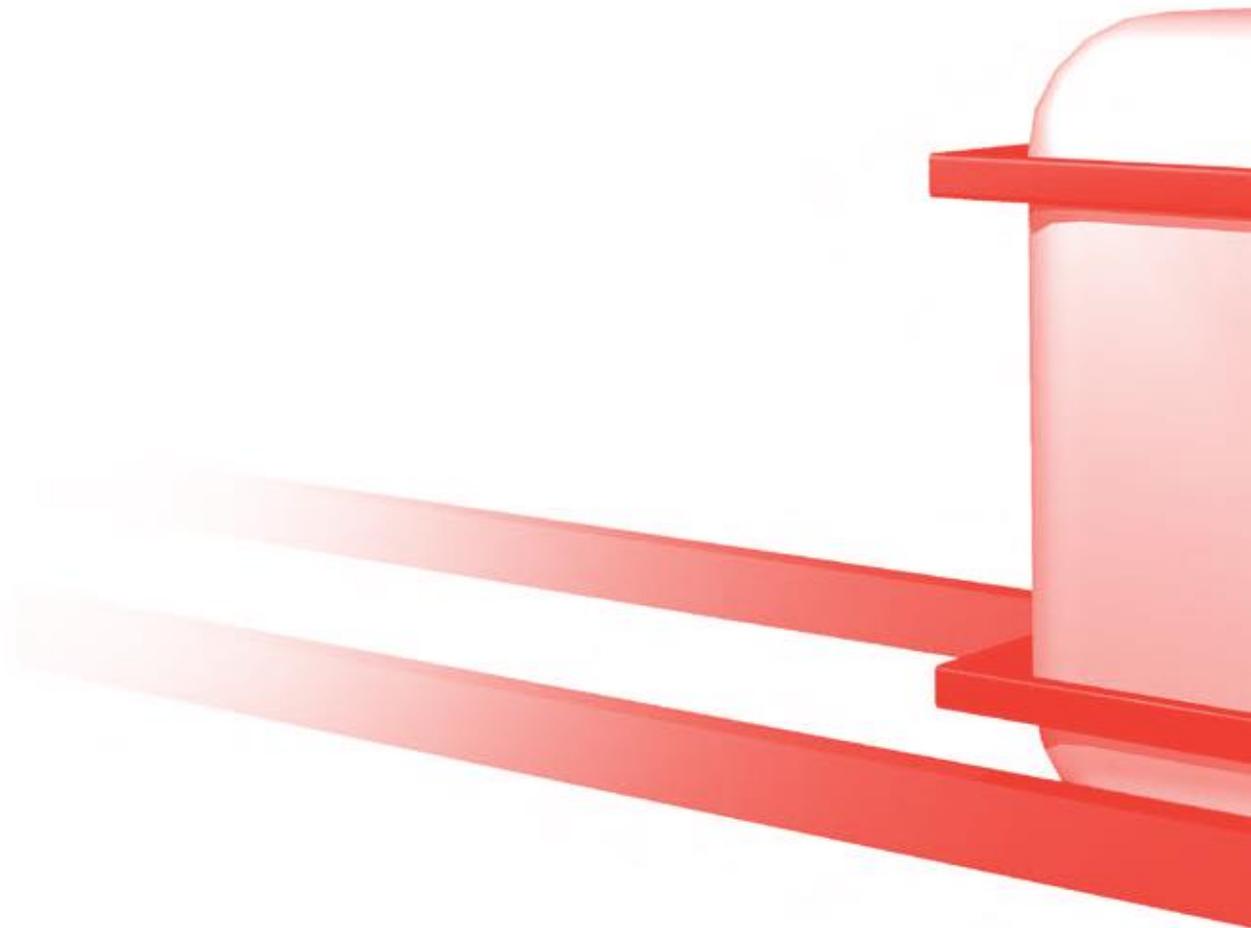

Capacitive sensors for level detection use their sensing face to detect the product, bulk material or liquid (e.g. plastic granulate, sugar, oil, aqueous media) directly or through a container wall.

Advantage: Their spherical electrical field effectively compensates for build-up on the sensing face of the sensor.



Tubular housings	M12	32
	M18	34
	M30	36
	M12 Micro-Level	38
	G 1/4" Micro-Level	38
	NPT 1/4" Micro-Level	38
	M18	40
	R 3/8"	41
	NPTF 3/8"	41
SMARTLEVEL technology	M18	43
	M30	44
	Ø 7 mm	45
	M12 Micro-Level	45
	G 1/4" Micro-Level	45
	NPT 1/4" Micro-Level	45
	Ø 50 mm 16x34x8 mm Micro-Box	48 49
High temperature	M18	51
	M30	51
	R 3/8"	51
	NPTF 3/8"	51
Leak sensor	36x44x10 mm	52
Tubular housings	M18	53
	M30	53
	Ø 34 mm	53



DC 3-wire

Tubular housings

SMART technology

High temperature rated styles

Leak sensor

AC/DC 2-wire


Tubular housings

For power supplies, amplifiers, connectors and mounting brackets see accessories section starting **page 55**



Level Detection





DC 3-wire Tubular housings
M12

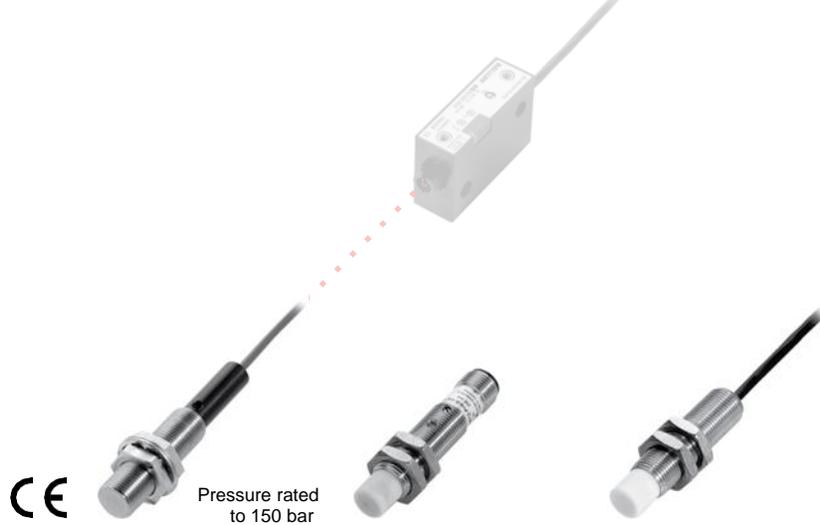

Pressure rated
to 150 bar

Housing size	M12x1	M12x1	M12x1	
Mounting	flush	non-flush	non-flush	
Rated switching distance s_n	1 mm	1...8 mm	1...8 mm	
With sensor amplifier	Ordering code			
	Part number			
PNP Normally open	Ordering code	BCS0062	BCS005F	
	Part number	BCS M12T4D2-PSM80G-S04G	BCS M12T4G1-PSM80G-EP02	
PNP Normally closed	Ordering code	BCS0063	BCS005H	
	Part number	BCS M12T4D2-POM80G-S04G	BCS M12T4G1-POM80G-EP02	
NPN Normally open	Ordering code	BCS0064	BCS005J	
	Part number	BCS M12T4D2-NSM80G-S04G	BCS M12T4G1-NSM80G-EP02	
NPN Normally closed	Ordering code	BCS0065	BCS005K	
	Part number	BCS M12T4D2-NOM80G-S04G	BCS M12T4G1-NOM80G-EP02	
Supply voltage U_s	4...8 V DC	12...35 V DC	12...35 V DC	
Voltage drop U_a at I_a		≤ 0.8 V	≤ 0.8 V	
Rated insulation voltage U_i	75 V DC	75 V DC	75 V DC	
Output current max.		200 mA	200 mA	
No-load supply current I_0 max.		≤ 10 mA	≤ 10 mA	
Reverse polarity/short circuit protected		yes/yes	yes/yes	
Ambient temperature range T_a	0...+70 °C	-30...+70 °C	-30...+70 °C	
Switching frequency f		100 Hz	100 Hz	
Output function indicator		LED yellow	LED yellow	
Degree of protection per IEC 60529	IP 67	IP 65	IP 65	
Material	Housing	V2A	V2A	
	Sensing face	PTFE	PTFE	
	Cover	POM	POM	
Wiring	Triax sensor cable, see page 64	M12 connector, 4-pin, A-coded	2 m cable PUR, 3x0.14 mm ²	

For sensor amplifiers see
Accessories section
Page 57

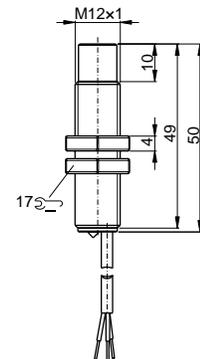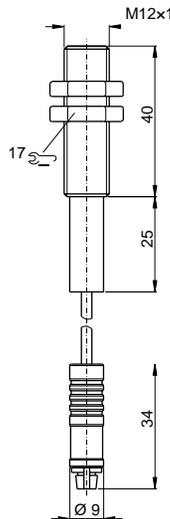

The non-flush mount sensors for level detection M12...M30 in plastic or PTFE housing provide IP 68 protection (at approx. 5 bar) at the sensing face. Sensors in stainless steel housing meet IP 67 at the sensing face.


Level Detection

DC 3-wire Tubular housings M12



M12x1	M12x1	M12x1	M12x1	M12x1
non-flush	non-flush	non-flush	non-flush	non-flush
1...8 mm	1...8 mm	1...8 mm	1...6 mm	1...6 mm
BCS005Y	BCS0059	BCS006Z	BCS006T	BCS009J
BCS M12VVD2-PSM80G-S04G	BCS M12VVG1-PSM80G-EP02	BCS M12TTG1-PSM80G-ET02	BCS M12VVI1-PSM60G-EP02-E	BCS M12TT11-PSM60G-ET02-E
BCS005Z	BCS005A	BCS0070	BCS006U	BCS009K
BCS M12VVD2-POM80G-S04G	BCS M12VVG1-POM80G-EP02	BCS M12TTG1-POM80G-ET02	BCS M12VVI1-POM60G-EP02-E	BCS M12TT11-POM60G-ET02-E
BCS0060	BCS005C	BCS0071	BCS006W	BCS009L
BCS M12VVD2-NSM80G-S04G	BCS M12VVG1-NSM80G-EP02	BCS M12TTG1-NSM80G-ET02	BCS M12VVI1-NSM60G-EP02-E	BCS M12TT11-NSM60G-ET02-E
BCS0061	BCS005E	BCS0072	BCS006Y	BCS009M
BCS M12VVD2-NOM80G-S04G	BCS M12VVG1-NOM80G-EP02	BCS M12TTG1-NOM80G-ET02	BCS M12VVI1-NOM60G-EP02-E	BCS M12TT11-NOM60G-ET02-E
12...35 V DC	12...35 V DC	12...35 V DC	13...35 V DC	12...35 V DC
≤ 0.8 V	≤ 0.8 V	≤ 0.8 V	≤ 0.8 V	≤ 0.8 V
75 V DC	75 V DC	75 V DC	75 V DC	75 V DC
200 mA	200 mA	200 mA	200 mA	200 mA
≤ 10 mA	≤ 10 mA	≤ 10 mA	≤ 15 mA	≤ 10 mA
yes/yes	yes/yes	yes/yes	yes/yes	yes/yes
-30...+60 °C	-30...+60 °C	-30...+70 °C	-30...+60 °C	-30...+60 °C
100 Hz	100 Hz	100 Hz	25 Hz	25 Hz
LED yellow	LED yellow	LED red	LED yellow	LED red
IP 65	IP 65	IP 65	IP 65	IP 65
PVC	PVC	PTFE	PVC	PTFE
PVC	PVC	PTFE	PVC	PTFE
PA	PVC	PTFE	PVC	PTFE
M12 connector, 4-pin, A-coded	2 m cable PUR, 3x0.14 mm ²	2 m cable PTFE, 3x0.2 mm ²	2 m cable PUR, 3x0.14 mm ²	2 m cable PTFE, 3x0.2 mm ²

DC 3-wire
Tubular housings
SMARTLEVEL technology
High temperature rateu styles
Leak sensor
A/D 2-wire
Tubular housings

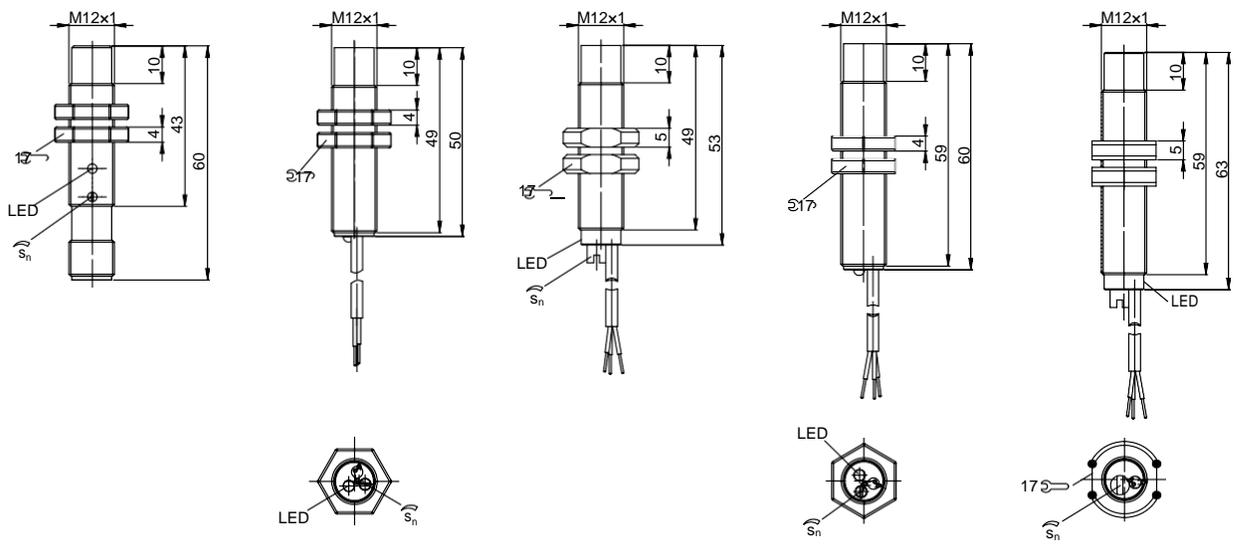

For power supplies, amplifiers, connectors and mounting brackets see accessories section starting page 55



Level Detection


DC 3-wire Tubular housings M18



Housing size		M18x1	M18x1	M18x1
Mounting		non-flush	non-flush	non-flush
Rated switching distance s_n		2...15 mm	2...15 mm	2...15 mm
PNP Normally open	Ordering code	BCS006A	BCS005R	BCS0066
	Part number	BCS M18T4G2-PSC15G-S04G	BCS M18T4I1-PSC15G-DV02	BCS M18VVG2-PSC15G-S04G
PNP Normally closed	Ordering code	BCS006C	BCS005T	BCS0067
	Part number	BCS M18T4G2-POC15G-S04G	BCS M18T4I1-POC15G-DV02	BCS M18VVG2-POC15G-S04G
NPN Normally open	Ordering code	BCS006E	BCS005U	BCS0068
	Part number	BCS M18T4G2-NSC15G-S04G	BCS M18T4I1-NSC15G-DV02	BCS M18VVG2-NSC15G-S04G
NPN Normally closed	Ordering code	BCS006F	BCS005W	BCS0069
	Part number	BCS M18T4G2-NOC15G-S04G	BCS M18T4I1-NOC15G-DV02	BCS M18VVG2-NOC15G-S04G
Supply voltage U_s		10...35 V DC	10...35 V DC	10...35 V DC
Voltage drop U_d at I_o		≤ 1.5 V	≤ 1.5 V	≤ 1.5 V
Rated insulation voltage U_i (protection class)		75 V DC	75 V DC	75 V DC
Output current max.		300 mA	300 mA	300 mA
No-load supply current I_o max.		≤ 10 mA	≤ 10 mA	≤ 10 mA
Reverse polarity/short circuit protected		yes/yes	yes/yes	yes/yes
Ambient temperature range T_a		-30...+70 °C	-30...+70 °C	-30...+60 °C
Switching frequency f		100 Hz	100 Hz	100 Hz
Output function indicator		LED yellow	LED yellow	LED yellow
Degree of protection per IEC 60529		IP 67	IP 67	IP 67
Material	Housing	V2A	V2A	PVC
	Sensing face	PTFE	PTFE	PVC
	Cover	PA	POM	PA
Wiring		M12 connector, 4-pin, A-coded	2 m cable PVC, 3x0.25 mm ²	M12 connector, 4-pin, A-coded



The non-flush mount sensors for level detection M12...M30 in plastic or PTFE housing provide IP 68 protection (at approx. 5 bar) at the sensing face. Sensors in stainless steel housing meet IP 67 at the sensing face.

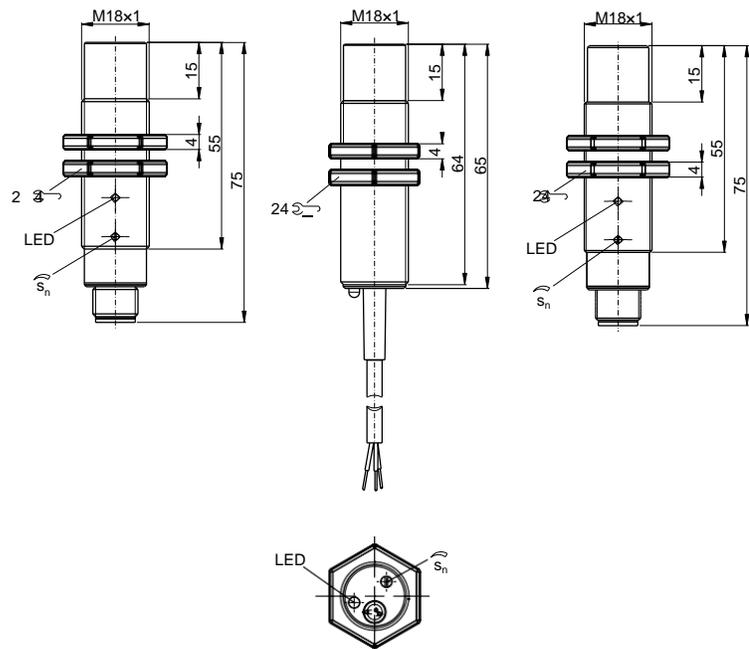

Level Detection


DC 3-wire Tubular housings M18




M18x1 non-flush 8 mm* BCS000H BCS M18KM3-PSC80G-S04G	M18x1 non-flush 2...15 mm BCS005L BCS M18VVI1-PSC15G-DV02	M18x1 non-flush 8 mm* BCS000E BCS M18KM3-PSC80G-BV02	M18x1 non-flush 2...15 mm BCS0073 BCS M18TTI2-PSC15G-AT02
BCS000C BCS M18KM3-POC80G-S04G-001	BCS005M BCS M18VVI1-POC15G-DV02	BCS000A BCS M18KM3-POC80G-BV02	BCS0074 BCS M18TTI2-POC15G-AT02
	BCS005N BCS M18VVI1-NSC15G-DV02	BCS0009 BCS M18KM3-NSC80G-BV02	BCS0075 BCS M18TTI2-NSC15G-AT02
	BCS005P BCS M18VVI1-NOC15G-DV02	BCS0008 BCS M18KM3-NOC80G-BV02	BCS0076 BCS M18TTI2-NOC15G-AT02
10...36 V DC ≤ 2.5 V 75 V DC 250 mA ≤ 15 mA yes/yes -25...+80 °C 50 Hz LED yellow IP 67 PBT PBT PBT	10...35 V DC ≤ 1.5 V 75 V DC 300 mA ≤ 10 mA yes/yes -30...+60 °C 100 Hz LED yellow IP 67 PVC PVC PBT	10...36 V DC ≤ 2.5 V 75 V DC 250 mA ≤ 15 mA yes/yes -25...+80 °C 50 Hz LED yellow IP 67 PBT PBT PBT	10...35 V DC ≤ 1.5 V 75 V DC 300 mA ≤ 10 mA yes/yes -30...+70 °C 100 Hz LED red IP 67 PTFE PTFE PTFE
M12 connector, 4-pin, A-coded	2 m cable PVC, 3x0.25 mm ²	2 m cable PVC, 3x0.34 mm	2 m cable PTFE, 3x0.2 mm ²







DC 3-wire
Tubular
housings
SMARTLEVEL
technology
High temperature
rated styles
Leak sensor
AC/DC
2-wire
Tubular
housings

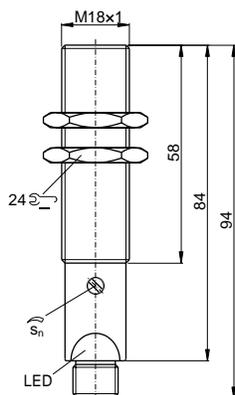

* Flush mounting
reduces the effective
switching distance by
50%.

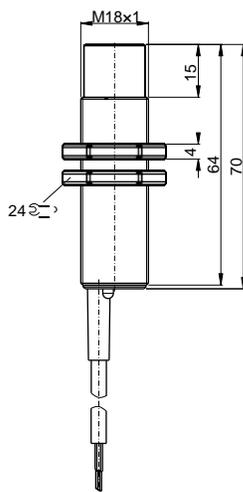

* Flush mounting
reduces the effective
switching distance by
50%.

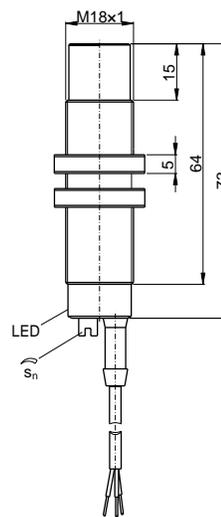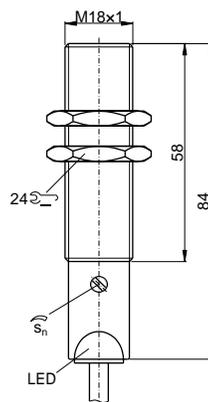

For power
supplies,
amplifiers,
connectors
and mounting
brackets see
accessories
section starting
page 55



Level Detection

DC 3-wire Tubular housings M30




Housing size		M30x1.5	M30x1.5	M30x1.5
Mounting		non-flush	non-flush	non-flush
Rated switching distance s_n		1...30 mm	2...30 mm	1...30 mm
PNP Normally open	Ordering code			
	Part number			
PNP Normally closed	Ordering code			
	Part number			
PNP NO/NC selectable	Ordering code	BCS007L	BCS007J	BCS007F
	Part number	BCS M30T4M2-PPC30G-S04G	BCS M30T4M3-PPC30G-EP02	BCS M30BBM2-PPC30G-S04G
NPN Normally open	Ordering code			
	Part number			
NPN Normally closed	Ordering code			
	Part number			
NPN NO/NC selectable	Ordering code	BCS007M	BCS007K	BCS007H
	Part number	BCS M30T4M2-NPC30G-S04G	BCS M30T4M3-NPC30G-EP02	BCSM30BBM2-NPC30G-S04G
Supply voltage U_s		10...35 V DC	10...35 V DC	10...35 V DC
Voltage drop U_a at I_a		≤ 1.8 V	≤ 1.8 V	≤ 1.8 V
Rated insulation voltage U_i (protection class)		75 V DC	75 V DC	75 V DC
Output current max.		300 mA	300 mA	300 mA
No-load supply current I_0 max.		≤ 15 mA	≤ 15 mA	≤ 15 mA
Reverse polarity/short circuit protected		yes/yes	yes/yes	yes/yes
Ambient temperature range T_a		$-30...+70$ °C	$-30...+70$ °C	$-30...+70$ °C
Switching frequency f		100 Hz	100 Hz	100 Hz
Power indicator		LED green	LED green	LED green
Output function indicator		LED yellow	LED yellow	LED yellow
Degree of protection per IEC 60529		IP 64	IP 64	IP 64
Material	Housing	V2A	V2A	PBT
	Sensing face	PTFE	PTFE	PBT
	Cover	PBT/PE	PBT/PE	PBT/PE
Wiring		M12 connector, 4-pin, A-coded	2 m cable PUR 3x0.34 mm ²	M12 connector, 4-pin, A-coded



For direct installation in containers

The non-flush mount sensors for level detection M12...M30 in plastic or PTFE housing provide IP 68 protection (at approx. 5 bar) at the sensing face. Sensors in stainless steel housing meet IP 67 at the sensing face.

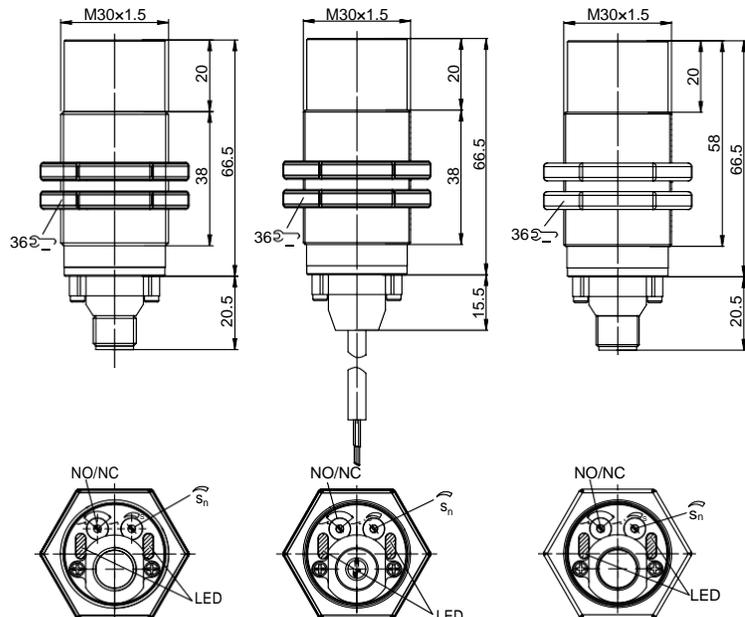

Level Detection

DC 3-wire Tubular housings
M30, Ø 34 mm




M30x1.5 non-flush 15 mm*	M30x1.5 non-flush 1...30 mm	M30x1.5 non-flush 15 mm*	M30x1.5 non-flush 2...30 mm	Ø 34 mm non-flush 20 mm
		BCS000R BCS M30KN2-PSC18G-AV02	BCS0077 BCS M30TTH2-PSC30G-AT02	BCS0005 BCS G34KN2-PSC24G-AV02
		BCS000P BCS M30KN2-POC15G-AV02	BCS0078 BCS M30TTH2-POC30G-AT02	BCS0004 BCS G34KN2-POC20G-AV02
BCS000L BCS M30KM7-PPH15G-S04U	BCS007C BCS M30BBM3-PPC30G-EP02			
		BCS000N BCS M30KN2-NSC18G-AV02	BCS0079 BCS M30TTH2-NSC30G-AT02	BCS0003 BCS G34KN2-NSC24G-AV02
		BCS000M BCS M30KN2-NOC15G-AV02	BCS007A BCS M30TTH2-NOC30G-AT02	BCS0002 BCS G34KN2-NOC20G-AV02
	BCS007E BCS M30BBM3-NPC30G-EP02			
10...36 V DC ≤ 2.5 V 250 V AC (I) 250 mA ≤ 16 mA yes/yes -25...+70 °C 40 Hz	10...35 V DC ≤ 1.8 V 75 V DC 300 mA ≤ 15 mA yes/yes -30...+70 °C 100 Hz LED green	10...36 V DC ≤ 2.5 V 250 V AC (I) 250 mA ≤ 15 mA yes/yes -25...+70 °C 40 Hz	10...35 V DC ≤ 1.8 V 75 V DC 300 mA ≤ 10 mA yes/yes -30...+70 °C 100 Hz	10...36 V DC ≤ 2.5 V 250 V AC (I) 250 mA ≤ 13 mA yes/yes -25...+70 °C 40 Hz
LED yellow IP 65 PBT PBT PC M12 connector, 4-pin, A-coded	LED yellow IP 64 PBT PBT PBT/PE 2 m cable PUR 3x0.34 mm ²	LED yellow IP 65 PBT PBT PBT 2 m cable PVC, 3x0.5 mm	LED red IP 67 PTFE PTFE PTFE 2 m cable PTFE, 3x0.2 mm ²	LED yellow IP 65 PBT PBT PBT 2 m cable PVC, 3x0.5 mm



DC 3-wire
Tubular
housings
SMARTLEVEL
technology
High temperature
rated styles
Leak sensor

AC/DC
2-wire
Tubular
housings

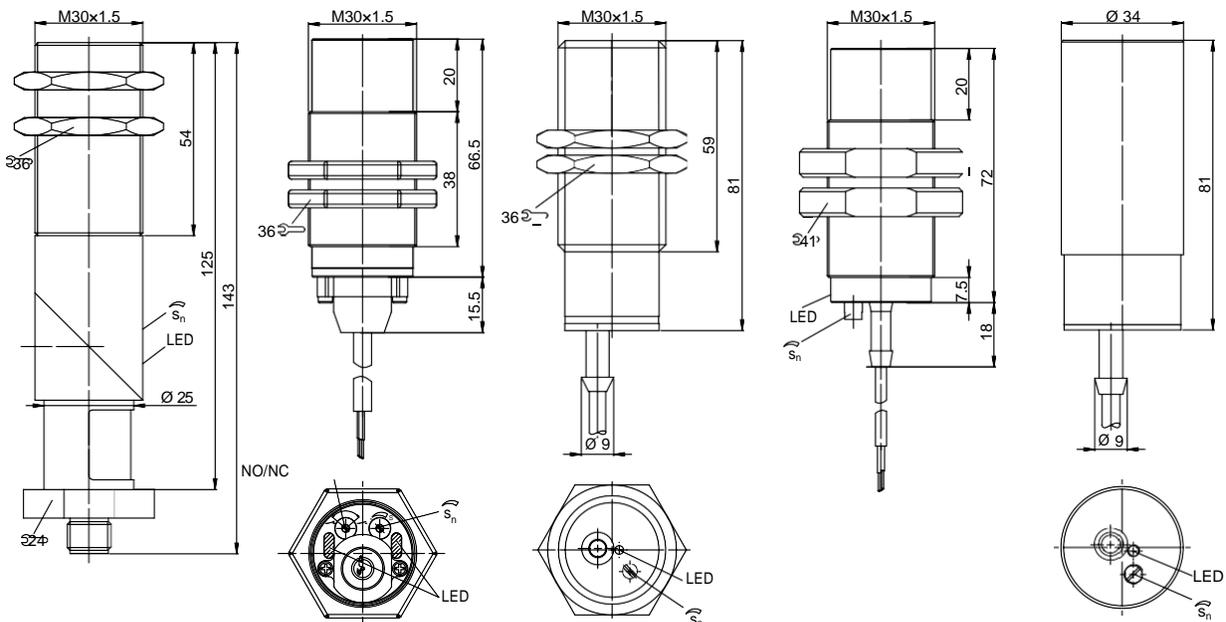

For power
supplies,
amplifiers,
connectors
and mounting
brackets see
accessories
section starting
page 55








Level Detection

DC 3-wire Tubular housings
Micro-Level M12, G 1/4", NPT 1/4"



Housing size	M12x1 Micro-Level	G 1/4" Micro-Level	NPT 1/4" Micro-Level
Mounting	non-flush	non-flush	non-flush
Rated switching distance s_n	Level adjustable	Level adjustable	Level adjustable
PNP/NPN and NO/NC selectable	Ordering code Part number	Ordering code Part number	Ordering code Part number
Supply voltage U_s	10...35 V DC	10...35 V DC	10...35 V DC
Voltage drop U_a at I_o	≤ 3 V	≤ 3 V	≤ 3 V
Rated insulation voltage U_i	75 V DC	75 V DC	75 V DC
Output current max.	50 mA	50 mA	50 mA
No-load supply current I_o max.	≤ 20 mA	≤ 20 mA	≤ 20 mA
Reverse polarity/short circuit protected	no/yes	no/yes	no/yes
Ambient temperature range T_a	-10...+70 °C	-10...+70 °C	-10...+70 °C
Switching frequency f	5 Hz	5 Hz	5 Hz
Power indicator	LED green	LED green	LED green
Output function indicator	LED yellow	LED yellow	LED yellow
Degree of protection per IEC 60529	IP 68 at max. 10 bar/ IP 69K	IP 68 at max. 10 bar/ IP 69K	IP 68 at max. 10 bar/ IP 69K
Material	Housing	PSU	PSU
	Sensing face	PSU	PSU
	Cover	PSU	PSU
Wiring	M8 connector, 3-pin	M8 connector, 3-pin	M8 connector, 3-pin

Shield (M18 or 1/2") for
Micro-Level sensors
see Accessories section
Page 87



Standard mounting uses through-holes with included nut. This can be ignored when threaded holes are used or serve as additional security. Sealing is accomplished using an O-ring or gasket.

Reverse mounting in a tube of any desired length for fashioning "point-switching" rod sensors. Here, sealing can also be accomplished using an O-ring or a gasket.

Level Detection

DC 3-wire Tubular housings
Micro-Level M12, G 1/4", NPT 1/4"








M12x1 Micro-Level non-flush Level adjustable BCS009N BCS S40SS01-GPCFNG-EP02	G 1/4" Micro-Level non-flush Level adjustable BCS009P BCS S40SS02-GPCFNG-EP02	NPT 1/4" Micro-Level non-flush Level adjustable BCS009R BCS S40SS03-GPCFNG-EP02	M12x1 Micro-Level non-flush Level adjustable BCS009Y BCS S42SS01-GPCFNG-S49G	G 1/4" Micro-Level non-flush Level adjustable BCS009Z BCS S42SS02-GPCFNG-S49G
10...35 V DC	10...35 V DC	10...35 V DC	10...35 V DC	10...35 V DC
≤ 3 V	≤ 3 V	≤ 3 V	≤ 3 V	≤ 3 V
75 V DC	75 V DC	75 V DC	75 V DC	75 V DC
50 mA	50 mA	50 mA	50 mA	50 mA
≤ 20 mA	≤ 20 mA	≤ 20 mA	≤ 20 mA	≤ 20 mA
no/yes	no/yes	no/yes	no/yes	no/yes
-10...+70 °C	-10...+70 °C	-10...+70 °C	-10...+70 °C	-10...+70 °C
5 Hz	5 Hz	5 Hz	5 Hz	5 Hz
LED green	LED green	LED green	LED green	LED green
LED yellow	LED yellow	LED yellow	LED yellow	LED yellow
IP 68 at max. 10 bar/ IP 69K	IP 68 at max. 10 bar/ IP 69K	IP 68 at max. 10 bar/ IP 69K	IP 68 at max. 10 bar/ IP 69K	IP 68 at max. 10 bar/ IP 69K
PSU	PSU	PSU	PSU	PSU
PSU	PSU	PSU	PSU	PSU
PSU	PSU	PSU	PSU	PSU
2 m cable PUR, 3x0.34 mm ²	2 m cable PUR, 3x0.34 mm ²	2 m cable PUR, 3x0.34 mm ²	M8 connector, 3-pin	M8 connector, 3-pin



DC 3-wire
Tubular
housings
SMARTLEVEL
technology
High temperature
rated styles
Leak sensor

AC/DC
2-wire
Tubular
housings

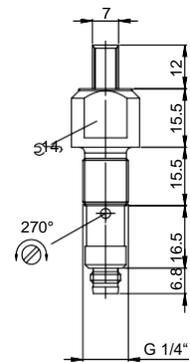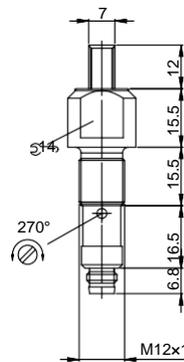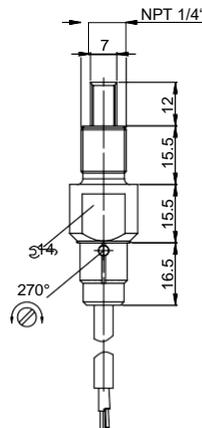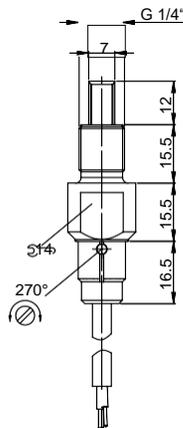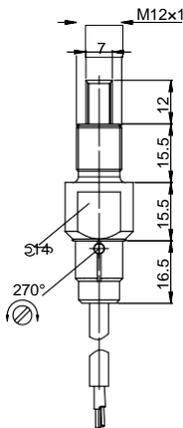

For power
supplies,
amplifiers,
connectors
and mounting
brackets see
accessories
section starting
page 55




Level Detection

DC 3-wire Tubular housings
Micro-Level NPT 1/4"
M18





Pressure rated to 10 bar

Housing size		NPT 1/4" Micro-Level	M18x1
Mounting		non-flush	non-flush
Rated switching distance s_n		Level adjustable	Level adjustable
PNP Normally open	Ordering code		BCS006H
	Part number		BCS S01T401-PSCFNG-KM16-T02
PNP Normally closed	Ordering code		BCS006J
	Part number		BCS S01T401-POCFNG-KM16-T02
NPN Normally open	Ordering code		BCS006K
	Part number		BCS S01T401-NSCFNG-KM16-T02
NPN Normally closed	Ordering code		BCS006L
	Part number		BCS S01T401-NOCFNG-KM16-T02
PNP/NPN and NO/NC selectable	Ordering code	BCS00A0	
	Part number	BCS S42SS03-GPCFNG-S49G	
Supply voltage U_s		10...35 V DC	10...35 V DC
Voltage drop U_a at I_a		≤ 3 V	≤ 2.7 V
Rated insulation voltage U_i		75 V DC	75 V DC
Output current max.		50 mA	100 mA
No-load supply current I_0 max.		≤ 20 mA	≤ 10 mA
Reverse polarity/short circuit protected		no/yes	yes/yes
Ambient temperature range T_a		-10...+70 °C	-30...+125 °C
Switching frequency f		5 Hz	5 Hz
Power indicator		LED green	
Output function indicator		LED yellow	LED yellow
Degree of protection per IEC 60529		IP 68 at max. 10 bar/ IP 69K	IP 67 (Sensing face: IP 68 at max. 10 bar)
Material	Housing	PSU	Die-case aluminum (GD-Al)
	Sensing face	PSU	PTFE
	Cover	PSU	Die-case aluminum (GD-Al)
Wiring		M8 connector, 3-pin	Screw terminals



Adjustment

Adjustment is made using the trimming potentiometer. The objective is to set a middle value between the turn-on and turn-off point when the sensor is damped. In individual cases when temperature swings are great and very sticky media are used, a slight readjustment may be necessary. Otherwise our adjustment instructions for non-flush mount sensor versions apply.

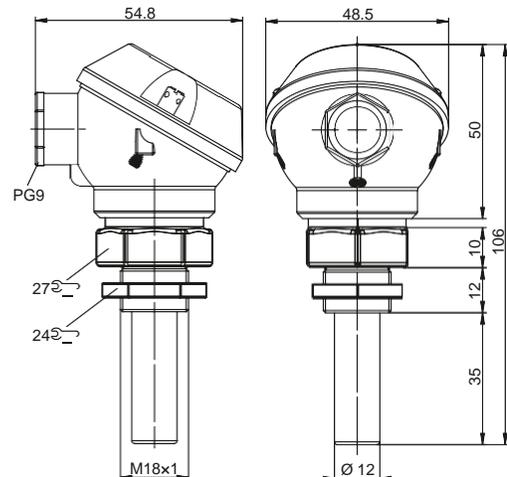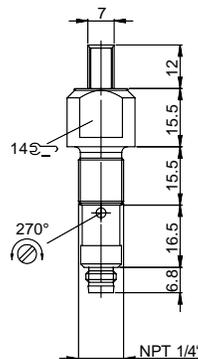

O-ring not included

Level Detection

DC 3-wire Tubular housings

R 3/8", NPTF 3/8"



Pressure rated to 10 bar




Pressure rated to 10 bar



DC 3-wire
Tubular
housings
SMARTLEVEL
technology
High temperature
rated styles
Leak sensor
AC/DC
2-wire
Tubular
housings

R 3/8"	NPTF 3/8"
non-flush	non-flush
Level adjustable	Level adjustable
BCS006M	BCS00A6
BCS S02T401-PSCFNG-KM16-T02	BCS S03T401-PSCFNH-KM16-T02
BCS006N	BCS00A7
BCS S02T401-POCFNG-KM16-T02	BCS S03T401-POCFNH-KM16-T02
BCS006P	BCS00A8
BCS S02T401-NSCFNG-KM16-T02	BCS S03T401-NSCFNH-KM16-T02
BCS006R	BCS00A9
BCS S02T401-NOCFNG-KM16-T02	BCS S03T401-NOCFNH-KM16-T02
10...35 V DC	10...35 V DC
≤ 2.7 V	≤ 2.7 V
75 V DC	75 V DC
100 mA	100 mA
≤ 10 mA	≤ 10 mA
yes/yes	yes/yes
-30...+125 °C	-30...+125 °C
5 Hz	5 Hz
LED yellow	LED yellow
IP 67	IP 67
(Sensing face: IP 68 at max. 10 bar)	(Sensing face: IP 68 at max. 10 bar)
Die-case aluminum (GD-Al)	Die-case aluminum (GD-Al)
PTFE	PTFE
Die-case aluminum (GD-Al)	Die-case aluminum (GD-Al)
Screw terminals	Screw terminals

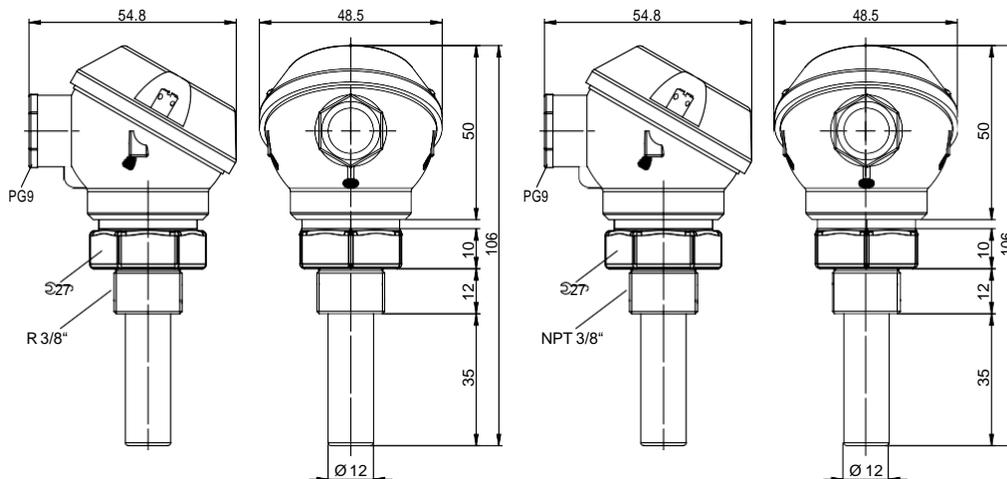

For power
supplies,
amplifiers,
connectors
and mounting
brackets see
accessories
section starting
page 55





SMARTLEVEL sensors set new standards

Simply describing **SMARTLEVEL** as a level sensor for reliable sensing of liquid, conductive media does not do it justice.

SMARTLEVEL sensors can solve applications that were previously tricky or even impossible.

SMARTLEVEL

- Compensate for moisture, foam and build-up
- Penetrate glass or plastic walls up to 12 mm thick
- Detect aqueous to highly conductive media
- Feature chemically resistant housings made of PTFE

SMARTLEVEL sensors reduce cost

- Adjustment-free installation
- Freedom from cleaning in most applications
- Reduced use of materials
- Less construction outlay (e.g. no bypass tubes)

SMARTLEVEL sensors optimize production processes and increase application reliability.

Standard applications with liquid, conductive media

SMARTLEVEL sensors are factory adjusted for standard applications and can reliably detect liquid, conductive media through glass or plastic walls. The factory setting automatically hides glass and plastic walls (approx. 0.5...6 mm) and compensates for internal or external foam, moisture, and contamination.

Special applications

SMARTLEVEL sensors can also be used with liquid, conductive media in otherwise tricky or even impossible applications such as seeing through glass and plastic walls even greater than 6 mm thick.



Note on cable routing

The connection cable should not be coiled behind the sensor. Instead, shorten the cable if needed or route it loosely. (see diagrams above)

SMARTLEVEL takes off – in the Airbus A380

Airbus is equipping the rest rooms in their 4-engine large-body A380 with a mixer tap. The heart of this exclusive system in the elegant Airbus design are compact **SMARTLEVEL** capacitive sensors from Balluff. These enable passengers to conveniently select the desired water temperature with the assistance of an LED indicator. The show-stopper: sensing errors are impossible, since **SMARTLEVEL** sensors ignore clinging dirt, liquid films and soap foam. Only hand-touching the faucet results in a switching operating, even if a wet paper towel covers it.



Level Detection

DC 3-wire SMARTLEVEL technology
M18




Housing size		M18x1	M18x1	M18x1
Mounting		non-flush	non-flush	non-flush
Rated switching distance s_n		Self-adjusting	Self-adjusting	Self-adjusting
PNP	Normally open	Ordering code BCS008T	Ordering code BCS007N	Ordering code BCS008A
		Part number BCS M18VVN-PSCFAG-S49G	Part number BCS M18VVI1-PSCFAG-DV02	Part number BCS M18TTI2-PSCFAG-AT02
PNP	Normally closed	Ordering code BCS008U	Ordering code BCS007P	Ordering code BCS008C
		Part number BCS M18VVN-POCFAG-S49G	Part number BCS M18VVI1-POCFAG-DV02	Part number BCS M18TTI2-POCFAG-AT02
NPN	Normally open	Ordering code BCS008W	Ordering code BCS007R	Ordering code BCS008E
		Part number BCS M18VVN-NSCFAG-S49G	Part number BCS M18VVI1-NSCFAG-DV02	Part number BCS M18TTI2-NSCFAG-AT02
NPN	Normally closed	Ordering code BCS008Y	Ordering code BCS007T	Ordering code BCS008F
		Part number BCS M18VVN-NOCFAG-S49G	Part number BCS M18VVI1-NOCFAG-DV02	Part number BCS M18TTI2-NOCFAG-AT02

Voltage drop U_d at I_o	≤ 1.8 V	≤ 1.8 V	≤ 1.8 V
Rated insulation voltage U_i	75 V DC	75 V DC	75 V DC
Output current max.	300 mA	300 mA	300 mA
No-load supply current I_o max.	≤ 20 mA	≤ 20 mA	≤ 20 mA
Reverse polarity/short circuit protected	yes/yes	yes/yes	yes/yes
Ambient temperature range T_a	-10...+60 °C	-10...+60 °C	-10...+60 °C
Switching frequency f	2 Hz	2 Hz	2 Hz
Output function indicator	LED yellow	LED yellow	LED red
Degree of protection per IEC 60529	IP 64	IP 64	IP 64
Material	Housing	PVC	PVC
	Sensing face	PVC	PVC
	Cover	PVC	PBT
Wiring		M8 connector, 3-pin	2 m cable PVC, 3x0.25 mm ²
			2 m cable PTFE, 3x0.2 mm ²



For direct installation in containers

The non-flush mount sensors for level detection M12...M30 in plastic or PTFE housing provide IP 68 protection (at approx. 5 bar) at the sensing face. Sensors in stainless steel housing meet IP 67 at the sensing face.

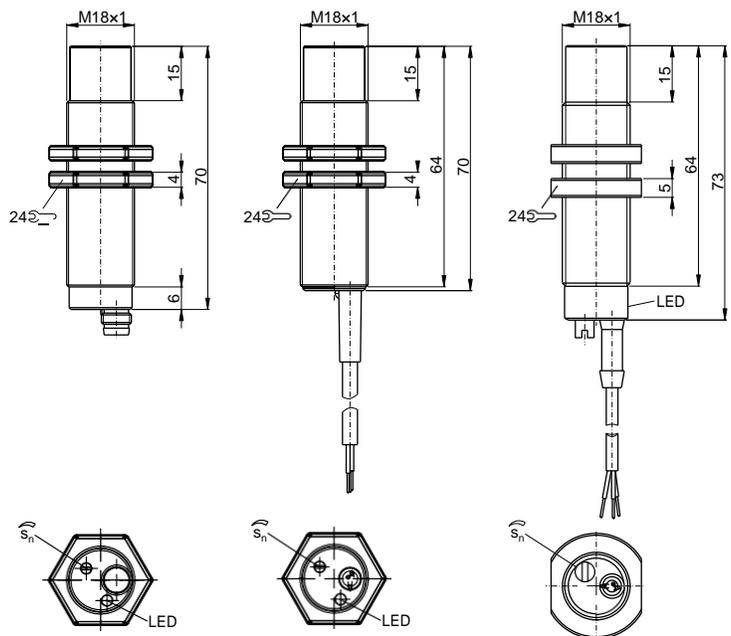

For power supplies, amplifiers, connectors and mounting brackets see accessories section starting page 55



Level Detection

DC 3-wire **SMARTLEVEL** technology
M30

SMARTLEVEL



SMARTLEVEL 15



SMARTLEVEL 15




SMARTLEVEL 15

Housing size		M30x1.5	M30x1.5	M30x1.5	
Mounting		non-flush	non-flush	non-flush	
Rated switching distance s_n		Self-adjusting	Self-adjusting	Self-adjusting	
PNP Normally open	Ordering code			BCS0086	
	Part number			BCS M30TTH2-PSCFAG-AT02	
PNP Normally closed	Ordering code			BCS0087	
	Part number			BCS M30TTH2-POCFAG-AT02	
PNP NO/NC selectable	Ordering code	BCS007Y	BCS007U		
	Part number	BCS M30BBM2-PPCFAG-S04G	BCS M30BBM3-PPCFAG-EP02		
NPN Normally open	Ordering code			BCS0088	
	Part number			BCS M30TTH2-NSCFAG-AT02	
NPN Normally closed	Ordering code			BCS0089	
	Part number			BCS M30TTH2-NOCFAG-AT02	
NPN NO/NC selectable	Ordering code	BCS007Z	BCS007W		
	Part number	BCS M30BBM2-NPCFAG-S04G	BCS M30BBM3-NPCFAG-EP02		
PNP/NPN and NO/NC selectable	Ordering code				
	Part number				
Supply voltage U_s		10...35 V DC	10...35 V DC	10...35 V DC	
Voltage drop U_a at I_a		≤ 1.8 V	≤ 1.8 V	≤ 1.8 V	
Rated insulation voltage U_i		75 V DC	75 V DC	75 V DC	
Output current max.		300 mA	300 mA	300 mA	
No-load supply current I_0 max.		≤ 20 mA	≤ 20 mA	≤ 20 mA	
Reverse polarity/short circuit protected		yes/yes	yes/yes	yes/yes	
Ambient temperature range T_a		-10...+60 °C	-10...+60 °C	-10...+60 °C	
Switching frequency f		2 Hz	2 Hz	2 Hz	
Power indicator		LED green	LED green		
Output function indicator		LED yellow	LED yellow	LED red	
Degree of protection per IEC 60529		IP 64	IP 64	IP 64	
Material	Housing	PBT	PBT	PTFE	
	Sensing face	PBT	PBT	PTFE	
	Cover	PBT/PE	PBT/PE	PTFE	
Wiring		M12 connector, 4-pin, A-coded	2 m cable PUR, 3x0.34 mm ²	2 m cable PTFE, 3x0.2 mm ²	



For direct installation in containers

The non-flush mount sensors for level detection M12...M30 and $\varnothing 7 \times 52$ mm in plastic or PTFE housing provide IP 68 protection (at approx. 5 bar) at the sensing face. Sensors in stainless steel housing meet IP 67 at the sensing face.

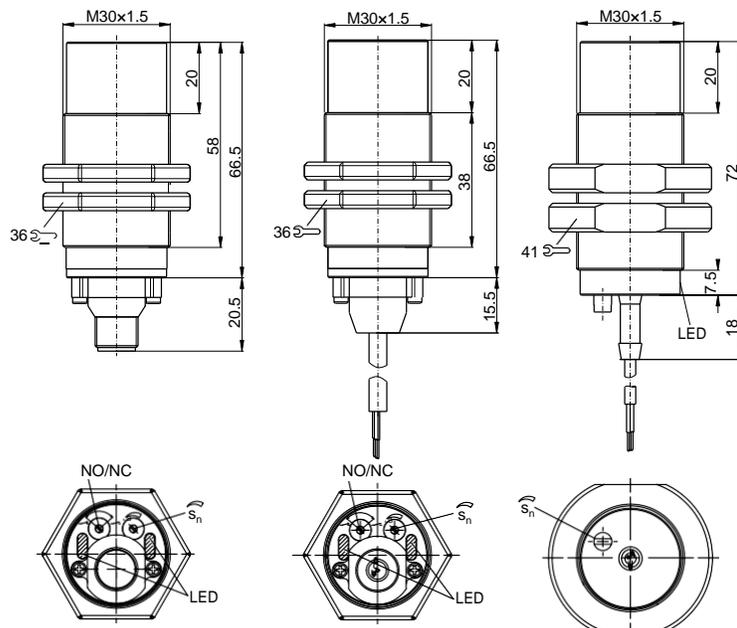

Level Detection

DC 3-wire **SMARTLEVEL** technology
 Ø 7 mm, Micro-Level M12, G 1/4", NPT 1/4"



SMARTLEVEL 15



SMARTLEVEL 15



SMARTLEVEL 15



SMARTLEVEL 15








SMARTLEVEL 15

Ø 7x52 mm non-flush Self-adjusting BCS009C BCS S20TT01-PSLFAG-ET02 BCS009E BCS S20TT01-POLFAG-ET02	M12x1 Micro-Level non-flush Self-adjusting BCS009F BCS S20TT01-NSLFAG-ET02 BCS009H BCS S20TT01-NOLFAG-ET02	G 1/4" Micro-Level non-flush Self-adjusting BCS0095 BCS S41SS01-GPCFAG-S49G	NPT 1/4" Micro-Level non-flush Self-adjusting BCS0096 BCS S41SS02-GPCFAG-S49G	M12x1 Micro-Level non-flush Self-adjusting BCS0097 BCS S41SS03-GPCFAG-S49G	M12x1 Micro-Level non-flush Self-adjusting BCS008Z BCS S40SS01-GPCFAG-EP02
10...30 V DC	10...35 V DC	10...35 V DC	10...35 V DC	10...35 V DC	10...35 V DC
≤ 1.5 V	≤ 3 V	≤ 3 V	≤ 3 V	≤ 3 V	≤ 3 V
75 V DC	75 V DC	75 V DC	75 V DC	75 V DC	75 V DC
50 mA	50 mA	50 mA	50 mA	50 mA	50 mA
≤ 20 mA	≤ 20 mA	≤ 20 mA	≤ 20 mA	≤ 20 mA	≤ 20 mA
no/no	no/yes	no/yes	no/yes	no/yes	no/yes
+5...+100 °C	-10...+105 °C	-10...+105 °C	-10...+105 °C	-10...+105 °C	-10...+105 °C
10 Hz	5 Hz	5 Hz	5 Hz	5 Hz	5 Hz
	LED green	LED green	LED green	LED green	LED green
	LED yellow	LED yellow	LED yellow	LED yellow	LED yellow
IP 66	IP 68 at max. 10 bar/ IP 69K	IP 68 at max. 10 bar/ IP 69K	IP 68 at max. 10 bar/ IP 69K	IP 68 at max. 10 bar/ IP 69K	IP 68 at max. 10 bar/ IP 69K
PTFE	PSU	PSU	PSU	PSU	PSU
PTFE	PSU	PSU	PSU	PSU	PSU
PTFE	PSU	PSU	PSU	PSU	PSU
2 m cable PTFE, 3x0.2 mm ²	M8 connector, 3-pin	M8 connector, 3-pin	M8 connector, 3-pin	M8 connector, 3-pin	2 m cable PUR, 3x0.34 mm ²



DC 3-wire
 Tubular housings
SMARTLEVEL-technology
 High temperature rated styles
 Leak sensor

AC/DC 2-wire
 Tubular housings

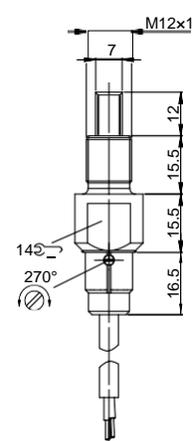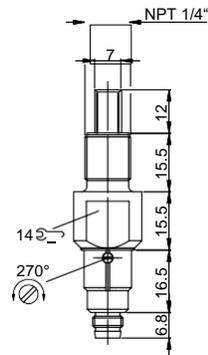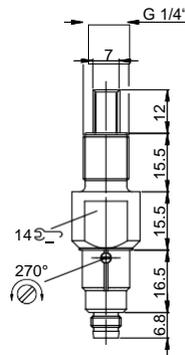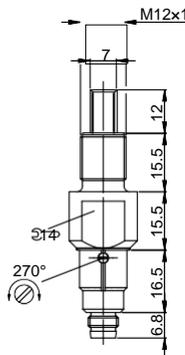

Shield (M18 or 1/2") for Micro-Level sensors see Accessories section Page 86



For power supplies, amplifiers, connectors and mounting brackets see accessories section starting page 55



Level Detection





DC 3-wire **SMARTLEVEL** technology
Micro-Level, NPT 1/4", M12

SMARTLEVEL



Housing size		G 1/4" Micro-Level	NPT 1/4" Micro-Level	M12x1 Micro-Level
Mounting		non-flush	non-flush	non-flush
Rated switching distance s_n		Self-adjusting	Self-adjusting	Self-adjusting
PNP/NPN and NO/NC selectable	Ordering code	BCS0090	BCS0091	BCS0092*
	Part number	BCS S40SS02-GPCFAG-EP02	BCS S40SS03-GPCFAG-EP02	BCS S40SS01-GPCFAG-EP02-D01
Supply voltage U_s		10...35 V DC	10...35 V DC	10...35 V DC
Voltage drop U_a at I_a		≤ 3 V	≤ 3 V	≤ 3 V
Rated insulation voltage U_i		75 V DC	75 V DC	75 V DC
Output current max.		50 mA	50 mA	50 mA
No-load supply current I_0 max.		≤ 20 mA	≤ 20 mA	≤ 20 mA
Reverse polarity/short circuit protected		no/yes	no/yes	no/yes
Ambient temperature range T_a		-10...+105 °C	-10...+105 °C	-10...+105 °C
Switching frequency f		5 Hz	5 Hz	100 Hz
Power indicator		LED green	LED green	LED green
Output function indicator		LED yellow	LED yellow	LED yellow
Degree of protection per IEC 60529		IP 68 at max. 10 bar/ IP 69K	IP 68 at max. 10 bar/ IP 69K	IP 68 at max. 10 bar/ IP 69K
Material	Housing	PSU	PSU	PSU
	Sensing face	PSU	PSU	PSU
	Cover	PSU	PSU	PSU
Wiring		2 m cable PUR, 3x0.34 mm ²	2 m cable PUR, 3x0.34 mm ²	2 m cable PUR, 3x0.34 mm ²

Shield (M18 or 1/2") for
Micro-Level sensors
see Accessories section
Page 86

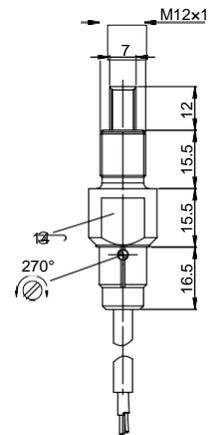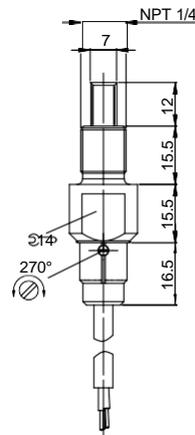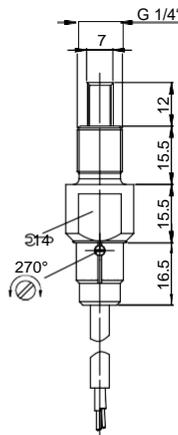

Standard mounting uses through-holes with included nut. This can be ignored when threaded holes are used or serve as additional security. Sealing is accomplished using an O-ring or gasket.

Reverse mounting in a tube of any desired length for fashioning "point-switching" rod sensors. Here, sealing can also be accomplished using an O-ring or a gasket.

Level Detection






DC 3-wire **SMARTLEVEL** technology
Micro-Level, NPT 1/4", M12



SMARTLEVEL 15	SMARTLEVEL 15	SMARTLEVEL 15	SMARTLEVEL 15	SMARTLEVEL 15
G 1/4" Micro-Level	NPT 1/4" Micro-Level	M12x1 Micro-Level	G 1/4" Micro-Level	NPT 1/4" Micro-Level
non-flush	non-flush	non-flush	non-flush	non-flush
Self-adjusting	Self-adjusting	Self-adjusting	Self-adjusting	Self-adjusting
BCS0093*	BCS0094*	BCS0098	BCS0099	BCS009A
BCS S40SS02-GPCFAG-EP02-D01	BCS S40SS03-GPCFAG-EP02-D01	BCS S42SS01-GPCFAG-S49G	BCS S42SS02-GPCFAG-S49G	BCS S42SS03-GPCFAG-S49G
10...35 V DC	10...35 V DC	10...35 V DC	10...35 V DC	10...35 V DC
≤ 3 V	≤ 3 V	≤ 3 V	≤ 3 V	≤ 3 V
75 V DC	75 V DC	75 V DC	75 V DC	75 V DC
50/50 mA push-pull	50/50 mA push-pull	50 mA	50 mA	50 mA
≤ 20 mA	≤ 20 mA	≤ 20 mA	≤ 20 mA	≤ 20 mA
no/yes	no/yes	no/yes	no/yes	no/yes
-10...+105 °C	-10...+105 °C	-10...+105 °C	-10...+105 °C	-10...+105 °C
100 Hz	100 Hz	5 Hz	5 Hz	5 Hz
LED green	LED green	LED green	LED green	LED green
LED yellow	LED yellow	LED yellow	LED yellow	LED yellow
IP 68 at max. 10 bar/ IP 69K	IP 68 at max. 10 bar/ IP 69K	IP 68 at max. 10 bar/ IP 69K	IP 68 at max. 10 bar/ IP 69K	IP 68 at max. 10 bar/ IP 69K
PSU	PSU	PSU	PSU	PSU
PSU	PSU	PSU	PSU	PSU
PSU	PSU	PSU	PSU	PSU
2 m cable PUR, 3x0.34 mm ²	2 m cable PUR, 3x0.34 mm ²	M8 connector, 3-pin	M8 connector, 3-pin	M8 connector, 3-pin




DC 3-wire
Tubular housings
SMART-technology
High temperature rated styles
Leak sensor
AC/DC 2-wire
Tubular housings

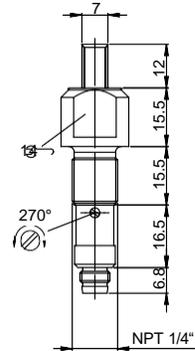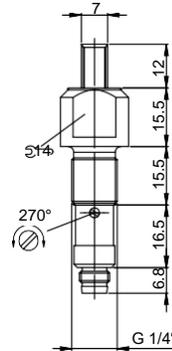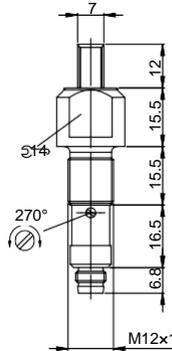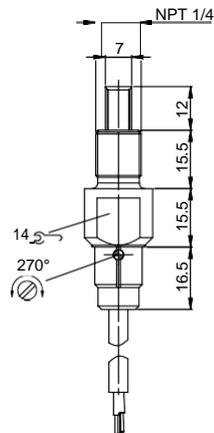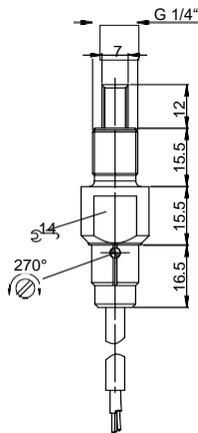

For power supplies, amplifiers, connectors and mounting brackets see accessories section starting page 55

* **i** The continuous self-test signal (CST) is superimposed on the output signal.

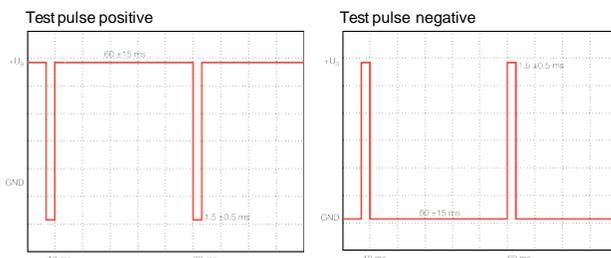




Level Detection

DC 3-wire **SMARTLEVEL** technology
 Ø 50 mm

SMARTLEVEL



		SMARTLEVEL 15	SMARTLEVEL 15	SMARTLEVEL 50
Housing size		Ø 50x10 mm	Ø 50x10 mm	Ø 50x10 mm
Mounting		flush	flush	flush
Rated switching distance s_n		Self-adjusting	Self-adjusting	Self-adjusting
PNP Normally open	Ordering code		BCS0080	BCS00CK
	Part number		BCS D50TT05-PSCFAC-ET02	BCS D50O006-PSFSC-EV02
PNP Normally closed	Ordering code		BCS0081	BCS00CM
	Part number		BCS D50TT05-POCFAC-ET02	BCS D50O006-POFSC-EV02
PNP NO/NC selectable	Ordering code	BCS0084		
	Part number	BCS D50O004-PPCFAC-EV02		
NPN Normally open	Ordering code		BCS0082	BCS00HE
	Part number		BCS D50TT05-NSCFAC-ET02	BCS D50O006-NSFSC-EV02
NPN Normally closed	Ordering code		BCS0083	BCS00C1
	Part number		BCS D50TT05-NOCFAC-ET02	BCS D50O006-NOFSC-EV02
NPN NO/NC selectable	Ordering code	BCS0085		
	Part number	BCS D50O004-NPCFAC-EV02		
PNP/NPN and NO/NC selectable				
Supply voltage U_s		10...35 V DC	10...35 V DC	10...35 V DC
Voltage drop U_a at I_a		≤ 1.8 V	≤ 1.8 V	≤ 1.8 V
Rated insulation voltage U_i		75 V DC	75 V DC	75 V DC
Output current max.		300 mA	300 mA	300 mA
No-load supply current I_o max.		≤ 20 mA	≤ 20 mA	≤ 10 mA
Reverse polarity/short circuit protected		yes/yes	yes/yes	yes/yes
Ambient temperature range T_a		-10...+60 °C	-10...+60 °C	-10...+60 °C
Switching frequency f		2 Hz	2 Hz	2 Hz
Power indicator				
Output function indicator		LED yellow	LED red	LED yellow
Degree of protection per IEC 60529		IP 67	IP 67	IP 67
Material	Housing	POM	PTFE	POM
	Sensing face	POM	PTFE	POM
	Cover	POM	PTFE	POM
Wiring		2 m cable PVC, 3x0.25 mm ²	2 m cable PTFE, 3x0.2 mm ²	2 m cable PVC, 3x0.25 mm ²



Level Detection

DC 3-wire **SMARTLEVEL** technology
 Micro-Box 16x34x8 mm
 M30



SMARTLEVEL 15



SMARTLEVEL 15



SMARTLEVEL 500+

Consult factory for availability




16x34x8 mm Micro-Box flush	16x34x8 mm Micro-Box flush	M30x1.5 non-flush		
Self-adjusting	Self-adjusting	Self-adjusting		
BCS008M	BCS008H			
BCS R08RR01-PSMFAC-EP00,2-GS49	BCS R08RR01-PSMFAC-EP02			
BCS008N	BCS008J			
BCS R08RR01-POMFAC-EP00,2-GS49	BCS R08RR01-POMFAC-EP02			
BCS008P	BCS008K			
BCS R08RR01-NSMFAC-EP00,2-GS49	BCS R08RR01-NSMFAC-EP02			
BCS008R	BCS008L			
BCS R08RR01-NOMFAC-EP00,2-GS49	BCS R08RR01-NOMFAC-EP02			
		BCS00HJ		
		BCS M30T4M3-GPCFVG-EP02		
12...30 V DC	12...30 V DC	10...30 V DC		
≤ 1.5 V	≤ 1.5 V	≤ 3 V		
75 V DC	75 V DC	75 V DC		
50 mA	50 mA	100 mA		
≤ 10 mA	≤ 10 mA	≤ 15 mA		
yes/yes	yes/yes	no/yes		
-30...+70 °C	-30...+70 °C	-10...+60 °C		
2 Hz	2 Hz	2 Hz		
		LED green		
LED yellow	LED yellow	LED yellow		
IP 67	IP 67	IP 67		
PP	PP	V2A		
PP	PP	PTFE		
PP	PP	PBT/PE		
0.2 m cable PUR, 3x0.14 mm ² with M8 connector, 3-pin	2 m cable PUR, 3x0.14 mm ²	2 m cable PUR, 3x0.34 mm ²		


DC 3-wire
 Tubular housings
SMARTLEVEL-technology
 High temperature rated styles
 Leak sensor

AC/DC 2-wire
 Tubular housings


For power supplies, amplifiers, connectors and mounting brackets see accessories section starting **page 55**

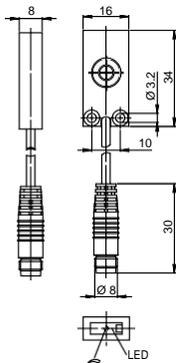

Mounting frame included

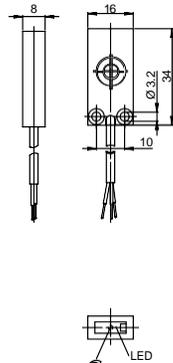

Mounting frame included

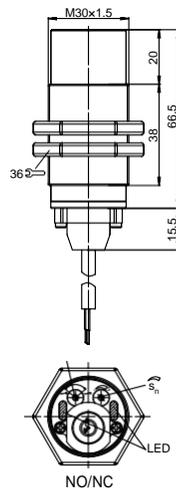

NO/NC



Level Detection

DC 3-wire High-temperature rated

+250 °C
+482 °F

Balluff high-temperature sensors can be used for level detection of liquid, paste-like or powdery media at high temperatures up to 250 °C.

To withstand such extreme conditions, the housing of the high-temperature rated sensors is made of stainless steel and the sensor heads of PTFE. The sensors are also used with a special triax shielded sensor cable and a separate amplifier.




Housing size	
Mounting	
Rated switching distance s_n	
With sensor amplifier	Ordering code
	Part number
Supply voltage U_s	
Ambient temperature range T_a	
Degree of protection per IEC 60529	
Material	Housing
	Sensing face
	Cover
Wiring	

For sensor amplifiers
see Accessories section
Page 57



Description	Connectors for high-temperature sensors
Ordering code	BCC04JW
Part number	BCC Z003-020
Ambient temperature range T_a	-10...+70° C
Degree of protection per IEC 60529	IP 54
Wiring	2 m Triax FEP

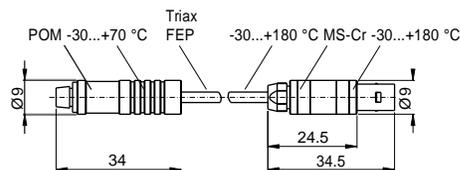

Level Detection

DC 3-wire High temperature versions
M18, M30, R 3/8", NPTF 3/8"








M18x1 non-flush 1...10 mm BCS00A1 BCS M18T4H1-XXS10H-SZ02-T08	M30x1.5 non-flush 1...20 mm BCS00A2 BCS M30T4G1-XXS20H-SZ02-T08	M18x1 non-flush Level adjustable BCS00A3 BCS S10T401-XXSFNC-SZ02-T07	R 3/8" non-flush Level adjustable BCS00A4 BCS S10T402-XXSFNC-SZ02-T07	NPTF 3/8" non-flush Level adjustable BCS00A5 BCS S10T403-XXSFNC-SZ02-T07
4...8 V DC -180...+250 °C IP 54	4...8 V DC -180...+250 °C IP 54	4...8 V DC -10...+180 °C IP 54 (Sensing face: IP 68 at max. 6 bar)	4...8 V DC -10...+180 °C IP 54 (Sensing face: IP 68 at max. 6 bar)	4...8 V DC -10...+180 °C IP 54 (Sensing face: IP 68 at max. 6 bar)
V2A	V2A	V2A	V2A	V2A
PTFE	PTFE	PTFE	PTFE	PTFE
PTFE/MS-Cr	PTFE/MS-Cr	PTFE/MS-Cr	PTFE/MS-Cr	PTFE/MS-Cr
Triax sensor cable	Triax sensor cable	Triax sensor cable	Triax sensor cable	Triax sensor cable



DC 3-wire
Tubular housings
SMARTLEVEL-
technology
High temperature rated styles
Leak sensor

AC/DC
2-wire
Tubular housings




For power supplies, amplifiers, connectors and mounting brackets see accessories section starting page 55



Level Detection


DC 3-wire Leak sensor
36x44x10 mm

The new Balluff leak sensor detects even the slightest amounts of liquid quickly and reliably. It thereby prevents costly damage in and around the equipment. The sensor features a chemically resistant housing and a PTFE jacketed cable, so that it can be used even in aggressive surroundings, such as in the semiconductor industry, without being damaged. The included mounting frame allows the sensor to be screwed directly to the floor. Sensor removal from the frame is also quick and easy. High EMC resistance increases operating reliability even further.

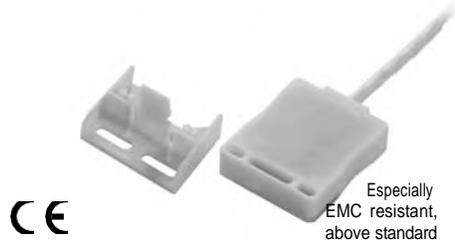

Especially
EMC resistant,
above standard

Housing size	36x44x10 mm		
Mounting	flush		
Rated switching distance s_n	1.3 mm		
Normally open	PNP/NPN selectable	Ordering code	BCS00H7
		Part number	BCS Z05AA02-GSCFNZ01-DT02
Normally closed	PNP/NPN selectable	Ordering code	BCS00H6
		Part number	BCS Z05AA02-GOCFNZ01-DT02
Supply voltage U_s	18...30 V DC		
Voltage drop U_a at I_o	≤ 2 V		
Rated insulation voltage U_i (protection class)	75 V DC		
Output current max.	50 mA		
No-load supply current I_o max.	≤ 20 mA		
Reverse polarity/short circuit protected	yes/yes		
Ambient temperature range T_a	-10...+70 °C		
Switching frequency f	10 Hz		
Output function indicator	LED red		
Degree of protection per IEC 60529	IP 67		
Material	Housing	PP	
	Sensing face	PP	
	Cover	PP	
Wiring	2 m cable PTFE, 3x0.2 mm ²		

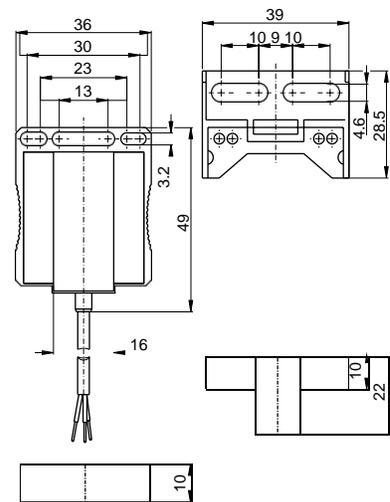

Mounting frame included in scope
of delivery

Level Detection

AC/DC 2-wire Tubular housings
M18, M30, Ø 34 mm




Housing size	M18x1	M30x1.5	Ø 34 mm
Mounting	non-flush	non-flush	non-flush
Rated switching distance s_n	8 mm	15 mm	20 mm
Normally open	Ordering code BCS000K Part number BCS M18KM3-UST80G-BV02	Ordering code BCS000W Part number BCS M30KN2-UST15G-AV02	Ordering code BCS0007 Part number BCS G34KN2-UST20G-AV02
Normally closed	Ordering code BCS000J Part number BCS M18KM3-UOT80G-BV02	Ordering code BCS000U Part number BCS M30KN2-UOT15G-AV02	Ordering code BCS0006 Part number BCS G34KN2-UOT20G-AV02
Supply voltage U_s	20...250 V AC/DC	20...250 V AC/DC	20...250 V AC/DC
Voltage drop U_d at I_a	≤ 6 V	≤ 6 V	≤ 6 V
Rated insulation voltage U_i (protection class)	250 V AC (I)	250 V AC (I)	250 V AC (I)
Output current max.	350 mA (AC)/100 mA (DC)	250 mA (AC)	250 mA (AC)
Reverse polarity/short circuit protected	no/no	no/no	no/no
Ambient temperature range T_a	-25...+80 °C	-25...+70 °C	-25...+70 °C
Switching frequency f	25 Hz (AC)/50 Hz (DC)	25 Hz (AC)/50 Hz (DC)	25 Hz (AC)/50 Hz (DC)
Output function indicator	LED yellow	LED yellow	LED yellow
Degree of protection per IEC 60529	IP 67	IP 65	IP 65
Material	Housing	PBT	PBT
	Sensing face	PBT	PBT
	Cover	PBT	PBT
Wiring	2 m cable PVC, 2x0.34 mm ²	2 m cable PVC, 2x0.34 mm ²	2 m cable PVC, 2x0.5 mm ²



DC 3-wire
Tubular housings
SMARTLEVEL technology
High temperature rated styles
Leak sensor
AC/DC 2-wire
Tubular housings

Wiring Diagrams

AC/DC N/O 2-wire (Cable)



AC/DC N/C 2-wire (Cable)

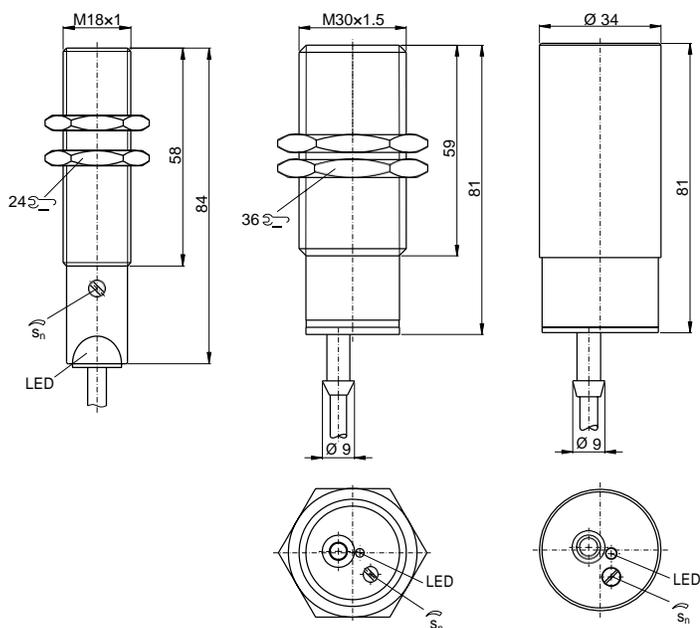

Mounting cuff included

For power supplies, amplifiers, connectors and mounting brackets see accessories section starting page 55






Accessories

Contents


The numerous varieties of capacitive sensors for individual solutions are enhanced by custom matched accessories. This means that power supplies assure continuity under different voltages, even at high loads. With standalone sensor amplifiers or combined amplifier power supplies, miniature sensors fit in almost any automation environment. Precisely matched mounting brackets ensure exact positioning in all situations.

A comprehensive line of connectors provides the best possible connectivity and ensures that Balluff capacitive sensors can be used anywhere in automation equipment.

Electrical Devices	Sensor Amplifiers	57
	Function Diagnostics	63
	Sensor Power Supplies	64
	Power supplies	66
Connectors	M8	70
	M12	71
	Field Attachables	72
Mounting Brackets	Side Tube Mount	75
	Capacitive Prox Mount	78
	Ball Joint Brackets	79
	Balluff Mounting System	80
Cover nuts	M8...M30	84
	Switch well	85
Adapters	Adapters	86



Electrical Devices
Connectors
Mounting
Components
Cover Nuts
Adapters

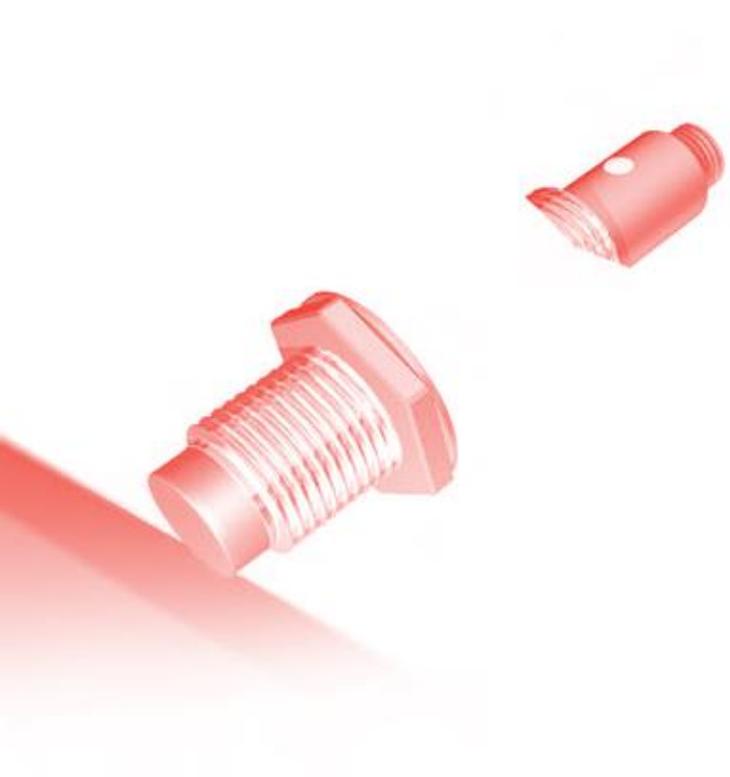

Accessories


Sensor amplifier for miniature sensor





Housing size	45x30x15 mm	
PNP Normally open	Ordering code	BAE009E
	Part number	BAE SA-CS-001-PS
PNP Normally closed	Ordering code	BAE009F
	Part number	BAE SA-CS-001-PO
NPN Normally open	Ordering code	BAE009H
	Part number	BAE SA-CS-001-NS
NPN Normally closed	Ordering code	BAE009J
	Part number	BAE SA-CS-001-NO
Supply voltage U_s	12...35 V DC	
Voltage drop U_d at I_a	0.8 V	
Rated insulation voltage U_i (protection class)	75 V DC	
Output current max.	300 mA	
No-load supply current I_o max.	20 mA	
Reverse polarity/short circuit protected	yes/yes	
Ambient temperature range T_a	-30...+70 °C	
Switching frequency f	100 Hz	
Function indicator	yes/yes	
Degree of protection per IEC 60529	IP 67	
Material	Housing	PC
Wiring	2 m cable PUR 3x0.14 mm ²	



Electrical Devices
Connectors
Mounting Components
Cover Nuts
Adapters

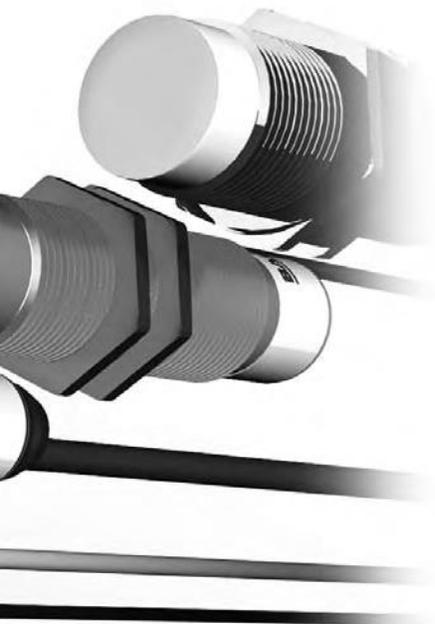

Wiring configuration

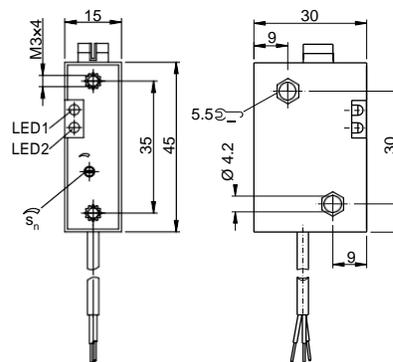

Function overview

LED 1: Switching status indicator

LED 2: Power indicator

Pos. 1: Through-hole Ø 4.2 mm,
hex well both sides
for inserting an M3 nut.

Accessories


Sensor amplifier for two miniature sensors

- Two discrete sensor amplifiers in one housing
- Two PNP and NPN transistor outputs
- Selectable N.O./N.C.
- Actuation delay (normally open) selectable 10 ms/2 s
- Turn-off delay (normally closed) selectable 10 ms/2s
- Screw terminal connections
- Switching distance for sensors separately adjustable
- Switching state indicated by two separate LEDs





Housing size	98.5x75x22.5 mm
Mounting	DIN rail (EN 60751)
PNP/NPN and NO/NC selectable	Ordering code BAE009P
	Part number BAE SA-CS-002-YP
Supply voltage U_s	10...35 V DC
Voltage drop U_d at I_o	0.8 V
Rated insulation voltage U_i (protection class)	75 V DC
Output current max.	300 mA
No-load supply current I_o max.	15 mA
Reverse polarity/short circuit protected	yes/yes
Ambient temperature range T_a	-30...+70 °C
Switching frequency f	100 Hz
Function indicator	yes/yes
Degree of protection per IEC 60529	IP40 (IP 20 terminal enclosure)
Material	PC
Wiring	max. 2.5 mm ² AWG 14

Wiring configuration



Display

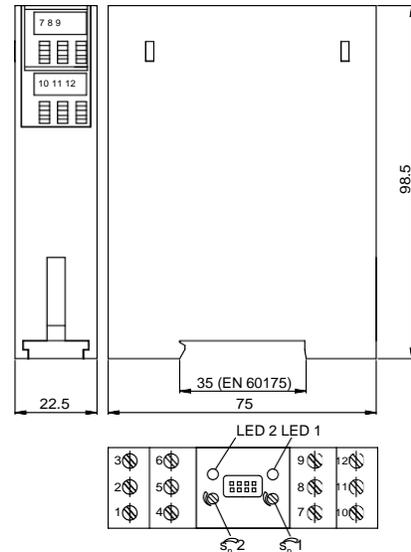

Accessories

Sensor amplifier for two miniature sensors with logic controller

Sensor amplifier with logic

- Connection for two capacitive sensors without internal amplifier
- Two PNP and NPN transistor outputs
- Turn-on delay selectable 10 ms/2s
- Function OR, AND, RS-FF, Min/Max selectable
- Screw terminal connections
- Switching distance for sensors separately adjustable
- Switching state indicated by two separate LEDs

OR function

Output Q active when either one or both sensors are activated.

AND function

Output Q active only when both sensors are activated.

RS-FF function


Output Q active when the sensor is first activated on the Set input. This status is retained until the sensor is activated again on the Reset input.

Function min/max

Output Q active when both sensors are activated. The output is only reset when both sensors are deactivated.




Housing size	98.5x75x22.5 mm
Mounting	DIN rail (EN 60751)
PNP/NPN and NO/NC selectable	Ordering code Part number
	BAE009R BAE SA-CS-003-YP
Supply voltage U_s Voltage drop U_o at I_o	10...35 V DC 0.8 V
Rated insulation voltage U_i (protection class) Output current max.	75 V DC 300 mA
No-load supply current I_o max. Reverse polarity/short circuit protected	25 mA yes/yes
Ambient temperature range T_a Switching frequency f	-30...+70 °C 100 Hz
Function indicator	no/yes
Degree of protection per IEC 60529	IP40 (IP 20 terminal enclosure)
Material	Housing PC
Wiring	max. 2.5 mm ² AWG 14





Electrical Devices
Connectors
Mounting Components
Cover Nuts
Adapters

Wiring configuration

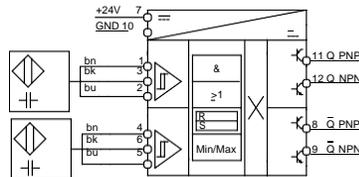

Display

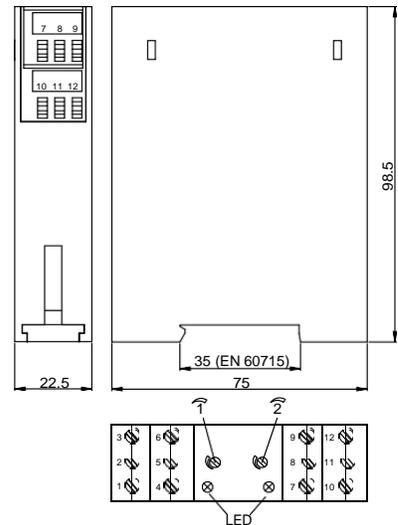


Accessories

AC powered sensor amplifier for miniature sensors with relay output




Housing size	98.5x75x22.5 mm	98.5x75x22.5 mm
Mounting	DIN rail (EN 60751)	DIN rail (EN 60751)
PNP/NPN and NO/NC selectable	Ordering code Part number	Ordering code Part number
	BAE009K BAE SA-CS-006-XR	BAE009L BAE SA-CS-007-XR
Supply voltage U_s	230 VAC	115 VAC
Rated insulation voltage U_i (protection class)	250 VAC	250 VAC
Output current max.	8 A	8 A
No-load supply current I_o max.	20 mA	20 mA
Reverse polarity/short circuit protected	no/no	no/no
Ambient temperature range T_a	-30...+70 °C	-30...+70 °C
Switching frequency f	10 Hz	10 Hz
Function indicator	no/yes	no/yes
Degree of protection per IEC 60529	IP 20	IP 20
Material	Housing PC	PC
Wiring	max. 2.5 mm ² AWG 14	max. 2.5 mm ² AWG 14


Wiring configuration



Display



- Potential free relay output
- Screw terminal connections
- Adjustable switching distance
- Switching state indicated by two separate LEDs

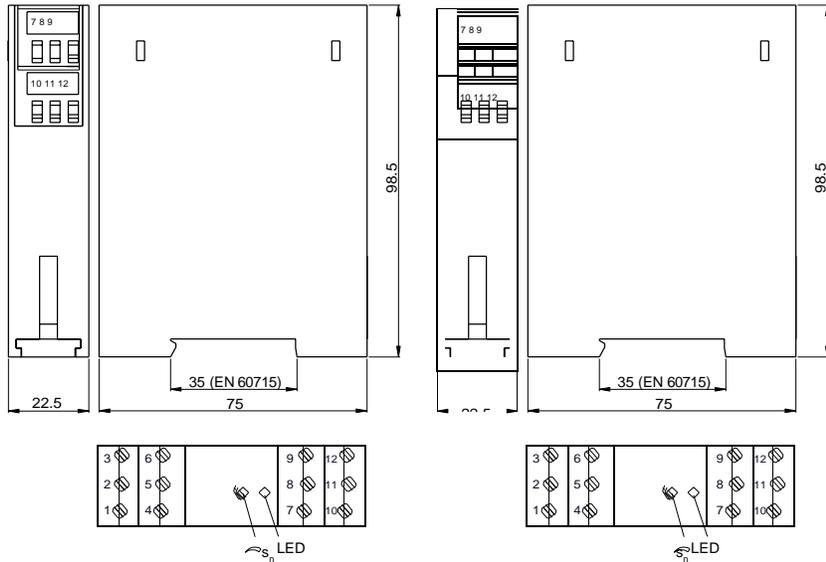


Accessories

AC powered sensor amplifier for miniature sensor with relay output and delay timer




Housing size	98.5x75x22.5 mm	98.5x75x22.5 mm
Mounting	DIN rail (EN 60751)	DIN rail (EN 60751)
PNP/NPN and NO/NC selectable	Ordering code BAE009M	BAE009N
	Part number BAE SA-CS-008-XR	BAE SA-CS-009-XR
Supply voltage U_s	230 VAC	115 VAC
Rated insulation voltage U_i (protection class)	250 VAC	250 VAC
Output current max.	8 A	8 A
No-load supply current I_0 max.	20 mA	20 mA
Reverse polarity/short circuit protected	no/no	no/no
Ambient temperature range T_a	-30...+70 °C	-30...+70 °C
Switching frequency f	10 Hz	10 Hz
Function indicator	no/yes	no/yes
Degree of protection per IEC 60529	IP 20	IP 20
Material	PC	PC
Housing		
Wiring	max. 2.5 mm ² AWG 14	max. 2.5 mm ² AWG 14




Electrical Devices
Connectors
Mounting Components
Cover Nuts
Adapters


Wiring configuration



Display



- Potential free relay output
- Adjustable delay timer 50ms...30s
- Screw terminal connections
- Adjustable switching distance
- Switching state indicated by two separate LEDs

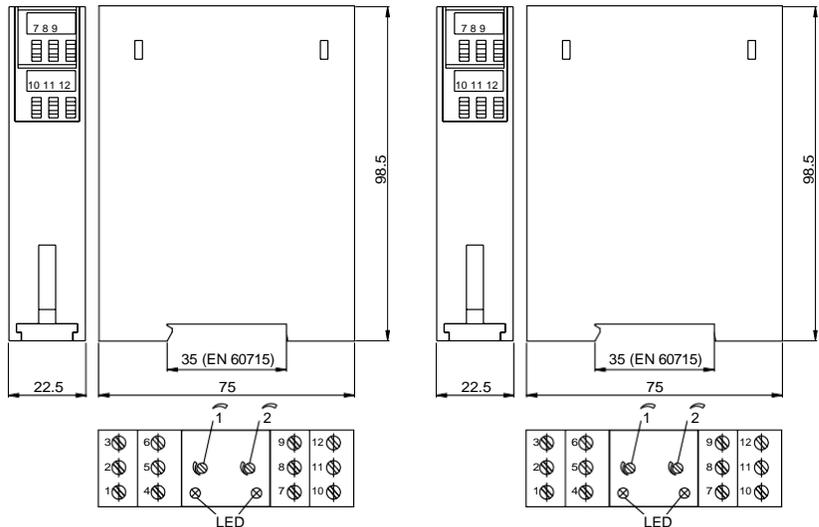


Accessories

AC powered sensor amplifier for two miniature sensors with relay output and min/max logic controller




Housing size	98.5x75x22.5 mm	98.5x75x22.5 mm
Mounting	DIN rail (EN 60751)	DIN rail (EN 60751)
PNP/NPN and NO/NC selectable	Ordering code BAE009T	BAE009U
	Part number BAE SA-CS-004-XR	BAE SA-CS-005-XR
Supply voltage U_s	230 VAC	115 VAC
Rated insulation voltage U_i (protection class)	250 VAC	250 VAC
Output current max.	8 A	8 A
No-load supply current I_o max.	20 mA	40 mA
Reverse polarity/short circuit protected	no/no	no/no
Ambient temperature range T_a	-30...+70 °C	-30...+70 °C
Switching frequency f	5 Hz	5 Hz
Function indicator	no/yes	no/yes
Degree of protection per IEC 60529	IP40 (IP 20 terminal enclosure)	IP40 (IP 20 terminal enclosure)
Material	PC	PC
Wiring	Housing max. 2.5 mm ² AWG 14	max. 2.5 mm ² AWG 14

Wiring configuration



Display



Function

When both sensors are deactivated, the relay turns on – “LED” empty” lights up (contact 7/9 closed).


If the Min sensor activates, the “LED fill” lights up. When both sensors are activated, the relay turnsoff – “LED full” lights up (contact 7/9 open).

Note:

If the Max sensor is activated, the “LED empty” lights up. The relay does not switch on until both sensors are deactivating again.

DIP switch functions

- S1 – Time delay Max-Sensor (off: approx. 0.2 s; on: approx. 5 s)
- S2 – Time delay Min-Sensor (off: approx. 0.2 s; on: approx. 5 s)
- S3 – Power-on-Setup (off: fill; on: empty)
- S4 – Output (relay inverse)

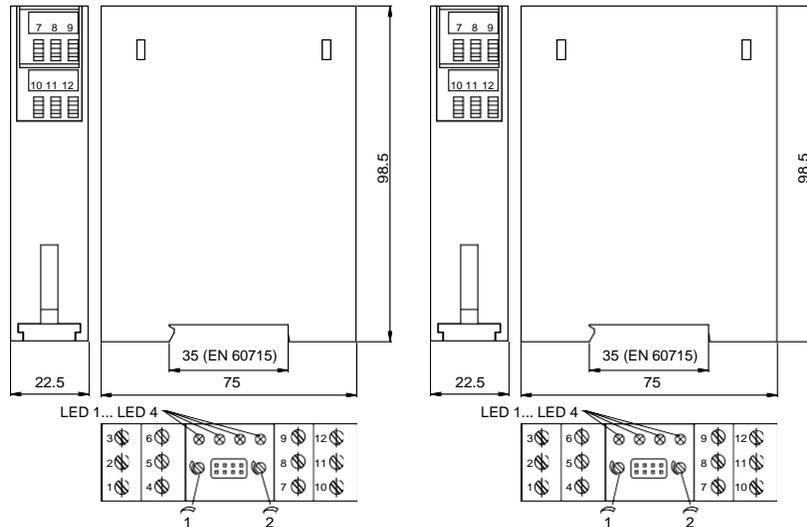


Function indicators

- A – Full
- B – Fill
- C – Empty
- D – Empty

Sensor adjustment

- Max-Sensor: Pot I
- Min-Sensor: Pot II

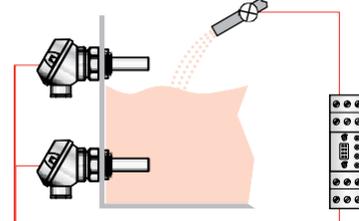


The BES 113-FD-1 function diagnostics unit monitors a proximity switch with dynamic function diagnostics including its cable. A logic circuit polls the sensor signals for the presence of test pulses and also monitors for proper function of the processor. For the machine controller it emits a High level signal on the "Status/Output" line when there is no fault and a Low signal when a fault is present. LEDs indicate the switching state of the sensor.

Recurring faults are stored by the device. They must be reset using a reset function (Low signal on 5).


If the BES 113-FD-1 is used as a single unit, terminals VI (3 and 4) must be jumpered together.



Description	Function diagnostics unit with electronic output	
Use	for function diagnostic sensors	
Ordering code	BAE006W	
Part number	BES 113-FD-1	
Supply voltage U_s	20...30 V DC	
No-load current	approx. 20 mA	
Output voltage U_o	low	0...(0.1x U_s) when the sensor or diagnostics unit has a fault)
(referenced to 0 V)	high	(0.5x U_s)... U_s when malfunctioning
Output current max.	50 mA	
Ambient temperature range T_a	0...+60 °C	
LED 1 green	„Ready/Error“ – in a faultless state the LED is on bright. When there is a fault the LED illuminates dimly).	
LED 2 yellow	„Sensor Output State“ indicates the switching state of the sensor.	
Degree of protection per IEC 60529	Housing IP 40, terminals IP 20	
Housing attachment	Rail mount per DIN EN 50022-35	
max. conductor cross-section	2x2.5 mm ²	



Electrical Devices
Connectors
Mounting Components
Cover Nuts
Adapters

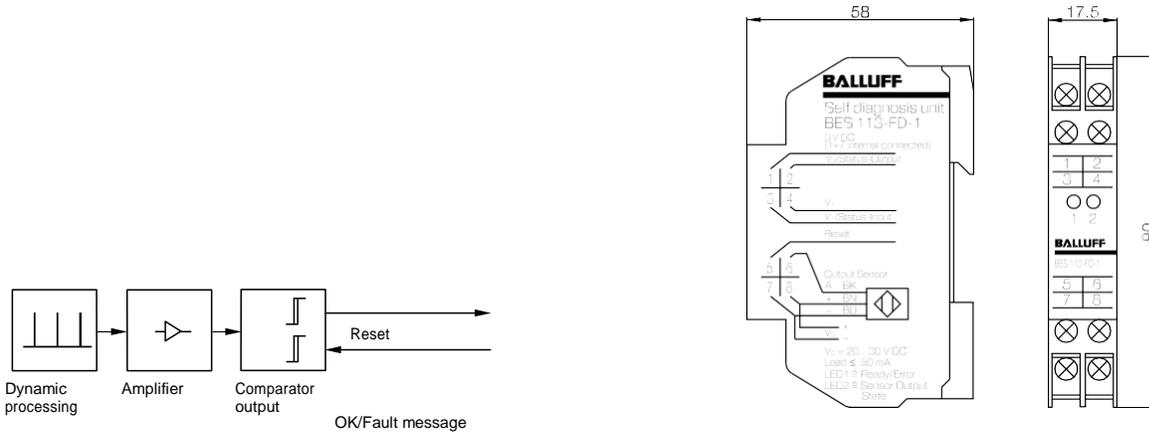


Cascading

When cascading several BES 113-FD-1 the output (2) must be connected to the input (3) of the amplifier. The jumper between VI is not needed except for the first device.

When there is a malfunction, the message appears on the last device. The defective sensor is indicated by the first weakly illuminated LED in the cascade.

Small and space-saving, the BES 113-FD-1 can be mounted in a DIN rail per DIN EN 50022-35.

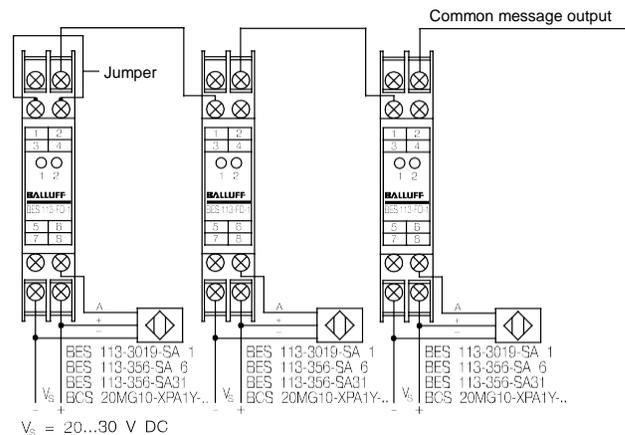

Accessories

AC powered sensor controller with relay output and timer delay






Housing size	98.5×75×22.5 mm	98.5×75×22.5 mm
Mounting	DIN rail (EN 60751)	DIN rail (EN 60751)
Potential-free changeover contact	Ordering code BAE009W	BAE009Y
	Part number	BAE SA-XE-010-XR
Supply voltage U_s	230 V AC	115 V AC
Output current max.	8 A	8 A
No-load supply current I_o max.	20 mA	40 mA
Ambient temperature range T_a	-30...+70 °C	-30...+70 °C
Switching frequency f	10 Hz	10 Hz
Function indicator	no/yes	no/yes
Degree of protection per IEC 60529	IP 20	IP 20
Material	PC	PC
Housing		
Wiring	Screw terminals	Screw terminals






Not suitable for devices with push-pull output (e.g. BCS S4...)

Wiring configuration

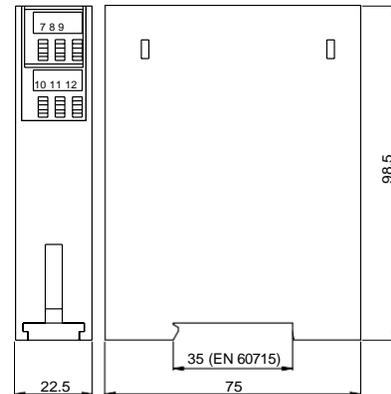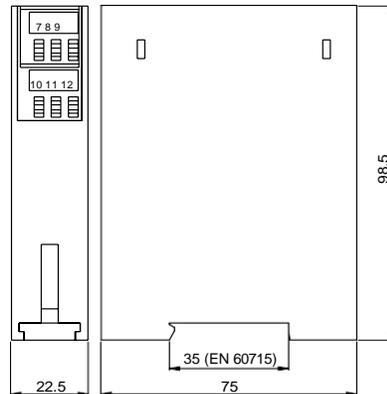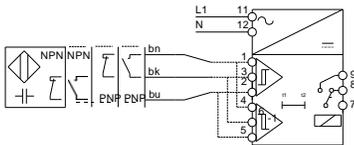

Display



- Actuation delay selectable 50ms..30s S1
- Turn-off delay selectable 50ms..30s S2

Accessories

AC powered sensor controller with relay output and min/max logic



230 VAC




115 VAC

Housing size	98.5x75x22.5 mm	98.5x75x22.5 mm
Mounting	DIN rail (EN 60751)	DIN rail (EN 60751)
Potential-free changeover contact	Ordering code BAE009Z	BAE00A0
	Part number BAE SA-XE-012-XR	BAE SA-XE-013-XR
Supply voltage U_s	230 V AC	115 V AC
Output current max.	8 A	8 A
No-load supply current I_o max.	20 mA	40 mA
Ambient temperature range T_a	-30...+70 °C	-30...+70 °C
Switching frequency f	5 Hz	5 Hz
Function indicator	no/yes	no/yes
Degree of protection per IEC 60529	IP 20	IP 20
Material	PC	PC
Wiring	Screw terminals	Screw terminals








Not suitable for devices with XDC output (e.g. BCS S4...)

Wiring configuration



Display

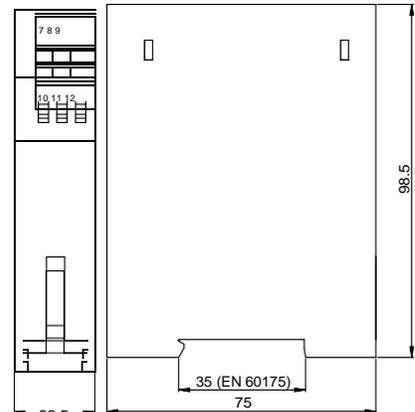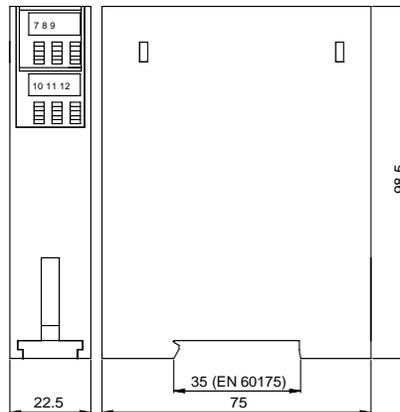

Function

When both sensors are deactivated, the relay turns on – “LED” empty lights up (contact 7/9 closed).

If the Min sensor activates, the “LED fill” lights up. When both sensors are activated, the relay turnsoff – “LED full” lights up (contact 7/9 open).

Note: If the Max sensor is activated, the “LED empty” lights up. The relay does not switch on until both sensors are deactivating again.

DIP switch functions


- S1 – Time delay Max-Sensor (off: approx. 0.2 s; on: approx. 5 s)
- S2 – Time delay Min-Sensor (off: approx. 0.2 s; on: approx. 5 s)
- S3 – Power-on-Setup (off: fill; on: empty)
- S4 – Output (relay inverse)

Function indicators

- A – Full
- B – Fill
- C – Empty
- D – Empty

Applications

- Min- and Max level control
- Input for connecting two miniature capacitive sensors for level sensing, adjustable separately using two potentiometers
- DC short circuit protected
- Turn-on delay for Min- and Max sensor selectable independently

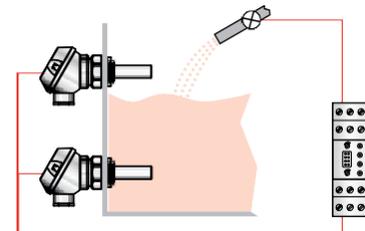



Electrical Devices
Connectors
Mounting Components
Cover Nuts
Adapters

Accessories

Power supplies single-phase input voltage
0.75 A



Output current	0.75 A
Output power	18 W
Output voltage	24 V DC
Input voltage	100...240 V AC
Ordering code	BAE0001
Part number	BAE PS-XA-1W-24-007-001
Input voltage range	90...265 V AC/120...370 V DC
Inrush current	115 V AC < 10 A/230 V AC < 18 A
Frequency range	47...63 Hz
Input fuse	T2 A/250 V AC internal
Voltage adjustment range	21.6. 28.8 V DC
Temperature coefficient	±0.02 %/°C
Ripple & Noise	50 mV
Holdup time	115 V AC > 20 ms/230 V AC > 75 ms
Status indicator DC ON	Green LED
Status indicator DC LOW	Red LED
Efficiency	77 %
Response	Hiccup mode
Switching frequency	> 100 kHz
Isolation voltage	3000 V AC
Isolation resistance	100 MΩ
Turn-on delay	< 1 s
Ambient temperature range	-25 °C...+71 °C
Derating	-3 %/°C above +61 °C
Parallel mode	Yes (with external diodes)
Degree of protection per IEC 60529	IP 20
Ready output	no
Cooling	Air convection
Housing material	Plastic
Weight	0.15 kg
approvals	CE, UL/cUL, TÜV

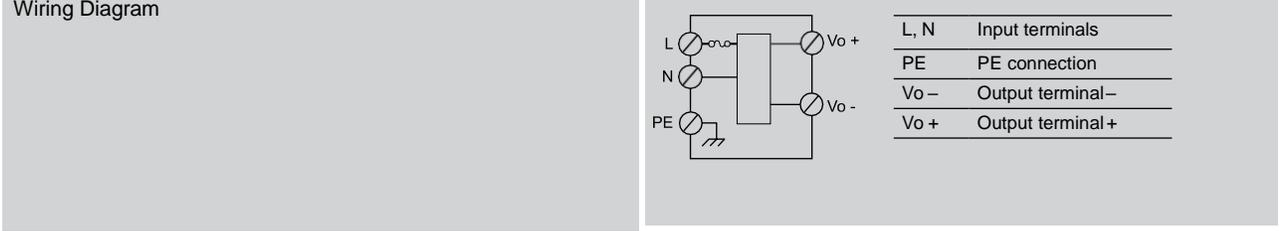


Accessories

Power supplies single-phase input voltage
1.25 A, 2.5 A






1.25 A
30 W
24 V DC
100...240 V AC
BAE0004
BAE PS-XA-1W-24-012-002
85...264 V AC/90...375 V DC
115 V AC < 20 A/230 V AC < 40 A
47...63 Hz
T2 A/250 V AC internal
24.0. 28.0 V DC
±0.02 %/°C
50 mV
115 V AC > 20 ms/230 V AC > 30 ms
Green LED

86 %
Forward characteristic
> 100 kHz
3000 V AC
100 MΩ
< 1 s
-25 °C...+71 °C
-2.5 %/°C above +61 °C
Yes (with external diodes)
IP 20
DC OK output
Air convection
Plastic
0.29 kg
CE, UL/cUL, TÜV

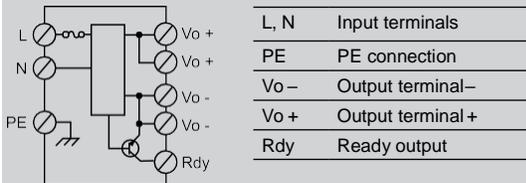

2.5 A
60 W
24 V DC
100...240 V AC
BAE0005
BAE PS-XA-1W-24-025-002
85...264 V AC/90...375 V DC
115 V AC < 30 A/230 V AC < 60 A
47...63 Hz
T2 A/250 V AC internal
24.0. 28.0 V DC
±0.02 %/°C
50 mV
115 V AC > 20 ms/230 V AC > 30 ms
Green LED

89 %
Hiccup mode
> 100 kHz
3000 V AC
100 MΩ
< 1 s
-25 °C...+71 °C
-2.5 %/°C above +61 °C
Yes (with external diodes)
IP 20
DC OK output
Air convection
Plastic
0.36 kg
CE, UL/cUL, TÜV

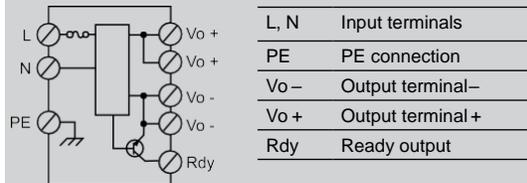

Electrical
Devices
Connectors
Mounting
Components
Cover Nuts
Adapters


Accessories

Power supplies Single-phase input voltage
5 A



Output current	5 A
Output power	120 W
Output voltage	24 V DC
Input voltage	115/230 V AC (Auto-Select)
Ordering code	BAE0006
Part number	BAE PS-XA-1W-24-050-003
Input voltage range	90...132 V AC; 186...264 V AC/210...370 V DC
Inrush current	115 V AC < 24 A/230 V AC < 48 A
Frequency range	47...63 Hz
Input fuse	T3.15 A/250 V AC internal
Voltage adjustment range	22.5. 28.5 V DC
Temperature coefficient	±0.03 %/°C
Ripple & Noise	50 mV
Holdup time	115 V AC > 25 ms/230 V AC > 30 ms
Status indicator DC ON	Green LED
Status indicator DC LOW	Red LED
Efficiency	86 %
Response	Current limiter
Switching frequency	> 80 kHz
Isolation voltage	3000 V AC
Isolation resistance	100 MΩ
Turn-on delay	< 1 s
Ambient temperature range	-25 °C...+71 °C
Derating	-2.5 %/°C above +61 °C
Parallel mode	yes
Degree of protection per IEC 60529	IP 20
Ready output	DC OK output relay
Cooling	Air convection
Housing material	Metal
Weight	0.92 kg
Approvals	CE, UL/cUL, TÜV

- L, N Input terminals
- PE PE connection
- Vo- Output terminal -
- Vo+ Output terminal +
- Rdy Ready output

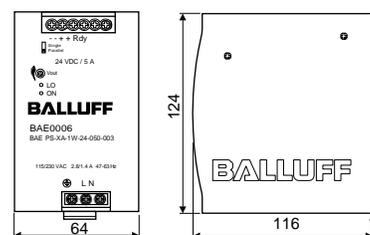


Accessories

Power supplies single-phase input voltage
10 A, 20 A




10 A
240 W
24 V DC
115/230 V AC (Auto-Select)
BAE0002
BAE PS-XA-1W-24-100-004
93...132 V AC; 186...264 V AC/210...370 V DC
115 V AC < 30 A/230 V AC < 60 A
47...63 Hz
T6.3 A/250 V AC internal
22.5. 28.5 V DC
±0.02 %/°C
100 mV
115 V AC > 25 ms/230 V AC > 30 ms
Green LED
Red LED
89 %
Current limiter
> 80 kHz
3000 V AC
100 MΩ
< 1 s
-25 °C...+71 °C
-2.5 %/°C above +61 °C
yes
IP 20
DC OK output relay
Air convection
Metal
1.0 kg
CE, UL/cUL, TÜV



L, N	Input terminals
PE	PE connection
Vo-	Output terminal-
Vo+	Output terminal+
Rdy	Ready output



20 A
480 W
24 V DC
115/230 V AC (Auto-Select)
BAE0003
BAE PS-XA-1W-24-200-005
90...264 V AC/120...370 V DC
115 V AC < 25 A/230 V AC < 50 A
47...63 Hz
T10 A/250 V AC internal
22.5. 28.5 V DC
±0.02 %/°C
100 mV
115 V AC > 25 ms/230 V AC > 30 ms
Green LED
Red LED
89 %
Current limiter
> 100 kHz
3000 V AC
100 MΩ
< 1 s
-25 °C...+71 °C
-2.5 %/°C above +61 °C
yes
IP 20
DC OK output relay
Air convection
Metal
1.92 kg
CE, UL/cUL, TÜV



L, N	Input terminals
PE	PE connection
Vo-	Output terminal-
Vo+	Output terminal+
Rdy	Ready output



Electrical Devices
Connectors
Mounting Components
Cover Nuts
Adapters

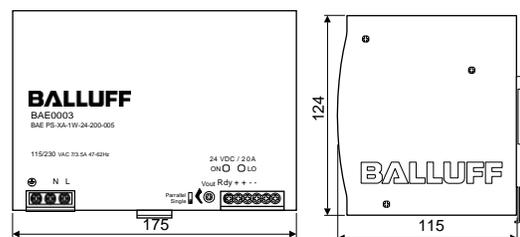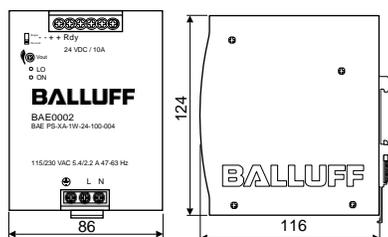

Accessories

M8-female straight and right-angle, 3-pin, no LED


M8



Connector diagram and wiring		
Operating voltage max. AC U_B	60 V AC	60 V AC
Operating voltage max. DC U_B	60 V DC	60 V DC
Cable	Molded-on	Molded-on
No. of wires x cross-section	3x0.34mm ²	3x0.34mm ²
Enclosure rating per IEC 60529	IP 67	IP 67
Ambient temperature T_a	PUR -25 °C...+80 °C	-25 °C...+80 °C
	PUR shielded -25 °C...+80 °C	-25 °C...+80 °C
	PVC -5 °C...+80 °C	-5 °C...+80 °C
	PVC shielded -5 °C...+80 °C	-5 °C...+80 °C
Use	Normally open	Normally open

Cable material	Color	Length	Ordering code
PUR	black	2 m	BCC02M8 BCC M313-0000-10-001-PX0334-020
PUR	black	5 m	BCC02M9 BCC M313-0000-10-001-PX0334-050
PUR	black	10 m	BCC02MA BCC M313-0000-10-001-PX0334-100
			BCC02ML BCC M323-0000-10-001-PX0334-020
			BCC02MM BCC M323-0000-10-001-PX0334-050
			BCC02MN BCC M323-0000-10-001-PX0334-100

Other cable materials, colors and lengths on request.
Connectors without LED are suitable for PNP and NPN switching functions.
NPN versions on request.

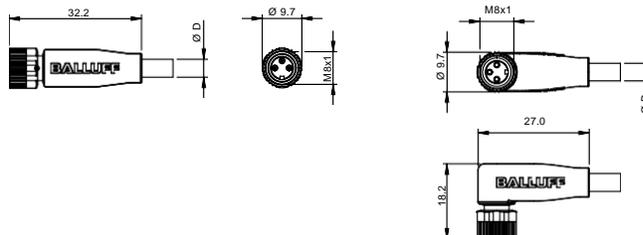

M12

Accessories

M12-female right-angle,
3-pin, no LED



PIN 1: brown
PIN 3: blue
PIN 4: black

PIN 1: brown
PIN 3: blue
PIN 4: black

250 V AC
250 V DC
Molded-on
3x0.34mm²
IP 68
-25 °C...+80 °C
-25 °C...+80 °C
-5 °C...+80 °C
-5 °C...+80 °C
Normally open

250 V AC
250 V DC
Molded-on
3x0.34mm²
IP 68
-25 °C...+80 °C
-25 °C...+80 °C
-5 °C...+80 °C
-5 °C...+80 °C
Normally open



Electrical Devices
Connectors
Mounting
Components
Cover Nuts
Adapters

Ordering code

Part number

BCC030K

BCC M415-0000-1A-001-PX0334-020

BCC030L

BCC M415-0000-1A-001-PX0334-050

BCC030M

BCC M415-0000-1A-001-PX0334-100

BCC0317





BCC M425-0000-1A-001-PX0334-020

BCC0318

BCC M425-0000-1A-001-PX0334-050

BCC0319

BCC M425-0000-1A-001-PX0334-100



Accessories

Field attachables

M8







Quick-connect system



Quick-connect system

Connector diagram					
System			Harax	Harax	
Style	Straight female	Straight male	Straight female	Straight female	
Operating voltage max. U_s	10...30 V DC	10...30 V DC	10...30 V DC	10...30 V DC	
Cable	For user assembly	For user assembly	For user assembly	For user assembly	
No. of wires x cross-section	3x0.14. 0.5 mm ²	3x0.14. 0.5 mm ²	3x0.14. 0.34 mm ²	3x0.14. 0.34 mm ²	
Cable diameter min.	max. Ø 5 mm	max. Ø 5 mm	max. 3.2. 5.4 mm	max. 3.2. 5.4 mm	
Wiring	Screw terminal	Screw terminal	Insulation displacement IDC	Insulation displacement IDC	
Enclosure rating per IEC 60529	IP 67	IP 67	IP 68	IP 68	
Ambient temperature range T_a	-40...+85 °C	-40...+85 °C	-5...50 °C	-5...50 °C	
Use	NO \swarrow or NC	NO \swarrow or NC	NO \swarrow or NC	NO \swarrow or NC	

Ordering code		Ordering code	
Part number		Part number	
BCC0157	BCC156	BCC02HC	BCC02HE
BKS-S142-00	BKS-141-00	BKS-S111-RT13	BKS-S113-RT13



Accessories

Field attachables

M12



Quick-connect system



Quick-connect system

Straight male
10...30 V DC
For user assembly
3/4xmax. 0.75 mm²
max. Ø 4...6 mm
Screw terminals
IP 67
-25...+90 °C
Complementary

Straight male
10...30 V DC
For user assembly
3/4xmax. 0.75 mm²
max. Ø 4...6 mm
Screw terminals
IP 67
-25...+90 °C
Complementary

Harax
Straight female
10...30 V DC
For user assembly
3/4x0.14. 0.34 mm²
max. Ø 4. 5.1 mm
Insulation displacement IDC
IP 67
-5...+50 °C
Complementary

Harax
Straight female
10...30 V DC
For user assembly
3/4x0.14. 0.34 mm²
max. Ø 4. 5.1 mm
Insulation displacement IDC
IP 67
-5...+50 °C
Complementary



Electrical Devices
Connectors
Mounting
Components
Cover Nuts
Adapters

Ordering code


Part number

RSC 4/7




RSCW 4/7

BCC02H8
BKS-S107-RT14

BCC02H9
BKS-S109-RT14

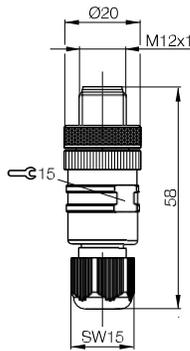

PX0602b



Accessories

Field attachables

M12



Connector diagram		
System		
Style	Straight female	Right angle female
Operating voltage max. U_s	10...30 V DC	10...30 V DC
Cable	For user assembly	For user assembly
No. of wires x cross-section	3/4xmax. 0.75 mm ²	3/4xmax. 0.75 mm ²
Cable diameter min.	max. Ø 4...6 mm	max. Ø 4...6 mm
Wiring	Screw terminals	Screw terminals
Enclosure rating per IEC 60529	IP 67	IP 67
Ambient temperature range T_a	-40...+85 °C	-40...+85 °C
Use	Complementary	Complementary

Ordering code


Part number

BCC0149

BKS-S 10-3


BCC0144

BKS-S 8-3

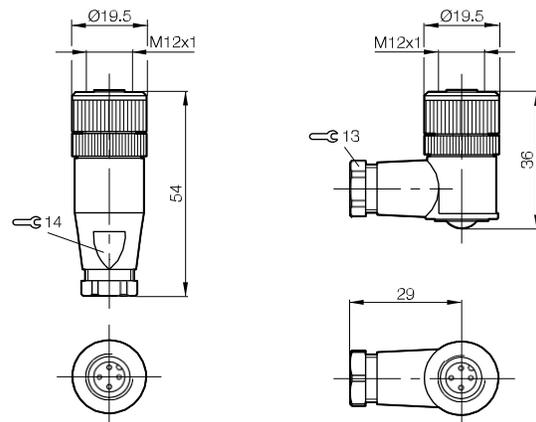


Accessories

Mounting brackets

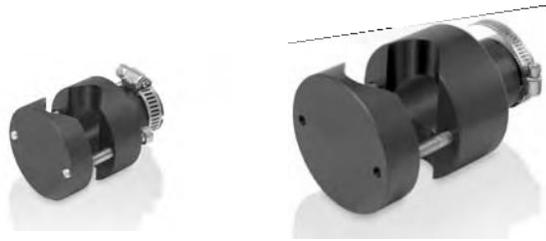


Fits	M12	M18	M30	ø 34 mm
Mounting - bracket		Split halves clamped with screws		
Mounting - sensor		Hose clamp		
Material		Plastic and stainless steel		
Dimensions (mm)				
A	10.5	11.7	19.1	19.1
B	29.5	38.1	67.8	67.8
C	38.1	45.0	69.9	69.9
D	12.1	18.1	30.1	34.1
Tube diameter (mm)	9.4-20.6	9.4-20.6	25.4-44.5	25.4-44.5
Tube diameter (inches)	0.37-0.81	0.37-0.81	1.0-1.75	1.0-1.75






Electrical Devices
Connectors
 Mounting Components
 Cover Nuts
 Adapters

Ordering code				
Part number				
BAM015E	BAM015F	BAM015H	BAM015J	
BCSA-SG-12-D	BCSA-SG-18-D	BCSA-SG-30-D	BCSA-SG-34-D	



Accessories Deliver Faster Changeover Time

A common application, tank level control, is now simple with Balluff BCSA sight glass mounts. On and off levels can be easily adjusted on the external tube by moving the sensors up or down as desired. The ability to make these process changes quickly saves you money and satisfies the need for high-accuracy feedback.




Accessories

Mounting brackets



Stackable
Row mounting

Description	Mounting clamp	Mounting clamp	Mounting clamp w/out positive stop	
Ø 4 mm	Ordering code BAM0094			
	Part number BES 04,0-KB-1			
Ø 6.5 mm	Ordering code BAM009C	BAM009F		
	Part number BES 06,5-KB-1	BES 06,5-KB-7		
Ø 8 mm	Ordering code	BAM00AA		
	Part number	BES 08,0-KB-7		
Ø 12 mm	Ordering code		BAM00C7	
	Part number		BES 12,0-KB-2	
Ø 18 mm	Ordering code		BAM00F6	
	Part number		BES 18,0-KB-2	
Ø 30 mm	Ordering code			
	Part number			
Form factor	for Ø 4 mm for Ø 6.5 mm		for Ø 12 mm for Ø 18 mm	
Dimension A			16 22	
Dimension B			40 45	
Dimension C			25 30	
Dimension D	Ø 4 Ø 6.5		Ø 12 Ø 18	
Dimension E				
Dimension F				
Dimension G				
Dimension H				
Dimension I				
Dimension J				
Material	PA 6	Al	PA 6	

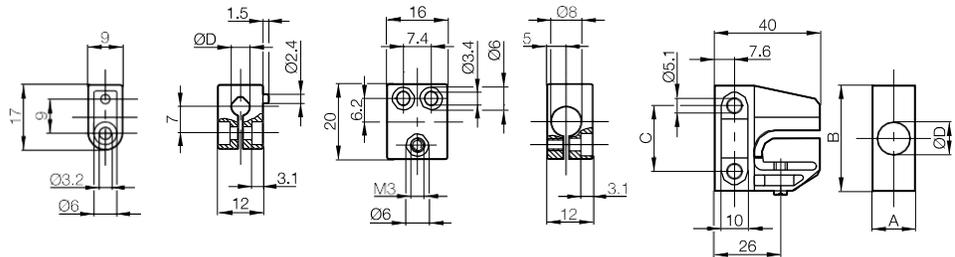


Accessories




Mounting brackets



	Mounting cuff					Mounting clamp w/out positive stop		Mounting clamp w/out positive stop		Mounting bracket			
	BAM009A BES 06,5-BS-1					BAM009E BES 06,5-KB-3							
	BAM00A2 BES 08,0-BS-1					BAM00A5 BES 08,0-KB-3				BAM009U BES 08,0-HW-1			
	BAM00C4 BES 12,0-BS-1							BAM00C9 BES 12,0-KB-3		BAM00C0 BES 12,0-HW-1			
	BAM00F2 BES 18,0-BS-1							BAM00F7 BES 18,0-KB-3		BAM00EY BES 18,0-HW-1			
	BAM00HN BES 30,0-BS-1									BAM00HH BES 30,0-HW-1			
	for Ø 6.5 mm	for Ø 8 mm	for Ø 12 mm	for Ø 18 mm	for Ø 30 mm	for Ø 6.5 mm	for Ø 8 mm	for Ø 12 mm	for Ø 18 mm	for Ø 8 mm	for Ø 12 mm	for Ø 18 mm	for Ø 30 mm
	17	17	22	26	42			18	24	25	25	30	40
	27	27	32	36	55			9	12	30	30	40	40
	16	16	20	26	38			9.7	13.5	30	30	40	60
	Ø 6.4	Ø 7.9	Ø 11.9	Ø 17.9	Ø 30	Ø 6.5	Ø 8	Ø 12	Ø 18	14	14	18	30
	12	12	12	12	18			28	28	12	9	11	19
	Ø 8	Ø 8	Ø 8	Ø 8	Ø 10			40	40	8.1	12.1	18.1	30.1
	Ø 4.5	Ø 4.5	Ø 4.5	Ø 4.5	Ø 5.5					5.2	5.2	5.2	5.2
	4.5	4.5	4.5	4.5	5.5					14	14	14	14
	8	8	10	13	19					4	4	5	5
	1	1	1	1	1.5								
	PA 6					PA 6		PA 6		Al			



Electrical Devices
Connectors
Mounting Components
Cover Nuts
Adapters

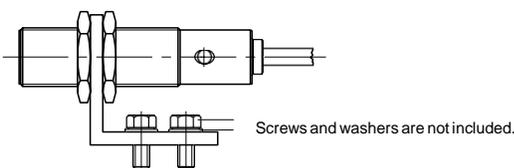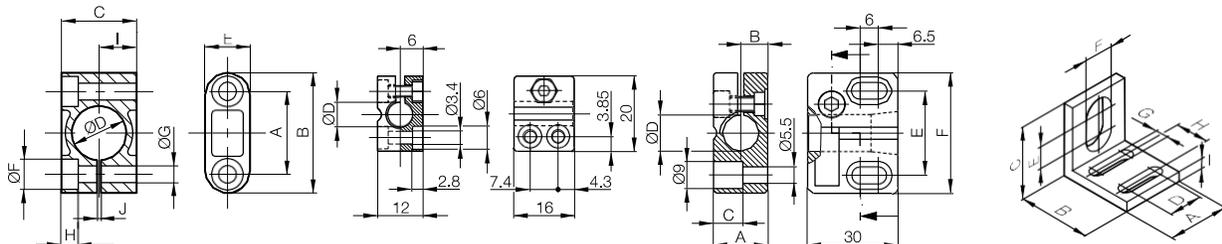

These aluminum mounting brackets provide a way of easily and quickly attaching sensors to the machine. For tubular sensors, we recommend the additional use of clamps (see page 78).




Use
For all sensors with corresponding diameter.

Accessories

Capacitive prox mounts




Description	Clamp with positive stop	Clamp with positive stop	Clamp with positive stop
Ø 8 mm			
Ordering code			BAM00AL
Part number			BES 08,0-KH-3L
Ø 12 mm			
Ordering code	BAM008E	BAM00E3	BAM00E2
Part number	BES 12,0-KH-5F	BES 12,0-KH-3X	BES 12,0-KH-3L
Ø 18 mm			
Ordering code			BAM00FY
Part number			BES 18,0-KH-3L
Form factor			
	for Ø 12 mm	for Ø 12 mm	for Ø 8 mm for Ø 12 mm for Ø 18 mm
Dimension A	M16x1	M16x1	M12x1 M16x1 M24x1
Dimension B	Ø 12	Ø 12	Ø 8 Ø 12 Ø 18
Dimension C	22.5	15.4	34 30 40
Dimension D	15.5	30	max. 14.5 max. 14.5 max. 19.5
Dimension E	flat-to-flat 22	flat-to-flat 22	flat-to-flat 17 flat-to-flat 22 flat-to-flat 30
Dimension F	flat-to-flat 22	flat-to-flat 22	flat-to-flat 17 flat-to-flat 22 flat-to-flat 30
Dimension G	4	3.8	4 4 5
Dimension H	2.1	2.1	2.1 2.1 3.2
Dimension I	0.8	1	0.5 1 1
Material	PBT fiberglass reinforced	PBT fiberglass reinforced	PBT fiberglass reinforced

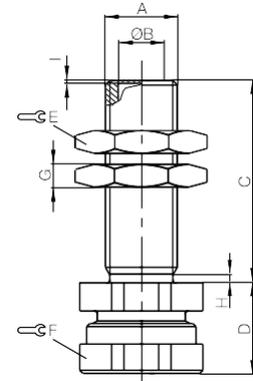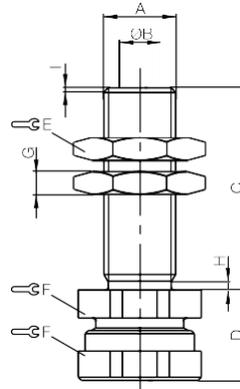

Installation example using BES ...-KH-3L

Particularly suitable for sensing in liquid media

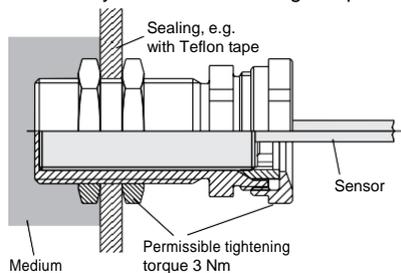


Accessories

Ball joint brackets



Description		Mounting cuff	Mounting clamp with ball joint	Mounting clamp with ball joint
Ø 12 mm	Ordering code	BAM00R2		
	Part number	BOS 12,0-BS-1		
Ø 18 mm	Ordering code		BAM00T3	
	Part number		BOS 18,0-KB-1	
Ø 30 mm	Ordering code			BAM00TN
	Part number			BOS 30,0-KB-1
Material		Plastic	PA 6	PA 6

Electrical Devices
Connectors
Mounting Components
Cover Nuts
Adapters

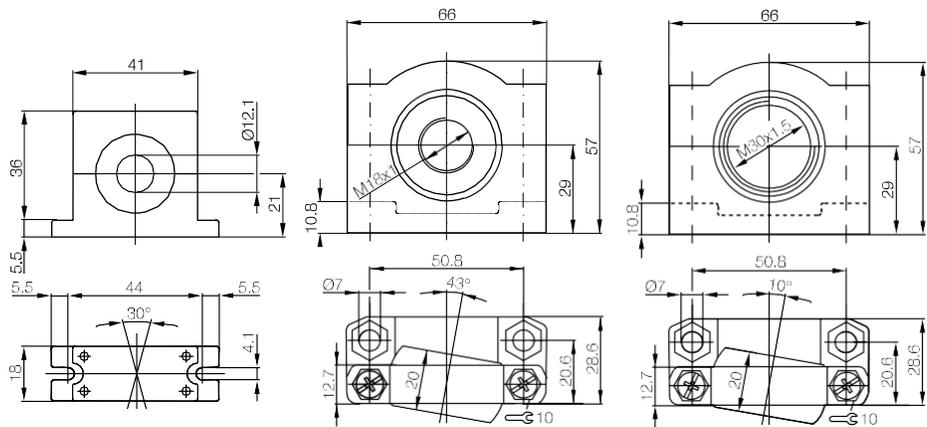

Accessories

Mounting system

Whether sensors are used in machine tools, assembly and handling, in packaging or specialty machines - one thing is certain: to work properly they must be precisely positioned. The Balluff Mounting System makes this simple.

Balluff offers you not only the highest quality sensors, but also a full line of mounting accessories that provide optimum positioning of the sensors in equipment and on machines.


The Balluff mounting system can be used on base plates or on all commonly available extruded profiles and for tubular or block-style sensors. The flexible accessories kit allows you to cover virtually any required spatial angle, and even offers supplementary accessories such as reflector holders and adapter plates.

Description	
Style	
Use	
Ordering code	
Part number	
Ordering code	
Part number	
Ordering code	
Part number	
Material	

Mounting rods Ø 12 mm, anodized Al

Ordering code	Part number	Length
BAM002R	BMS RS-M-D12-0150-00	150 mm
BAM002T	BMS RS-M-D12-0250-00	250 mm
BAM002U	BMS RS-M-D12-1000-00	1000 mm

(for user assembly)

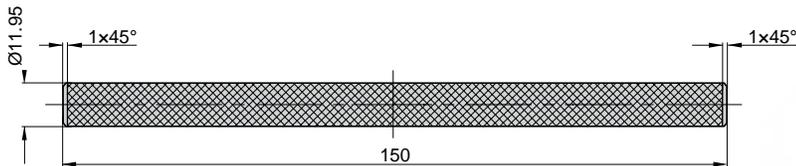

The mounting rods are knurled full-length. This prevents any position change.




Accessories

Mounting system



Base holder	Articulated base holder	Sensor Holder	Cross-connector
for 1 rod Ø 12 mm or 10x10 mm for mounting on base plates or extrusions	for 1 rod Ø 12 mm for mounting on base plates or extrusions	for 1 rod Ø 12 mm or 10x10 mm for tubular sensors M8, M12, M18	for 2 rods Ø 10/12 mm or 10x10 mm Connecting element for 2 rods Ø 10/12 mm or 10x10 mm
BAM002J	BAM002Y	BAM002K	BAM003U
BMS CU-P-D12-A040-00	BMS CUJ-P-D12-R040-00	BMS CS-P-D12-AD08-00	BMS CC-P-D10-A-00
		BAM002N	BAM002M
		BMS CS-P-D12-AD12-00	BMS CC-P-D12-A-00
		BAM002P	
		BMS CS-P-D12-AD18-00	
POM	POM	POM	POM

Electrical Devices
Connectors
Mounting Components
Cover Nuts
Adapters

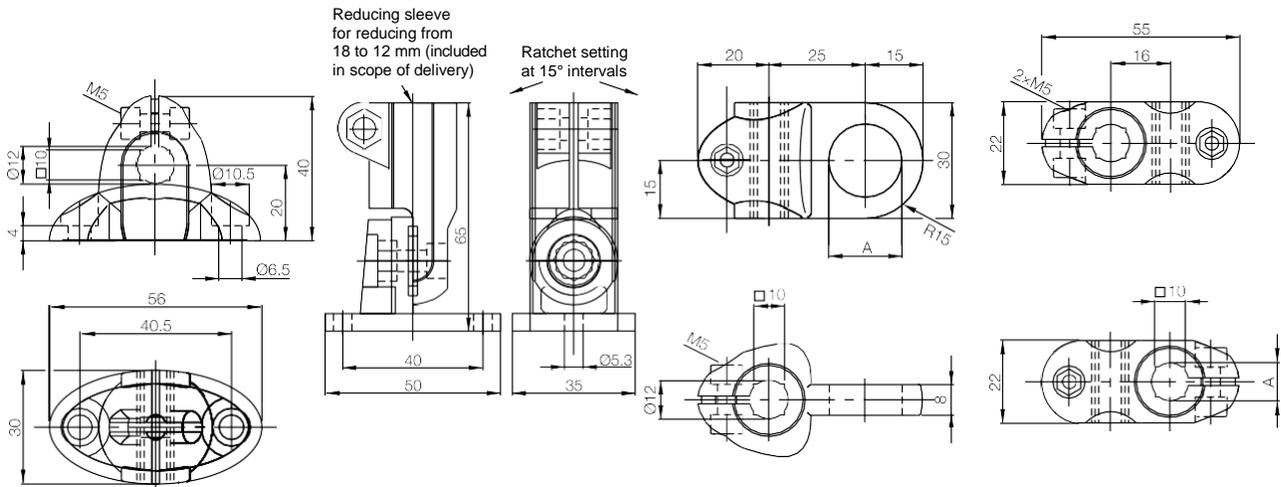

A
BMS CS-...08 Ø 8
BMS CS-...12 Ø 12
BMS CS-...18 Ø 18

A
BMS CC-P-D10... Ø 10
BMS CC-P-D12... Ø 12




Accessories

Mounting system



Description	Cross-connector	Base holder	Base holder	
Style	for 2 rods \varnothing 12 mm	for 1 rod \varnothing 12 mm (vertical or horizontal)	for clamping cylinder	
Use	Connecting element for 2 rods \varnothing 12 mm	for mounting on base plates or extrusions	for mounting on base plates or extrusions	
Ordering code	BAM002Z	BAM002W	BAM0044	
Part number	BMS CC-M-D12-B-00	BMS CU-M-D12-A040-00	BMS CS-M-D12-IO60-01	
Ordering code				
Part number				
Ordering code				
Part number				
Material	Anodized Al	Anodized Al	Stainless steel	

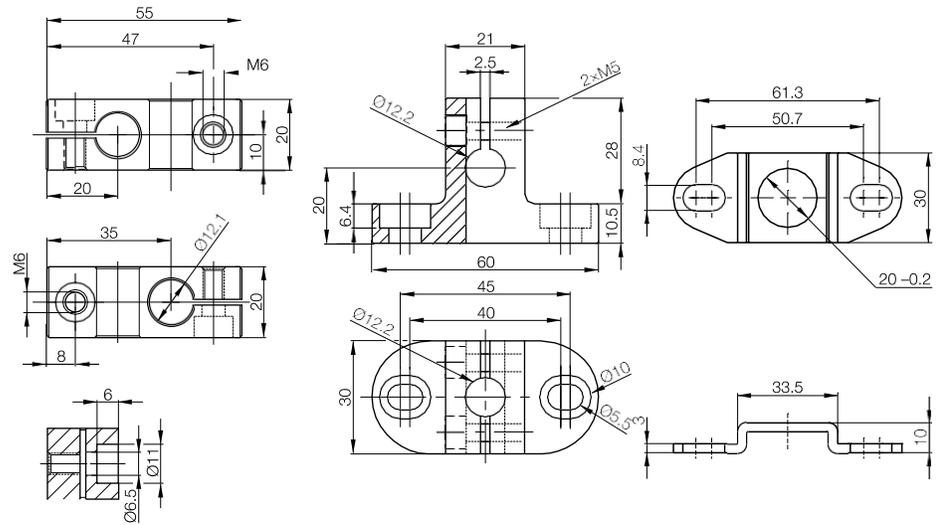

Accessories

Mounting system



Clamping cylinder

Accommodates all holders, sensors and reflectors

BAM0031

BMS CS-M-D12-IZ

GD-Zn

Sensor Holder

for clamping cylinder

for tubular sensors M8, M12, M18 and all clamps M8...M18

BAM0036

BMS CS-M-D12-ID08-01

BAM0037

BMS CS-M-D12-ID12-01

BAM0032

BMS CS-M-D12-ID18-01

Stainless steel

Sensor Holder

for clamping cylinder

for tubular sensors M30

BAM0033

BMS CS-M-D12-ID30-01

BAM003M

BMS CS-M-D12-ID36-01

Stainless steel

Adapter ring

for 2x BMS CS-M-D12-IZ

for clamping cylinder



BAM003J

BMS AD-M-003-D12/IZ



Anodized Al



Electrical Devices
Connectors
Mounting Components
Cover Nuts
Adapters

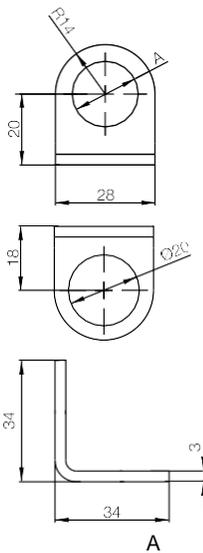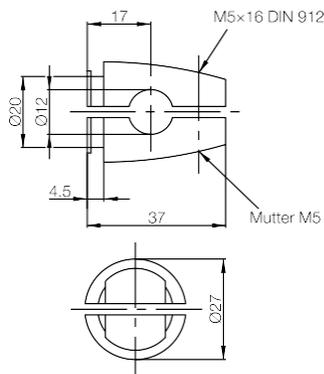

BMS CS-...08 Ø 8
BMS CS-...12 Ø 12
BMS CS-...18 Ø 18

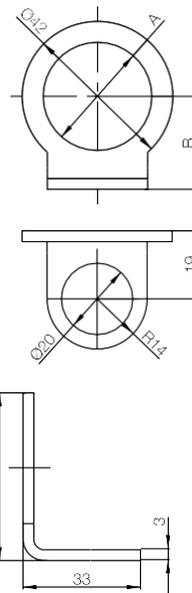

	A	B	C
BMS CS-...30	Ø 30.2	26	47
BMS CS-...36	Ø 36.5	30	54







Accessories

PTFE covers



Description	Cover nut	Cover nut	Cover nut	Cover nut
Ordering code	BAM009Z	BAM00A0	BAM00C2	BAM00EZ
Part number	BES 08-SM-1	BES 08-SM-1F	BES 12-SM-2	BES 18-SM-1
Material	This cover nut is threaded on to a M8x1 housing. It is made of PTFE and protects the active surface from weld splatter.	This cover nut is threaded on to a M8x1 housing. It is made of PTFE and protects the active surface from weld splatter.	This cover nut is threaded on to a M12x1 housing. It is made of POM and is used when mechanical stress is greater.	This cover nut is threaded on to a M18x1 housing. It is made of PTFE and can be used on welding equipment to protect the sensing face. It is also applicable in high temperatures and especially resistant to chemical influences.
	Please note! The nominal switching distance of proximity switches is reduced by 1 mm when the cover nut is installed.	Please note! The nominal switching distance of proximity switches is reduced by 1 mm when the cover nut is installed.	Please note! The nominal switching distance of proximity switches is reduced by 1 mm when the cover nut is installed.	Please note! The nominal switching distance of proximity switches is reduced by 1 mm when the cover nut is installed.



Accessories

PTFE switchwells



Cover nut
BAM00F0
BES 18-SM-2

This cover nut is threaded on to a M18x1 housing. It is made of POM and is used when mechanical stress is greater.

Please note!
The nominal switching distance of proximity switches is reduced by 1 mm when the cover nut is installed.

Cover nut
BAM00F1
BES 18-SM-3

This cover nut is threaded on to a M18x1 housing. It is made of PTFE and when properly installed can withstand up to 14 bar.

Please note!
The nominal switching distance of proximity switches is reduced by 2 mm when the cover nut is installed.

Cover nut
BAM00HJ
BES 30-SM-1

This cover nut is threaded on to a M30x1.5 housing. It is made of PTFE and can be used on welding equipment to protect the sensing face. It is also applicable in high temperatures and especially resistant to chemical influences.

Please note!
The nominal switching distance of proximity switches is reduced by 1 mm when the cover nut is installed.

Cover nut
BAM00HK
BES 30-SM-2

This cover nut is threaded on to a M30x1.5 housing. It is made of POM and is used when mechanical stress is greater.

Please note!
The nominal switching distance of proximity switches is reduced by 2 mm when the cover nut is installed.


Cover nut
BAM00H2
BES 30-SM-3

This cover nut is threaded on to a M30x1.5 housing. It is made of PTFE and when properly installed can withstand up to 14 bar.

Please note!
The nominal switching distance of proximity switches is reduced by 2 mm when the cover nut is installed.



Electrical Devices
Connectors
Mounting Components
Cover Nuts
Adapters

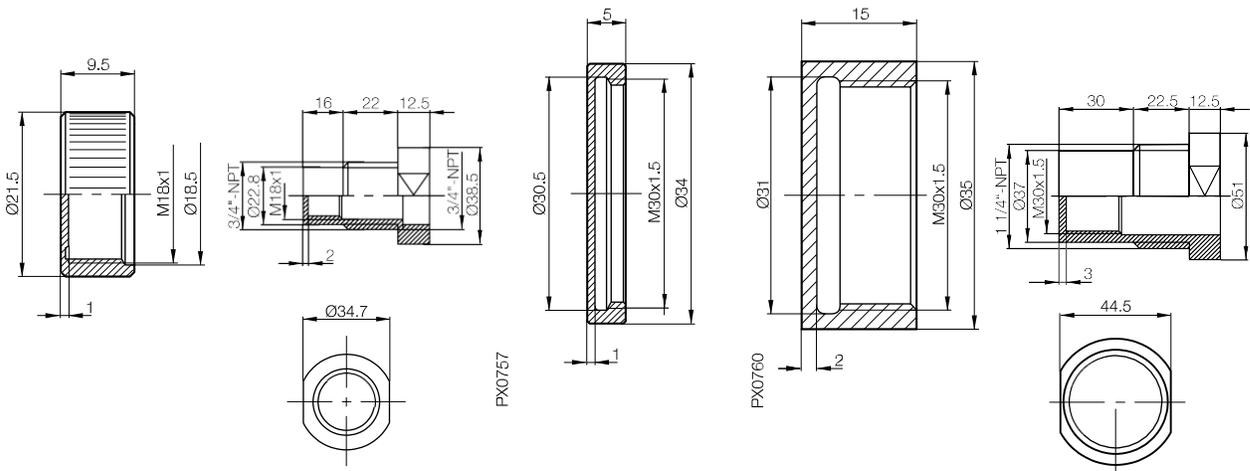


Protective Teflon™ switchwells are perfect for attaching capacitive sensors to containers for level detection.

Accessories

Adapters



Description	Adapter for Micro-Level M12 to M18	Adapter for Micro-Level M12 to G 1/2"	Adapter for BCS S01/2/3 M18 to M30	Adapter for BCS S01/2/3 M18 to M32	
Ordering code	BAM018J	BAM018K	BAM018E	BAM018F	
Part number	BAM AD-XA-002-M12/M18-4	BAM AD-XA-002-M12/G1/2"-4	BAM AD-XA-001-M18/M30-4	BAM AD-XA-001-M18/M32x1,5-4	
Material	V2A	V2A	V2A	V2A	
Ambient temperature range T _a					
Wiring					


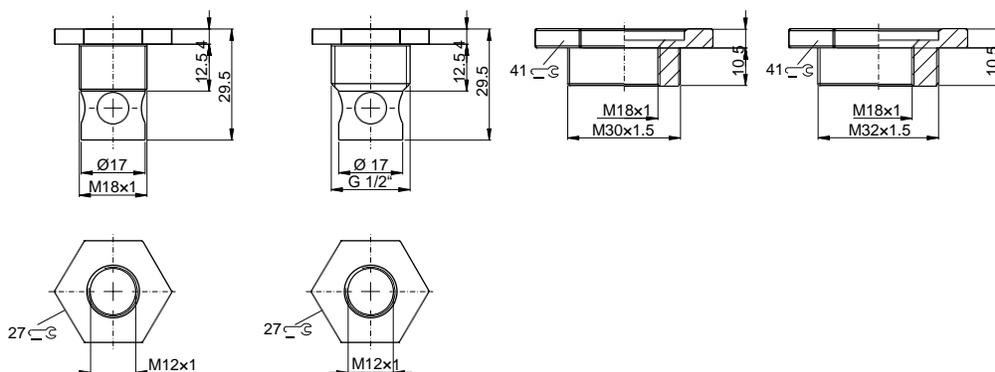


Accessories Adapters



**Adapter
for BCS S01/2/3
M18 to R 1"**
BAM018H
BAM AD-XA-001-M18/R1"-4
V2A

**Adapter
for BCS S01/2/3
M16 to M12**
BCC04JT
BCC M454-0000-2A-RM004-020
MS-Ni/PA
-30...+70 °C
0.2 cable PVC,
3x0.25 mm²




Electrical Devices
Connectors
Mounting
Components
Cover Nuts
Adapters



Fundamentals and Definitions

Balluff BCS capacitive sensors are classic object and level detectors that can reliably detect levels of liquids, bulk material, and granulates directly or indirectly through non-metallic container walls. They evaluate the change in capacitance which an object creates when it enters the electrical field of a capacitor. Thus capacitive sensors can detect not only metals, but also non-conductors and simply “see” through non-metallic materials.

Function principle	90
Installation notes	91
Electrical definitions	92
Correction factors and conductivity values for SMARTLEVEL	95
Mechanical definitions	96
Quality statement	97
Setup guidelines	98
Balluff global network	100
Index and short order codes	103

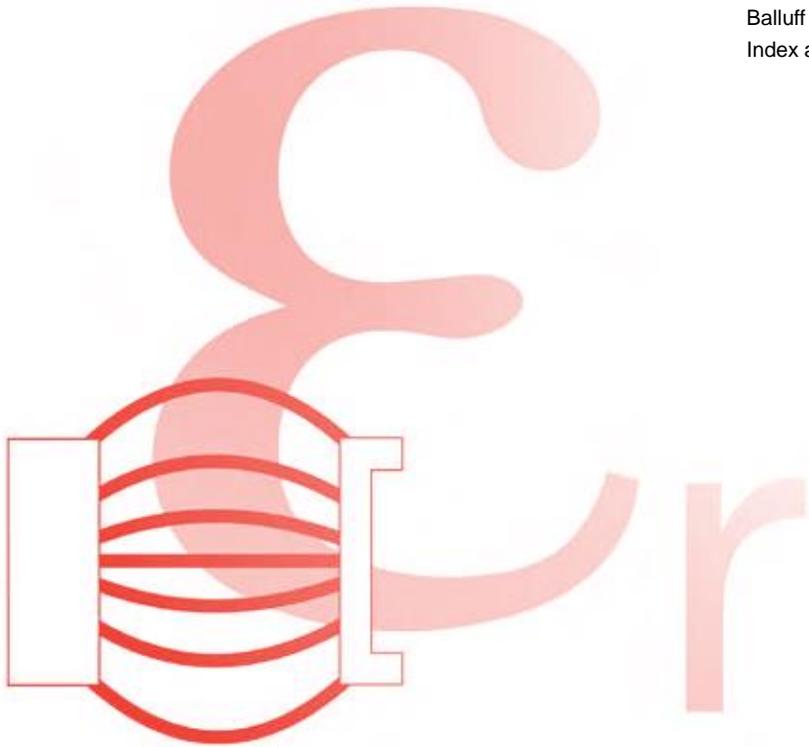

Fundamentals and Definitions

Functional principle


Functional principle

The non-contact capacitive sensor converts a variable of interest in technical production terms (e.g. object or level) into a signal which can be further processed. The function is based on an alternating electro-static field around its active zone.

The sensor is comprised essentially of:

- Sensor electrode and shielding
- Oscillator
- Demodulator
- Trigger
- Output driver

These two electrodes form the open capacitor of the sensing surface and are part of an RC oscillator.

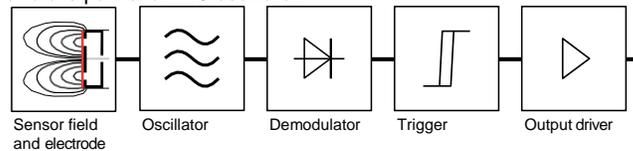

When metallic or non-metallic objects approach the sensing area of the capacitive sensor, the capacitance changes and the oscillator begins to oscillate. This causes the trigger stage downstream of the oscillator to trip depending on the user adjusted threshold level, and the switching amplifier to change its output status.

The behavior and function of a capacitive sensor can be best explained using the equation for capacitance below:

$$C = \epsilon_0 \times \epsilon_r \times F \times (1/S)$$

ϵ_r : Relative dielectric constant (property of the target medium)


ϵ_0 : Absolute dielectric constant, unchanging

F: Area

S: Distance


From the formula above it follows that objects will be detected depending on the material specific dielectric constant, its relative size compared to the sensing field and the distance in between.

For example a presence detection application has a constant relative dielectric and area if the target object remains the same, but differs in the distance. Indirect level detection applications usually keep the distance and area to the target constant but vary the relative dielectric constant - the non-metallic tank wall in conjunction with the changing target level inside.

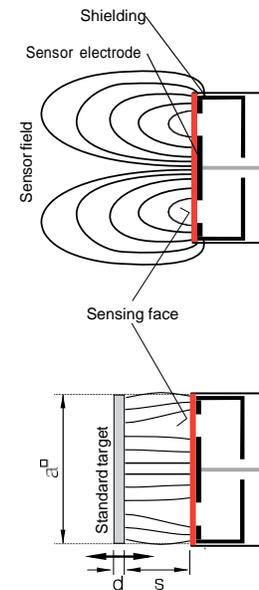


Sensors for object detection (flush/shielded)

Sensors with a rectilinear electrical field. These devices detect solids (e.g. wafers, components, PCBs, hybrids, cartons, stacks of paper, glass or plastic bottles, plastic blocks and sheets) from a distance, or liquids indirectly through a partition wall made of glass or plastic (thickness max. 4 mm), and should in individual cases be tested beforehand with samples.



Sensors for level detection (non-flush/unshielded)

Sensors with a spherical electrical field. These devices are designed to detect product, bulk goods or liquids (e.g. granulate, sugar, flour, corn, sand, or oil and water) immersed in the medium or through a non-metallic tank wall. The choice of the appropriate sensor depends on the operating conditions and the type of medium and should in each case be tested beforehand with samples.




Fundamentals and Definitions

Mounting restrictions


Flush-mount (shielded) proximity switches

... can be installed with their sensing faces flush to the surrounding material.
The distance between two proximity switches (in row mounting) must be $\geq 2d$.

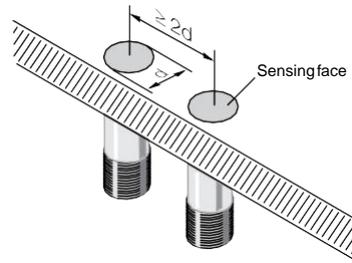


Non-flush (unshielded) proximity switches

The sensing face must extend $\geq 2s_n$ from the surrounding material.
The distance between two proximity switches must be $\geq 2d$.

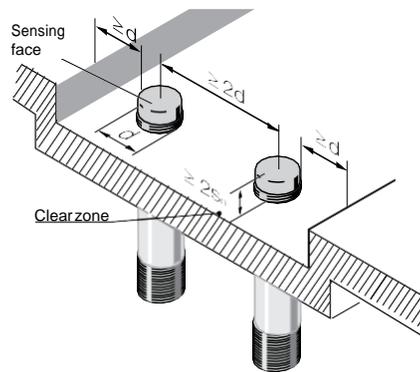

Opposing installation

... requires a minimum distance of $\geq 4d$ between the sensing faces.

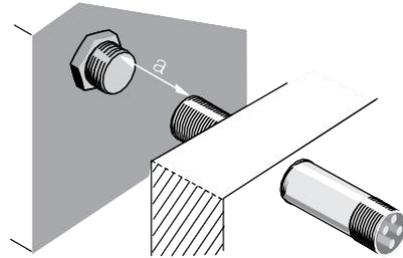


NOTE: Non compliance with above guidelines will result in unreliable operation and cross talk between sensors.

Fundamentals and Definitions

Electrical definitions

Sensing face	... is the area through which the high-frequency electro-static field enters the air space. It is determined mainly by the surface area of the cover cap and corresponds approximately to the area of the outer sensor electrode.
Standard target	... is a grounded, square metal plate made of Fe 360 (ISO 630), with the switching distance determined per EN 60947-5-2. The thickness is $d = 1 \text{ mm}$; and the side length a corresponds to either the diameter of the circle of the sensing face or $3x s_n$, if the value is greater than the given diameter.
Rated switching distance s_n	... is a theoretical value, which does not take into account manufacturing tolerances, sample differences, operating temperatures, supply voltages, etc.
Effective operating distance s_e	... is the switching distance of a single proximity switch measured under specified conditions such as flush mounting, rated operating voltage U_e , temperature $T_a = +23 \text{ °C} \pm 5 \text{ °C}$. For out capacitive sensors, the effective operating distance s_e can be adjusted by the potentiometer.
Hysteresis	... is the distance difference between the switch-on point when approaching, and the switch-off point when the target is receding from the active surface.
Repeat accuracy	... is the maximum sensing distance differential between any two measurements, measured within 8 hours with multiple "approaches" to the target object. The repeat accuracy generally lies between 2 and 5% of the effective operating distance s_e .
Switching frequency	... is a succession of periodically repeated activation and deactivation of the sensors during a specified interval (one second). Measuring method in conformity with IEC 60947-5-2.
Ambient temperature range T_a	... specifies the temperature range at which the sensor may be operated. Balluff manufactures both sensors for the standard temperature range $-30 \dots +70 \text{ °C}$ and sensors for more elevated temperature requirements up to $+250 \text{ °C}$.
Temperature drift	... states the amount by which the sensing distance may change in dependence on the ambient temperature. This lies between 15 and 20% of the effective operating distance s_e within the stated operating temperature range.



Fundamentals and Definitions

Electrical definitions

Switching function

N.O. (normally open): the sensor closes a circuit to the load when a target is detected or the sensor is operated. Contacts are open when the sensor is not operated and when there is no external force on the actuator.

N.C. (normally closed): The sensor opens a circuit to the load when a target is detected or the sensor is operated. Contacts are closed when the sensor is not operated and when there is no external force on the actuator.





DC 3-/4-wire

PNP (+) sourcing



Cable/terminals

Connector

Normally open



Normally closed





NPN (-) sinking



Cable/terminals

Connector

Normally open




Normally closed



PNP/NPN selectable

NO/NC user selectable
(XDC - output)




AC/DC 2-wire


Protection isolated (Protection Class II)

Cable/terminals

Normally open



Normally closed



Wire colors, marking
per DIN IEC 60757

BN	brown
BK	black
BU	blue
WH	white

Fundamentals and Definitions

Electrical definitions

Supply voltage U_s	... is the nominal voltage, or voltage range at which the device is designed to be operated continuously.
Voltage drop U_d	... is the voltage measured across the active output of the proximity switch when carrying the operational current flows under specified conditions.
Ripple	... is the maximum permissible AC voltage which may be superimposed on the DC supply voltage U_s without affecting the function of the sensor.
Output current or operating current I_o	... is the maximum current with which the sensor may be loaded at its output in continuous operation.
Standby current	... is the maximum current consumption of the sensor at maximum supply voltage U_s with no switched load.
Short-circuit protection and overload protection	In the event of overload or short-circuit at the output, the output transistor is automatically switched off. As soon as the malfunction has been corrected, the output stage is reset to normal function.
Reverse polarity protection	The sensor electronics are protected against possible polarity reversal or interchanging of the connection wires.

Fundamentals and Definitions


Reduction factors and SMARTLEVEL conductivity values

Operating conditions and correction factors

If an electrically non-conducting target enters the active sensor field, the capacitance changes proportionally to ϵ_r and to the immersion depth or to the distance to the sensing face.

The rated maximum switching distance s_n is measured with a grounded metal target made of Fe 360. All materials other than this grounded metal plate will result in a reduced maximum sensing range by the stated approximated reduction factors below.

Correction factors for typical materials

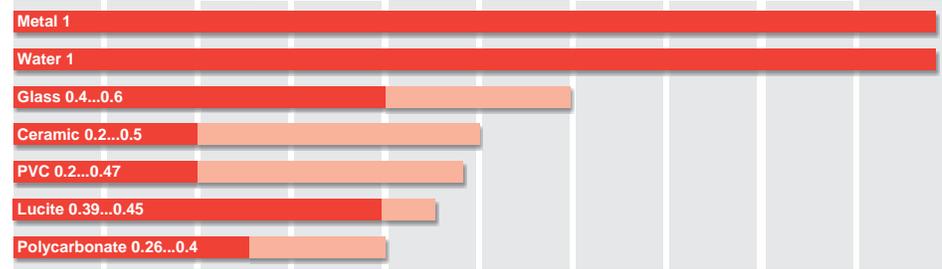


Correction factors for typical materials

NOTE: Reduction factor values are just approximations and should be specifically determined for each application.

Applications for SMARTLEVEL sensors with conductivity values

The following chart gives an approximated overview of electrical conductivity values for specific liquids. SMARTLEVEL Sensors rely on the conductivity for detection and compensation. Matching the right SMARTLEVEL sensor becomes especially crucial for challenging applications. The media and conductivity values given here are only guide values and are for general orientation only. Changing material composition and concentrations can affect the conductivity values substantially.

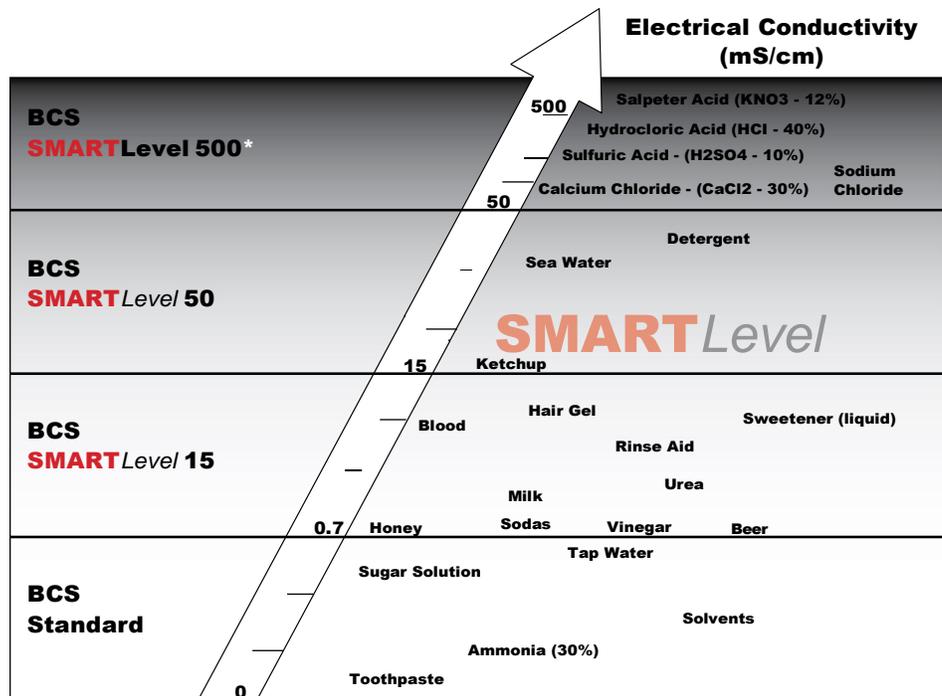

*Contact factory for availability

Fundamentals and Definitions

Mechanical definitions

Mounting torques

To ensure that the sensors are not mechanically destroyed during installation, make sure that you comply with the following torque figures.

Housing size	Material	Tightening torque
M5x0.5	V2A	3 Nm
M8 x 1	V2A	15 Nm
M12x1	V2A	40 Nm
M18x1	V2A	60 Nm
M30x1.5	V2A	90 Nm

Housing materials

Sensors can be supplied for almost all environmental conditions by choosing and combining the appropriate housing material.

Material	Use and characteristics
Plastics	
FEP Tetrafluorethylene-Perfluorpropylene	High temperature resistance up to 180 °C, insulation material for cable
PA Polyamide	High impact resistance, good chemical resistance
PBT/PET Polybutylenterephthalate/ Polyethylenterephthalate	High mechanical strength and temperature resistance. Some types flame-retardant. Good chemical resistance. Good oil resistance.
PC Polycarbonate	Clear, hard, elastic and impact resistant. Good temperature resistance. Limited chemical resistance
POM Polyoxymethylene	High impact resistance, good mechanical strength. Good chemical resistance
PP Polypropylene	Very good electrical properties. Impact resistant, tough, mechanically resilient. Very low water uptake. Good to very good chemical resistance
PSU Polysulfone	High temperature resistance, high impact resistance, good chemical resistance, FDA approved (food grade)
PTFE Polytetraflourethylene	Best temperature and chemical resistance, FDA approved (food grade)
PUR Polyurethane	Elastic, abrasion-resistant, impact-resistant. Good resistance to oils, greases, solvents (used for gaskets and cable jackets)
PVC Polyvinylchloride	Good mechanical strength and chemical resistance (cable)
Metal	
V2A Stainless steel	Excellent corrosion resistance and strength. Quality , 1.4301: Standard material for foods industry.

Insulation class

II [EN 60947-5-2/IEC 60947-5-2

Protection

The degrees of protection IP 20, IP 40, IP 54, IP 64 up to IP 68 are in accordance with IEC 60529. Code letters IP (International Protection) designate protection against shock hazard, ingress of solid foreign bodies, and water, for electrical equipment.

IP 69K

Protection against ingress of water at high pressure and steam cleaning per DIN 40050 Part 9.

First digit:

- 2 Protection against penetration of solid bodies larger than 12 mm, shielding from fingers and objects
- 4 Protection against penetration of solid bodies larger than 1 mm, shielding from tools and wires
- 5 Protection against harmful dust deposits, complete shock-hazard protection
- 6 Protection against penetration of dust, complete shock-hazard protection

Second digit:

- 0 No special protection
- 4 Protection against water spraying from all directions against the piece of equipment concerned
- 5 Protection against a water jet from a nozzle, directed from all directions against the piece of equipment concerned
- 7 Protection against water, when the piece of equipment concerned (housing) is immersed in water under specified pressure and time conditions
- 8 Protection against water during continuous submersion

Fundamentals and Definitions

Quality statement

Quality Management System in accordance with DIN EN ISO 9001:2008

Balluff Companies

Balluff GmbH	Germany
Balluff SIE Sensorik GmbH	Germany
Balluff Elektronika Kft	Hungary
Balluff Ltd.	Great Britain
Balluff Automation s.r.l.	Italy
Balluff Inc.	USA
Balluff GmbH	Austria
Balluff CZ, s.r.o	Czech Republic
Balluff Hy-Tech AG	Switzerland
Balluff Sensortechnik AG	Switzerland
Balluff Controles Eléctricos Ltda.	Brazil
Balluff de México S.A. de C.V.	Mexico



Environmental Management System per DIN EN ISO 14001:2005

Balluff Companies

Balluff GmbH	Germany
Balluff Elektronika Kft	Hungary

Testing Laboratory

The Balluff testing laboratory works in accordance with ISO/IEC 17025 and is accredited by the DATech for Testing of Electromagnetic Compatibility (EMC).



Balluff products meet the EU Directives

Products requiring marking are subjected to a conformity evaluation process according to the EU Directive and the product is marked with the CE Marking. Balluff products fall under the following EU Directives:

2004/108/EC	EMC Directive
2006/95/EC	Low-Voltage Directive applies to AC and AC/DC sensors



Approvals

... are granted by national and international institutions. Their symbols affirm that our products meet the specifications of these institutions. "US Safety System" and "Canadian Standards Association" under the auspices of Underwriters Laboratories Inc. (cUL).



Balluff is a member of ALPHA

ALPHA, an association for testing and certification of low-voltage devices, promotes the individual responsibility of the manufacturer of such devices by means of uniform test procedures according to current standards and thereby supports the attainment of such high product quality. ALPHA also grants nationally recognized product certificates when certain conditions are met. Through ALPHA's membership in LOVAG (Low Voltage Agreement Group), its certificates are also recognized in other European countries.




Fundamentals and Definitions

Setup guidelines

Flush (shielded) sensors

Flush mountable sensors are normally being used for presence detection of objects or for indirect point level detection of solids, powders or liquids. The following two setup routines help to assure proper setup and operations.

All BCS sensors allow sensitivity adjustment potentiometer.



Presence Detection of Solid Objects

The following procedures are outlined for setting a normally open capacitive sensor for ideal sensing conditions:


1. Mount the sensor in the actual sensing position
2. Set up the target for the worst case condition. This means for a presence detection application to move the object to the farthest occurring position from the sensor.
3. All BCS capacitive sensors are already factory preset to their maximum operational sensing range. The sensor has to move closer to the target object, if the farthest object position does not assure a reliable switching. Alternatively, a larger sensor with a larger sensing range can be chosen.
4. The sensitivity can now be reduced by turning the potentiometer CCW until the sensor switches off. Increase now the sensitivity CW by 1/2 turn to set the sensor to its optimal sensitivity setting.

Example:

In the following example, a shielded capacitive sensor in a M12 tubular housing will be used to detect a ceramic plate. The sensor is factory preset to a maximum rated switching distance s_n of 4 mm to metal or by approximation to your hand. When moving the sensor towards the target object, the rated switching distance s_n to the ceramic plate has been reduced to approx. 2mm. This distance is now the maximum permissible switching distance for the ceramic plate.

Note:

To ensure that Balluff's BCS capacitive sensors work reliably within their technical specifications, they have a greater sensing distance than the indicated maximum rated switching distance s_n in the datasheet. If the user decides to adjust the sensor to a switching distance greater than 2mm for the above described ceramic plate, the sensor will operate in an unreliable mode. This entails a risk that temperature and other environmental factors or electrical interferences may lead to unreliable switching conditions.



Point-Level Detection through Container Walls

Empty Setup (normally open)

1. Mount the sensor in the actual level sensing position flush to the non-metallic container wall.
2. All BCS capacitive sensors are already factory preset to their maximum operational sensing range. The sensor will initially trigger on the container wall material.
3. The sensitivity has to be reduced to by turning the potentiometer CCW until the sensor switches off. Increase now the sensitivity CW by 1/2 turn to set the sensor to its optimal sensitivity setting.
4. The sensor should switch on at 40% to 50% sensing area coverage - readjust the sensitivity CCW if the coverage is above 50% and CW if it is below 40%.



Full Setup (normally open)

1. Mount the sensor in the actual level sensing position flush to the non-metallic container wall.
2. All BCS capacitive sensors are already factory preset to their maximum operational sensing range. The sensor will initially switch on to the container wall.
3. The sensitivity has to be reduced by turning the potentiometer CCW until the sensor switches off. Increase now the sensitivity CW by 1/2 turn to set the sensor to its optimal sensitivity setting.
4. The sensor should switch on at 40% - 50% sensing area coverage - readjust the sensitivity CCW if the coverage is above 50% and CW if it is below 40%.

Note:



The partition wall may only be made of glass or plastic. A rule of thumb for the maximum thickness of the wall yields a value of approx. 10 to 20% of the sensor's rated switching distance, but max. 4 mm. SMARTLevel sensors can sense through up to 12mm of wall, but are limited to water-based or conductive liquids.

For very small amounts of liquids and small tank radiuses which do not allow a tight form-fitting mounting, the sensors should be adjusted for approx. 30% sensing area.

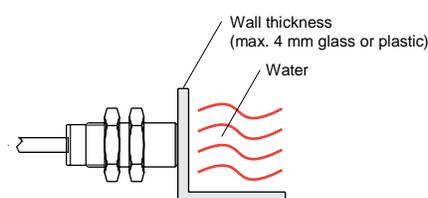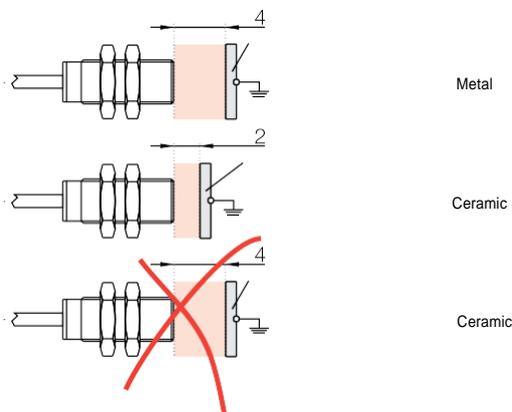

Non-Flush (unshielded) sensors

These capacitive sensor use a larger spherical electrical field which is especially suited for level detection of liquids, granulates or powders.



Direct Point-Level detection

Full Setup (normally open)

1. Mount the sensor in the actual level sensing position with regards to the minimum clearance guide line in our mounting reference.
2. All BCS capacitive sensors are already factory preset to their maximum operational sensing range. The sensor will initially switch on contact with the target material.
3. The sensitivity has to be reduced by turning the potentiometer CCW until the sensor switches off. Now increase the sensitivity CW by 1/2 turn to set the sensor to its optimal sensitivity setting.

This setup procedure assures that the influence of temperature and material build-up has been reduced to a minimum. In some instances, the target material creates extensive material build-up or has a very high relative dielectric constant (conductivity) leading to uncontrollable repetitive false triggering. SMARTLevel sensors will assure in these applications reliable operations and automatic compensation for such kind of disturbance factors.

Direct or Indirect Level Detection of Water-based or Conductive Liquids


SmartLevel sensors use a new patented capacitive sensing technology to detect water-based or other conductive liquids direct or indirect through non-metallic container walls. SMARTLevel sensors do not require any preliminary sensitivity adjustment for container walls up to 6mm but are able to penetrate up to 12mm with additional adjustment described in the following for empty and full containers.

Empty setup (normally open)

1. Mount the sensor in the actual level sensing position flush to the non-metallic container wall.
2. The sensor will stay off independent of the container wall. Turn the sensitivity adjustment slowly CW until the sensor turns on.
3. The sensitivity now has to be reduced by slowly turning the potentiometer 3-turns CCW.
4. The sensor should switch on at 40% to 50% sensing area coverage - readjust the sensitivity CCW if the coverage is above 50% and CW if it is below 40%.

Full Setup (normally open)

1. Mount the sensor in the actual level sensing position flush to the non-metallic container wall.
2. The sensor switches on if the thickness of the container wall is below 6mm, and stay off if it is thicker.
3. Adjust the sensor now CCW until it barely switches off or CW until it barely switches on.
4. Increase the sensitivity CW by another 1/2 turn to set the sensor to its optimal sensitivity setting.
5. The sensor should switch on at 40% to 50% sensing area coverage - readjust the sensitivity CCW if the coverage is above 50% and CW if it is below 40%.

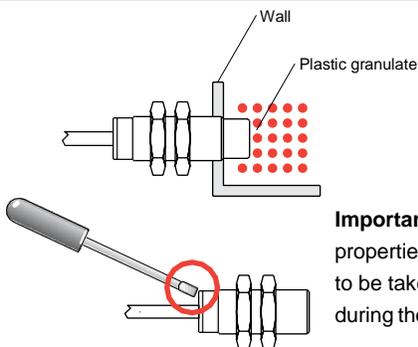

Important: Different material properties and conditions have to be taken into consideration during the calibration process.

All Balluff BCS capacitive sensors are therefore equipped with highly accurate trim potentiometers to adjust the

device's sensitivity. Turning the potentiometer clockwise (CW) increases the sensitivity, whereas counter-clockwise (CCW) turning reduces it.

Capacitive Sensors

Global Contacts

Balluff North America



Florence, Kentucky USA

Enjoying one of the highest growth rates in the automation industry, Balluff's Florence, Kentucky United States headquarters is located just south of Cincinnati, Ohio. Our customers are in industries such as automotive, machine tool, robotics, injection molding, packaging, material handling, and more.

In addition to sales, marketing, and logistic functions, this facility manufactures regionally focused inductive proximity sensors and Micropulse® magnetostrictive linear position sensors.


The Balluff Global Network



Balluff spans the globe with representation in 49 countries.



Argentina	Bulgaria
Australia	Canada
Austria	China
Belarus	Columbia
Belgium	Croatia
Brazil	Czech Republic

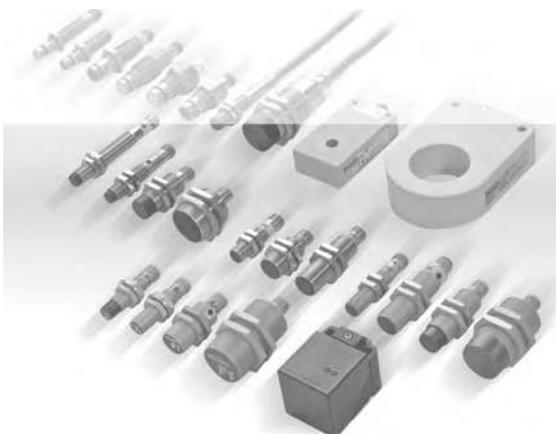

Germany World Headquarters

Balluff GmbH
Schurwaldstraße 9
73765 Neuhausen a.d.f.
Phone: (+49 71 58) 1 73-0
Fax: (+49 71 58) 50 10



For a complete global listing visit www.balluff.com/global



Denmark	Hungary	Japan	Pakistan	Singapore	Switzerland
Finland	India	Korea	Phillipines	Slovakia	Thailand
France	Indonesia	Malaysia	Poland	Slovenia	Taiwan
Great Britain	Iran	Mexico	Portugal	South Africa	Turkey
Greece	Israel	Netherlands	Romania	Spain	USA
Hong Kong	Italy	Norway	Russia	Sweden	Venezuela

USA

Balluff Inc.
8125 Holton Drive
Florence, KY 41042
Phone: (859) 727-2200
Toll-free: 1-800-543-8390
Fax: (859) 727-4823
Web: www.balluff.com
E-Mail: balluff@balluff.com

Canada

Balluff Canada, Inc.
2840 Argentia Road, Unit #2
Mississauga, Ontario L5N 8G4
Phone: (905) 816-1494
Toll-free: 1-800-927-9654
Fax: (905) 816-1411
Web: www.balluff.ca
E-mail: balluff.canada@balluff.ca


Mexico

Balluff de Mexico S.A. de C.V
Prol. Av. Luis M. Vega #109
Col. Ampliacion Cimataro
Queretaro, QRO 76030
Phone: (+52 442) 212-4882,
224-3583, 224-3171
Fax: (+52 442) 214-0536
E-Mail: balluff.mexico@balluff.com

For more information on Capacitive sensors, visit www.balluff.com/capacitive

Resources available:

- Datasheets
- Drawings
- Literature
- Applications
- Videos

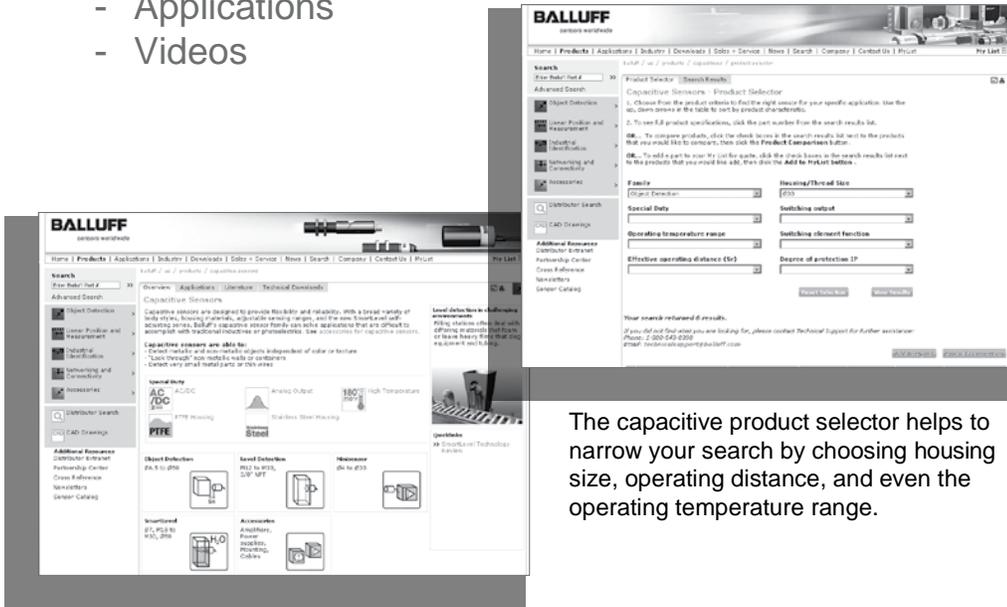

The capacitive product selector helps to narrow your search by choosing housing size, operating distance, and even the operating temperature range.

Visit the capacitive overview page to learn more about Balluff's general and special duty capacitive sensors. You can also access other resources such as applications, literature, technical downloads, and more.



Visit the SMARTLevel page to watch a demonstration video and download articles, press releases and more about the SMARTLevel line at www.balluff.com/smartlevel.



Visit the Capacitive Applications area to find various object detection and level sensing applications.

Capacitive Sensors

New ordering codes and part numbers

The following pages give a cross reference to old SK-, SK1-, SV- and SVG- part number to our new short order and part description. The part number changeover affects only the short order codes and part numbers, all sensor specification remain unchanged.

Old part number	Old article number	New part number	New ordering code	Page number
BCS 010-POB-1-L-PU-02	155034	BCS G10T4H-POM40C-EP02	BCS002U	18
BCS 010-PSB-1-L-PU-02	554550	BCS G10T4H-PSM40C-EP02	BCS002T	18
BCS 012-PS-1-L-S4	149696	BCS M12T4D2-PSM80G-S04G	BCS0062	32
BCS 012-PSB-1-L-S4	149695	BCS M12T4D2-PSM40C-S04G	BCS0037	18
BCS 20MG10-XPA1Y-8B-03	523190	unchanged	BCS0001	29
BCS G34KN2-NOC20G-AV02	153036	unchanged	BCS0002	36
BCS G34KN2-NSC24G-AV02	125722	unchanged	BCS0003	36
BCS G34KN2-POC20G-AV02	153035	unchanged	BCS0004	36
BCS G34KN2-PSC24G-AV02	125723	unchanged	BCS0005	36
BCS G34KN2-UOT20G-AV02	153140	unchanged	BCS0006	53
BCS G34KN2-UST20G-AV02	153141	unchanged	BCS0007	53
BCS M08EG1-PSC15C-S49G	155032	BCS M08T4E2-PSM15C-S49G	BCS002A	16
BCS M08EG-PSC30G-S49G	155033	BCS M08T4E2-PSM30G-S49G	BCS002M	16
BCS M12ED-XXS40B-BP02-GZ01	124538	BCS M12T4D-XXS40C-EP02-GZ01-002	BCS0018	18
BCS M12EG2-XXS10B-BT01-GZ01-501	125801	unchanged	BCS00CR	32
BCS M18EM-POC15G-S04G	155037	BCS M18T4G2-POC15G-S04G	BCS006C	34
BCS M18EM1-POC80C-S04G	155035	BCS M18B4G2-POC80C-S04G	BCS0049	18
BCS M18EM1-PSC80C-S04G	149694	BCS M18B4G2-PSC80C-S04G	BCS0047	18
BCS M18EM-PSC15G-S04G	155036	BCS M18T4G2-PSC15G-S04G	BCS006A	34
BCS M18KM3-NOC80G-BV02	153031	unchanged	BCS0008	34
BCS M18KM3-NSC80G-BV02	145178	unchanged	BCS0009	34
BCS M18KM3-POC80G-BV02	153032	unchanged	BCS000A	34
BCS M18KM3-POC80G-S04G-001	145184	unchanged	BCS000C	34
BCS M18KM3-PSC80G-BV02	145175	unchanged	BCS000E	34
BCS M18KM3-PSC80G-S04G	145181	unchanged	BCS000H	34
BCS M18KM3-UOT80G-BV02	153134	unchanged	BCS000J	53
BCS M18KM3-UST80G-BV02	153148	unchanged	BCS000K	53
BCS M30EG2-PSC30G-S04K	152269	unchanged	BCS00HF	N/A
BCS M30EM2-PSC20C-S04K	152270	unchanged	BCS00HH	N/A
BCS M30KM7-PPH15G-S04U	139472	unchanged	BCS000L	36
BCS M30KN2-NOC15G-AV02	153034	unchanged	BCS000M	36
BCS M30KN2-NSC18G-AV02	125724	unchanged	BCS000N	36
BCS M30KN2-POC15G-AV02	153033	unchanged	BCS000P	36
BCS M30KN2-PSC18G-AV02	125728	unchanged	BCS000R	36
BCS M30KN2-UOT15G-AV02	153143	unchanged	BCS000U	53
BCS M30KN2-UST15G-AV02	153147	unchanged	BCS000W	53
BCS R08KE-POC80C-EP00,2-GS49	155621	BCS R08RR01-POM80C-EP00,2-GS49	BCS0056	26
BCS R08KE-POCFAC-EP00,2-GS49	155619	BCS R08RR01-POMFAC-EP00,2-GS49	BCS008N	48
BCS R08KE-PSC80C-EP00,2-GS49	155620	BCS R08RR01-PSM80C-EP00,2-GS49	BCS0055	26
BCS R08KE-PSCFAC-EP00,2-GS49	155618	BCS R08RR01-PSMFAC-EP00,2-GS49	BCS008M	48

Capacitive Sensors

New ordering codes and part numbers

Old part number	Old article number	New part number	New ordering code	Page number
BES 516-620-PS-02	124539	BAE SA-CS-001-PS	BAE009E	57
MA-M18/M30/10-VA	90092	BAM AD-XA-001-M18/M30-4	BAM018E	86
MA-M18/M32/10-VA	90093	BAM AD-XA-001-M18/M32x1,5-4	BAM018F	86
MA-M18/R1/10-VA	90109	BAM AD-XA-001-M18/R1"-4	BAM018H	86
MSA-MLM12/G1/2-VA	13016	BAM AD-XA-002-M12/G1/2"-4	BAM018K	86
MSA-MLM12/M18X1-VA	13014	BAM AD-XA-002-M12/M18-4	BAM018J	86
SK-1-M5-B-VA/PTFE	3002	BCS M05T4C-XXS10C-EP02-GZ01-002	BCS0011	14
SK-1-4-B-VA/PTFE	3001	BCS G04T4D-XXS10C-EP02-GZ01-002	BCS0010	14
SK-1.5-6.5-B-VA/PTFE	3003	BCS G06T4B-XXS15C-EP02-GZ01-002	BCS0012	14
SK-1.5-M8-B-VA/PTFE	3005	BCS M08T4C-XXS15C-EP02-GZ01-002	BCS0014	16
SK-3-18/2.5-B-VA/PTFE	3011	BCS D18T403-XXS30C-EP02-GZ01-002	BCS001A	22
SK-3-6.5-NB-VA/PTFE	3004	BCS G06T4B-XXS30G-EP02-GZ01-002	BCS0013	14
BCS 010-POB-1-L-PU-02	155034	BCS G10T4H-POM40C-EP02	BCS002U	18
BCS 010-PSB-1-L-PU-02	554550	BCS G10T4H-PSM40C-EP02	BCS002T	18
BCS 012-PS-1-L-S4	149696	BCS M12T4D2-PSM80G-S04G	BCS0062	32
BCS 012-PSB-1-L-S4	149695	BCS M12T4D2-PSM40C-S04G	BCS0037	18
BCS 20MG10-XPA1Y-8B-03	523190	unchanged	BCS0001	29
BCS G34KN2-NOC20G-AV02	153036	unchanged	BCS0002	36
BCS G34KN2-NSC24G-AV02	125722	unchanged	BCS0003	36
BCS G34KN2-POC20G-AV02	153035	unchanged	BCS0004	36
BCS G34KN2-PSC24G-AV02	125723	unchanged	BCS0005	36
BCS G34KN2-UOT20G-AV02	153140	unchanged	BCS0006	53
BCS G34KN2-UST20G-AV02	153141	unchanged	BCS0007	53
BCS M08EG1-PSC15C-S49G	155032	BCS M08T4E2-PSM15C-S49G	BCS002A	16
BCS M08EG-PSC30G-S49G	155033	BCS M08T4E2-PSM30G-S49G	BCS002M	16
BCS M12ED-XXS40B-BP02-GZ01	124538	BCS M12T4D-XXS40C-EP02-GZ01-002	BCS0018	18
BCS M12EG2-XXS10B-BT01-GZ01-501	125801	unchanged	BCS00CR	32
BCS M18EM-POC15G-S04G	155037	BCS M18T4G2-POC15G-S04G	BCS006C	34
BCS M18EM1-POC80C-S04G	155035	BCS M18B4G2-POC80C-S04G	BCS0049	18
BCS M18EM1-PSC80C-S04G	149694	BCS M18B4G2-PSC80C-S04G	BCS0047	18
BCS M18EM-PSC15G-S04G	155036	BCS M18T4G2-PSC15G-S04G	BCS006A	34
BCS M18KM3-NOC80G-BV02	153031	unchanged	BCS0008	34
BCS M18KM3-NSC80G-BV02	145178	unchanged	BCS0009	34
BCS M18KM3-POC80G-BV02	153032	unchanged	BCS000A	34
BCS M18KM3-POC80G-S04G-001	145184	unchanged	BCS000C	34
BCS M18KM3-PSC80G-BV02	145175	unchanged	BCS000E	34
BCS M18KM3-PSC80G-S04G	145181	unchanged	BCS000H	34
BCS M18KM3-UOT80G-BV02	153134	unchanged	BCS000J	53
BCS M18KM3-UST80G-BV02	153148	unchanged	BCS000K	53
BCS M30EG2-PSC30G-S04K	152269	unchanged	BCS00HF	N/A
BCS M30EM2-PSC20C-S04K	152270	unchanged	BCS00HH	N/A
BCS M30KM7-PPH15G-S04U	139472	unchanged	BCS000L	36
BCS M30KN2-NOC15G-AV02	153034	unchanged	BCS000M	36
BCS M30KN2-NSC18G-AV02	125724	unchanged	BCS000N	36

Capacitive Sensors

New ordering codes and part numbers

New

New

Old part number	Old article number	New part number	New ordering code	Page number
BCS M30KN2-POC15G-AV02	153033	unchanged	BCS000P	36
BCS M30KN2-PSC18G-AV02	125728	unchanged	BCS000R	36
BCS M30KN2-UOT15G-AV02	153143	unchanged	BCS000U	53
BCS M30KN2-UST15G-AV02	153147	unchanged	BCS000W	53
BCS R08KE-POC80C-EP00,2-GS49	155621	BCS R08RR01-POM80C-EP00,2-GS49	BCS0056	26
BCS R08KE-POCFAC-EP00,2-GS49	155619	BCS R08RR01-POMFAC-EP00,2-GS49	BCS008N	48
BCS R08KE-PSC80C-EP00,2-GS49	155620	BCS R08RR01-PSM80C-EP00,2-GS49	BCS0055	26
BCS R08KE-PSCFAC-EP00,2-GS49	155618	BCS R08RR01-PSMFAC-EP00,2-GS49	BCS008M	48
BES 516-620-PS-02	124539	BAE SA-CS-001-PS	BAE009E	57
MA-M18/M30/10-VA	90092	BAM AD-XA-001-M18/M30-4	BAM018E	86
MA-M18/M32/10-VA	90093	BAM AD-XA-001-M18/M32x1,5-4	BAM018F	86
MA-M18/R1/10-VA	90109	BAM AD-XA-001-M18/R1"-4	BAM018H	86
MSA-MLM12/G1/2-VA	13016	BAM AD-XA-002-M12/G1/2"-4	BAM018K	86
MSA-MLM12/M18X1-VA	13014	BAM AD-XA-002-M12/M18-4	BAM018J	86
SK-1-M5-B-VA/PTFE	3002	BCS M05T4C-XXS10C-EP02-GZ01-002	BCS0011	14
SK-1-4-B-VA/PTFE	3001	BCS G04T4D-XXS10C-EP02-GZ01-002	BCS0010	14
SK-1.5-6.5-B-VA/PTFE	3003	BCS G06T4B-XXS15C-EP02-GZ01-002	BCS0012	14
SK-1.5-M8-B-VA/PTFE	3005	BCS M08T4C-XXS15C-EP02-GZ01-002	BCS0014	16
SK-3-18/2.5-B-VA/PTFE	3011	BCS D18T403-XXS30C-EP02-GZ01-002	BCS001A	22
SK-3-6.5-NB-VA/PTFE	3004	BCS G06T4B-XXS30G-EP02-GZ01-002	BCS0013	14
SK-3-M8-NB-VA/PTFE	3006	BCS M08T4C1-XXS30G-EP02-GZ01-002	BCS0015	16
SK-4-10-B-VA/PTFE	3007	BCS G10T4B-XXS40C-EP02-GZ01-002	BCS0016	16
SK-4-M12-B-VA/PTFE	3009	BCS M12T4D-XXS40C-EP02-GZ01-002	BCS0018	18
SK-5-18/10-B-VA/PTFE	3013	BCS D18T407-XXS50C-EP02-GZ01-002	BCS001E	22
SK-5-18/4-B-VA/PTFE	3012	BCS D18T404-XXS50C-EP02-GZ01-002	BCS001C	22
SK-8-10-NB-VA/PTFE	3008	BCS G10T4C-XXS80G-EP02-GZ01-002	BCS0017	16
SK-8-M12-NB-VA/PTFE	3010	BCS M12T4D1-XXS80G-EP02-GZ01-002	BCS0019	18
SK-10-22/10-B-VA/PTFE	3015	BCS D22T408-XXS10C-EP02-GZ01-002	BCS001H	22
SK-10-22/4-B-VA/PTFE	3014	BCS D22T405-XXS10C-EP02-GZ01-002	BCS001F	22
SK-15-30/10-B-VA/PTFE	3017	BCS D30T409-XXS15C-EP02-GZ01-002	BCS001K	24
SK-15-30/4-B-VA/PTFE	3016	BCS D30T406-XXS15C-EP02-GZ01-002	BCS001J	24
SK-HT180-FS-J3/8NPTF-VA/PTFE	9010	BCS S10T403-XXSFNC-SZ02-T07	BCS00A5	51
SK-HT180-FS-M18-VA/PTFE	9008	BCS S10T401-XXSFNC-SZ02-T07	BCS00A3	51
SK-HT180-FS-R3/8-VA/PTFE	9009	BCS S10T402-XXSFNC-SZ02-T07	BCS00A4	51
SK-HT250-10-M18-NB-VA/PTFE	9001	BCS M18T4H1-XXS10H-SZ02-T08	BCS00A1	51
SK-HT250-20-M30-NB-VA/PTFE	9002	BCS M30T4G1-XXS20H-SZ02-T08	BCS00A2	51
SK1-1.5-6.5-NBO-VA/PTFE	6004	BCS G06T4E1-NOM15C-EP02	BCS001P	14
SK1-1.5-6.5-NBO-VA/PTFE-Y1	6008	BCS G06T4D2-NOM15C-S49G	BCS001W	14
SK1-1.5-6.5-NBS-VA/PTFE	6003	BCS G06T4E1-NSM15C-EP02	BCS001N	14
SK1-1.5-6.5-NBS-VA/PTFE-Y1	6007	BCS G06T4D2-NSM15C-S49G	BCS001U	14
SK1-1.5-6.5-PBO-VA/PTFE	6002	BCS G06T4E1-POM15C-EP02	BCS001M	14
SK1-1.5-6.5-PBO-VA/PTFE-Y1	6006	BCS G06T4D2-POM15C-S49G	BCS001T	14
SK1-1.5-6.5-PBS-VA/PTFE	6001	BCS G06T4E1-PSM15C-EP02	BCS001L	14
SK1-1.5-6.5-PBS-VA/PTFE-Y1	6005	BCS G06T4D2-PSM15C-S49G	BCS001R	14

Capacitive Sensors

New ordering codes and part numbers

Old part number	Old article number	New		Page number
		New part number	New ordering code	
SK1-1.5-M8-NBO-VA/PTFE	6020	BCS M08T4E1-NOM15C-EP02	BCS0029	16
SK1-1.5-M8-NBO-VA/PTFE-Y1	6024	BCS M08T4E2-NOM15C-S49G	BCS002F	16
SK1-1.5-M8-NBS-VA/PTFE	6019	BCS M08T4E1-NSM15C-EP02	BCS0028	16
SK1-1.5-M8-NBS-VA/PTFE-Y1	6023	BCS M08T4E2-NSM15C-S49G	BCS002E	16
SK1-1.5-M8-PBO-VA/PTFE	6018	BCS M08T4E1-POM15C-EP02	BCS0027	16
SK1-1.5-M8-PBO-VA/PTFE-Y1	6022	BCS M08T4E2-POM15C-S49G	BCS002C	16
SK1-1.5-M8-PBS-VA/PTFE	6017	BCS M08T4E1-PSM15C-EP02	BCS0026	16
SK1-1.5-M8-PBS-VA/PTFE-Y1	6021	BCS M08T4E2-PSM15C-S49G	BCS002A	16
SK1-3-6.5-NNBO-VA/PTFE	6012	BCS G06T4E1-NOM30G-EP02	BCS0021	14
SK1-3-6.5-NNBO-VA/PTFE-Y1	6016	BCS G06T4D2-NOM30G-S49G	BCS0025	14
SK1-3-6.5-NNBS-VA/PTFE	6011	BCS G06T4E1-NSM30G-EP02	BCS0020	14
SK1-3-6.5-NNBS-VA/PTFE-Y1	6015	BCS G06T4D2-NSM30G-S49G	BCS0024	14
SK1-3-6.5-PNBO-VA/PTFE	6010	BCS G06T4E1-POM30G-EP02	BCS001Z	14
SK1-3-6.5-PNBO-VA/PTFE-Y1	6014	BCS G06T4D2-POM30G-S49G	BCS0023	14
SK1-3-6.5-PNBS-VA/PTFE	6009	BCS G06T4E1-PSM30G-EP02	BCS001Y	14
SK1-3-6.5-PNBS-VA/PTFE-Y1	6013	BCS G06T4D2-PSM30G-S49G	BCS0022	14
SK1-3-M8-NNBO-VA/PTFE	6028	BCS M08T4E1-NOM30G-EP02	BCS002L	16
SK1-3-M8-NNBO-VA/PTFE-Y1	6032	BCS M08T4E2-NOM30G-S49G	BCS002R	16
SK1-3-M8-NNBS-VA/PTFE	6027	BCS M08T4E1-NSM30G-EP02	BCS002K	16
SK1-3-M8-NNBS-VA/PTFE-Y1	6031	BCS M08T4E2-NSM30G-S49G	BCS002P	16
SK1-3-M8-PNBO-VA/PTFE	6026	BCS M08T4E1-POM30G-EP02	BCS002J	16
SK1-3-M8-PNBO-VA/PTFE-Y1	6030	BCS M08T4E2-POM30G-S49G	BCS002N	16
SK1-3-M8-PNBS-VA/PTFE	6025	BCS M08T4E1-PSM30G-EP02	BCS002H	16
SK1-3-M8-PNBS-VA/PTFE-Y1	6029	BCS M08T4E2-PSM30G-S49G	BCS002M	16
SK1-4-10-NBO-VA/PTFE	6036	BCS G10T4H-NOM40C-EP02	BCS002Y	18
SK1-4-10-NBS-VA/PTFE	6035	BCS G10T4H-NSM40C-EP02	BCS002W	18
SK1-4-10-PBO-VA/PTFE	6034	BCS G10T4H-POM40C-EP02	BCS002U	18
SK1-4-10-PBS-VA/PTFE	6033	BCS G10T4H-PSM40C-EP02	BCS002T	18
SK1-4-M12-NBO-PVC	6094	BCS M12VVG1-NOM40C-EP02	BCS003R	18
SK1-4-M12-NBO-PVC-Y2	6098	BCS M12VVD2-NOM40C-S04G	BCS003Y	18
SK1-4-M12-NBO-VA/PTFE	6040	BCS M12T4G1-NOM40C-EP02	BCS0032	18
SK1-4-M12-NBO-VA/PTFE-Y2	6068	BCS M12T4D2-NOM40C-S04G	BCS00AC	18
SK1-4-M12-NBS-PVC	6093	BCS M12VVG1-NSM40C-EP02	BCS003P	18
SK1-4-M12-NBS-PVC-Y2	6097	BCS M12VVD2-NSM40C-S04G	BCS003W	18
SK1-4-M12-NBS-VA/PTFE	6039	BCS M12T4G1-NSM40C-EP02	BCS0031	18
SK1-4-M12-NBS-VA/PTFE-Y2	6067	BCS M12T4D2-NSM40C-S04G	BCS0039	18
SK1-4-M12-PBO-PVC	6092	BCS M12VVG1-POM40C-EP02	BCS003N	18
SK1-4-M12-PBO-PVC-Y2	6096	BCS M12VVD2-POM40C-S04G	BCS003U	18
SK1-4-M12-PBO-VA/PTFE	6038	BCS M12T4G1-POM40C-EP02	BCS0030	18
SK1-4-M12-PBO-VA/PTFE-Y2	6066	BCS M12T4D2-POM40C-S04G	BCS0038	18
SK1-4-M12-PBS-PVC	6091	BCS M12VVG1-PSM40C-EP02	BCS003M	18
SK1-4-M12-PBS-PVC-Y2	6095	BCS M12VVD2-PSM40C-S04G	BCS003T	18
SK1-4-M12-PBS-VA/PTFE	6037	BCS M12T4G1-PSM40C-EP02	BCS002Z	18
SK1-4-M12-PBS-VA/PTFE-Y2	6065	BCS M12T4D2-PSM40C-S04G	BCS0037	18

Capacitive Sensors

New ordering codes and part numbers

Old part number	Old article number	New part number	New ordering code	Page number
SK1-6F-22/4-NBS-VA/PTFE	6087	BCS D22T403-NSM60C-EP02	BCS003J	24
SK1-6F-22/4-PBS-VA/PTFE	6085	BCS D22T403-PSM60C-EP02	BCS003H	24
SK1-8-34/16/8-NBO-PP	6136	BCS R08RR01-NOM80C-EP02	BCS0054	26
SK1-8-34/16/8-NBO-PP-M2/Y1	6140	BCS R08RR01-NOM80C-EP00,2-GS49	BCS0058	26
SK1-8-34/16/8-NBS-PP	6135	BCS R08RR01-NSM80C-EP02	BCS0053	26
SK1-8-34/16/8-NBS-PP-M2/Y1	6139	BCS R08RR01-NSM80C-EP00,2-GS49	BCS0057	26
SK1-8-34/16/8-PBO-PP	6134	BCS R08RR01-POM80C-EP02	BCS0052	26
SK1-8-34/16/8-PBO-PP-M2/Y1	6138	BCS R08RR01-POM80C-EP00,2-GS49	BCS0056	26
SK1-8-34/16/8-PBS-PP	6133	BCS R08RR01-PSM80C-EP02	BCS0051	26
SK1-8-34/16/8-PBS-PP-M2/Y1	6137	BCS R08RR01-PSM80C-EP00,2-GS49	BCS0055	26
SK1-8-M12-NNBO-CPTFE	7080	BCS M12TTG1-NOM80G-ET02	BCS0072	32
SK1-8-M12-NNBO-PVC	7004	BCS M12VVG1-NOM80G-EP02	BCS005E	32
SK1-8-M12-NNBO-PVC-Y2	7040	BCS M12VVD2-NOM80G-S04G	BCS0061	32
SK1-8-M12-NNBO-VA/PTFE	7008	BCS M12T4G1-NOM80G-EP02	BCS005K	32
SK1-8-M12-NNBO-VA/PTFE-Y2	7044	BCS M12T4D2-NOM80G-S04G	BCS0065	32
SK1-8-M12-NNBS-CPTFE	7079	BCS M12TTG1-NSM80G-ET02	BCS0071	32
SK1-8-M12-NNBS-PVC	7003	BCS M12VVG1-NSM80G-EP02	BCS005C	32
SK1-8-M12-NNBS-PVC-Y2	7039	BCS M12VVD2-NSM80G-S04G	BCS0060	32
SK1-8-M12-NNBS-VA/PTFE	7007	BCS M12T4G1-NSM80G-EP02	BCS005J	32
SK1-8-M12-NNBS-VA/PTFE-Y2	7043	BCS M12T4D2-NSM80G-S04G	BCS0064	32
SK1-8-M12-PNBO-CPTFE	7078	BCS M12TTG1-POM80G-ET02	BCS0070	32
SK1-8-M12-PNBO-PVC	7002	BCS M12VVG1-POM80G-EP02	BCS005A	32
SK1-8-M12-PNBO-PVC-Y2	7038	BCS M12VVD2-POM80G-S04G	BCS005Z	32
SK1-8-M12-PNBO-VA/PTFE	7006	BCS M12T4G1-POM80G-EP02	BCS005H	32
SK1-8-M12-PNBO-VA/PTFE-Y2	7042	BCS M12T4D2-POM80G-S04G	BCS0063	32
SK1-8-M12-PNBS-CPTFE	7077	BCS M12TTG1-PSM80G-ET02	BCS006Z	32
SK1-8-M12-PNBS-PVC	7001	BCS M12VVG1-PSM80G-EP02	BCS0059	32
SK1-8-M12-PNBS-PVC-Y2	7037	BCS M12VVD2-PSM80G-S04G	BCS005Y	32
SK1-8-M12-PNBS-VA/PTFE	7005	BCS M12T4G1-PSM80G-EP02	BCS005F	32
SK1-8-M12-PNBS-VA/PTFE-Y2	7041	BCS M12T4D2-PSM80G-S04G	BCS0062	32
SK1-8-M18-NBO-PVC	6102	BCS M18VVM1-NOM80C-EV02	BCS0045	20
SK1-8-M18-NBO-PVC-Y2	6106	BCS M18VVG2-NOC80C-S04G	BCS004E	20
SK1-8-M18-NBO-VA/PBT	6048	BCS M18B4M-NOC80C-EV02	BCS004AE	20
SK1-8-M18-NBO-VA/PBT-Y2	6072	BCS M18B4G2-NOC80C-S04G	BCS004F	18
SK1-8-M18-NBS-PVC	6101	BCS M18VVM1-NSM80C-EV02	BCS0043	20
SK1-8-M18-NBS-PVC-Y2	6105	BCS M18VVG2-NSC80C-S04G	BCS004A	20
SK1-8-M18-NBS-VA/PBT	6047	BCS M18B4M-NSC80C-EV02	BCS0044	20
SK1-8-M18-NBS-VA/PBT-Y2	6071	BCS M18B4G2-NSC80C-S04G	BCS004C	18
SK1-8-M18-PBO-PVC	6100	BCS M18VVM1-POM80C-EV02	BCS0041	20
SK1-8-M18-PBO-PVC-Y2	6104	BCS M18VVG2-POC80C-S04G	BCS0048	20
SK1-8-M18-PBO-VA/PBT	6046	BCS M18B4M-POC80C-EV02	BCS0042	20
SK1-8-M18-PBO-VA/PBT-Y2	6070	BCS M18B4G2-POC80C-S04G	BCS0049	18
SK1-8-M18-PBS-PVC	6099	BCS M18VVM1-PSM80C-EV02	BCS003Z	20
SK1-8-M18-PBS-PVC-Y2	6103	BCS M18VVG2-PSC80C-S04G	BCS0046	20

Capacitive Sensors

New ordering codes and part numbers

Old part number	Old article number	New part number	New ordering code	Page number
SK1-8-M18-PBS-VA/PBT	6045	BCS M18B4M-PSC80C-EV02	BCS0040	20
SK1-8-M18-PBS-VA/PBT-Y2	6069	BCS M18B4G2-PSC80C-S04G	BCS0047	18
SK1-10-22-NBO-VA/PVC	6052	BCS D22V4M1-NOC10C-EV02	BCS0036	20
SK1-10-22-NBS-VA/PVC	6051	BCS D22V4M1-NSC10C-EV02	BCS0035	20
SK1-10-22-PBO-VA/PVC	6050	BCS D22V4M1-POC10C-EV02	BCS0034	20
SK1-4-M12-NBS-VA/PTFE	6039	BCS M12T4G1-NSM40C-EP02	BCS0031	18
SK1-4-M12-NBS-VA/PTFE-Y2	6067	BCS M12T4D2-NSM40C-S04G	BCS0039	18
SK1-4-M12-PBO-PVC	6092	BCS M12VVG1-POM40C-EP02	BCS003N	18
SK1-4-M12-PBO-PVC-Y2	6096	BCS M12VVD2-POM40C-S04G	BCS003U	18
SK1-4-M12-PBO-VA/PTFE	6038	BCS M12T4G1-POM40C-EP02	BCS0030	18
SK1-4-M12-PBO-VA/PTFE-Y2	6066	BCS M12T4D2-POM40C-S04G	BCS0038	18
SK1-4-M12-PBS-PVC	6091	BCS M12VVG1-PSM40C-EP02	BCS003M	18
SK1-4-M12-PBS-PVC-Y2	6095	BCS M12VVD2-PSM40C-S04G	BCS003T	18
SK1-4-M12-PBS-VA/PTFE	6037	BCS M12T4G1-PSM40C-EP02	BCS002Z	18
SK1-4-M12-PBS-VA/PTFE-Y2	6065	BCS M12T4D2-PSM40C-S04G	BCS0037	18
SK1-6F-22/4-NBS-VA/PTFE	6087	BCS D22T403-NSM60C-EP02	BCS003J	24
SK1-6F-22/4-PBS-VA/PTFE	6085	BCS D22T403-PSM60C-EP02	BCS003H	24
SK1-8-34/16/8-NBO-PP	6136	BCS R08RR01-NOM80C-EP02	BCS0054	26
SK1-8-34/16/8-NBO-PP-M2/Y1	6140	BCS R08RR01-NOM80C-EP00,2-GS49	BCS0058	26
SK1-8-34/16/8-NBS-PP	6135	BCS R08RR01-NSM80C-EP02	BCS0053	26
SK1-8-34/16/8-NBS-PP-M2/Y1	6139	BCS R08RR01-NSM80C-EP00,2-GS49	BCS0057	26
SK1-8-34/16/8-PBO-PP	6134	BCS R08RR01-POM80C-EP02	BCS0052	26
SK1-8-34/16/8-PBO-PP-M2/Y1	6138	BCS R08RR01-POM80C-EP00,2-GS49	BCS0056	26
SK1-8-34/16/8-PBS-PP	6133	BCS R08RR01-PSM80C-EP02	BCS0051	26
SK1-8-34/16/8-PBS-PP-M2/Y1	6137	BCS R08RR01-PSM80C-EP00,2-GS49	BCS0055	26
SK1-8-M12-NNBO-CPTFE	7080	BCS M12TTG1-NOM80G-ET02	BCS0072	32
SK1-8-M12-NNBO-PVC	7004	BCS M12VVG1-NOM80G-EP02	BCS005E	32
SK1-8-M12-NNBO-PVC-Y2	7040	BCS M12VVD2-NOM80G-S04G	BCS0061	32
SK1-8-M12-NNBO-VA/PTFE	7008	BCS M12T4G1-NOM80G-EP02	BCS005K	32
SK1-8-M12-NNBO-VA/PTFE-Y2	7044	BCS M12T4D2-NOM80G-S04G	BCS0065	32
SK1-8-M12-NNBS-CPTFE	7079	BCS M12TTG1-NSM80G-ET02	BCS0071	32
SK1-8-M12-NNBS-PVC	7003	BCS M12VVG1-NSM80G-EP02	BCS005C	32
SK1-8-M12-NNBS-PVC-Y2	7039	BCS M12VVD2-NSM80G-S04G	BCS0060	32
SK1-8-M12-NNBS-VA/PTFE	7007	BCS M12T4G1-NSM80G-EP02	BCS005J	32
SK1-8-M12-NNBS-VA/PTFE-Y2	7043	BCS M12T4D2-NSM80G-S04G	BCS0064	32
SK1-8-M12-PNBO-CPTFE	7078	BCS M12TTG1-POM80G-ET02	BCS0070	32
SK1-8-M12-PNBO-PVC	7002	BCS M12VVG1-POM80G-EP02	BCS005A	32
SK1-8-M12-PNBO-PVC-Y2	7038	BCS M12VVD2-POM80G-S04G	BCS005Z	32
SK1-8-M12-PNBO-VA/PTFE	7006	BCS M12T4G1-POM80G-EP02	BCS005H	32
SK1-8-M12-PNBO-VA/PTFE-Y2	7042	BCS M12T4D2-POM80G-S04G	BCS0063	32
SK1-8-M12-PNBS-CPTFE	7077	BCS M12TTG1-PSM80G-ET02	BCS006Z	32
SK1-8-M12-PNBS-PVC	7001	BCS M12VVG1-PSM80G-EP02	BCS0059	32
SK1-8-M12-PNBS-PVC-Y2	7037	BCS M12VVD2-PSM80G-S04G	BCS005Y	32
SK1-8-M12-PNBS-VA/PTFE	7005	BCS M12T4G1-PSM80G-EP02	BCS005F	32

Capacitive Sensors

New ordering codes and part numbers

Old part number	Old article number	New part number	New ordering code	Page number
SK1-8-M12-PNBS-VA/PTFE-Y2	7041	BCS M12T4D2-PSM80G-S04G	BCS0062	32
SK1-8-M18-NBO-PVC	6102	BCS M18VVM1-NOM80C-EV02	BCS0045	20
SK1-8-M18-NBO-PVC-Y2	6106	BCS M18VVG2-NOC80C-S04G	BCS004E	20
SK1-8-M18-NBO-VA/PBT	6048	BCS M18B4M-NOC80C-EV02	BCS00AE	20
SK1-8-M18-NBO-VA/PBT-Y2	6072	BCS M18B4G2-NOC80C-S04G	BCS004F	18
SK1-8-M18-NBS-PVC	6101	BCS M18VVM1-NSM80C-EV02	BCS0043	20
SK1-8-M18-NBS-PVC-Y2	6105	BCS M18VVG2-NSC80C-S04G	BCS004A	20
SK1-8-M18-NBS-VA/PBT	6047	BCS M18B4M-NSC80C-EV02	BCS0044	20
SK1-8-M18-NBS-VA/PBT-Y2	6071	BCS M18B4G2-NSC80C-S04G	BCS004C	18
SK1-8-M18-PBO-PVC	6100	BCS M18VVM1-POM80C-EV02	BCS0041	20
SK1-8-M18-PBO-PVC-Y2	6104	BCS M18VVG2-POC80C-S04G	BCS0048	20
SK1-8-M18-PBO-VA/PBT	6046	BCS M18B4M-POC80C-EV02	BCS0042	20
SK1-8-M18-PBO-VA/PBT-Y2	6070	BCS M18B4G2-POC80C-S04G	BCS0049	18
SK1-8-M18-PBS-PVC	6099	BCS M18VVM1-PSM80C-EV02	BCS003Z	20
SK1-8-M18-PBS-PVC-Y2	6103	BCS M18VVG2-PSC80C-S04G	BCS0046	20
SK1-8-M18-PBS-VA/PBT	6045	BCS M18B4M-PSC80C-EV02	BCS0040	20
SK1-8-M18-PBS-VA/PBT-Y2	6069	BCS M18B4G2-PSC80C-S04G	BCS0047	18
SK1-10-22-NBO-VA/PVC	6052	BCS D22V4M1-NOC10C-EV02	BCS0036	20
SK1-10-22-NBS-VA/PVC	6051	BCS D22V4M1-NSC10C-EV02	BCS0035	20
SK1-10-22-PBO-VA/PVC	6050	BCS D22V4M1-POC10C-EV02	BCS0034	20
SK1-10-22-PBS-VA/PVC	6049	BCS D22V4M1-PSC10C-EV02	BCS0033	20
SK1-15-30/4-NBO-VA/PTFE	6084	BCS D30T401-NOC15C-EP02	BCS003F	24
SK1-15-30/4-NBS-VA/PTFE	6083	BCS D30T401-NSC15C-EP02	BCS003E	24
SK1-15-30/4-PBO-VA/PTFE	6082	BCS D30T401-POC15C-EP02	BCS003C	24
SK1-15-30/4-PBS-VA/PTFE	6081	BCS D30T401-PSC15C-EP02	BCS003A	24
SK1-15-M18-NNBO-CPTFE	7084	BCS M18TTI2-NOC15G-AT02	BCS0076	34
SK1-15-M18-NNBO-PVC	7016	BCS M18VVI1-NOC15G-DV02	BCS005P	34
SK1-15-M18-NNBO-PVC-Y2	7048	BCS M18VVG2-NOC15G-S04G	BCS0069	34
SK1-15-M18-NNBO-VA/PTFE	7020	BCS M18T4I1-NOC15G-DV02	BCS005W	34
SK1-15-M18-NNBO-VA/PTFE-Y2	7052	BCS M18T4G2-NOC15G-S04G	BCS006F	34
SK1-15-M18-NNBS-CPTFE	7083	BCS M18TTI2-NSC15G-AT02	BCS0075	34
SK1-15-M18-NNBS-PVC	7015	BCS M18VVI1-NSC15G-DV02	BCS005N	34
SK1-15-M18-NNBS-PVC-Y2	7047	BCS M18VVG2-NSC15G-S04G	BCS0068	34
SK1-15-M18-NNBS-VA/PTFE	7019	BCS M18T4I1-NSC15G-DV02	BCS005U	34
SK1-15-M18-NNBS-VA/PTFE-Y2	7051	BCS M18T4G2-NSC15G-S04G	BCS006E	34
SK1-15-M18-PNBO-CPTFE	7082	BCS M18TTI2-POC15G-AT02	BCS0074	34
SK1-15-M18-PNBO-PVC	7014	BCS M18VVI1-POC15G-DV02	BCS005M	34
SK1-15-M18-PNBO-PVC-Y2	7046	BCS M18VVG2-POC15G-S04G	BCS0067	34
SK1-15-M18-PNBO-VA/PTFE	7018	BCS M18T4I1-POC15G-DV02	BCS005T	34
SK1-15-M18-PNBO-VA/PTFE-Y2	7050	BCS M18T4G2-POC15G-S04G	BCS006C	34
SK1-15-M18-PNBS-CPTFE	7081	BCS M18TTI2-PSC15G-AT02	BCS0073	34
SK1-15-M18-PNBS-PVC	7013	BCS M18VVI1-PSC15G-DV02	BCS005L	34
SK1-15-M18-PNBS-PVC-Y2	7045	BCS M18VVG2-PSC15G-S04G	BCS0066	34
SK1-15-M18-PNBS-VA/PTFE	7017	BCS M18T4I1-PSC15G-DV02	BCS005R	34

Capacitive Sensors

New ordering codes and part numbers

Old part number	Old article number	New		Page number
		New part number	New ordering code	
SK1-15-M18-PNBS-VA/PTFE-Y2	7049	BCS M18T4G2-PSC15G-S04G	BCS006A	34
SK1-20-30-NBX-VA/PBT	6116	BCS D30B4M3-NPC20C-EP02	BCS004J	20
SK1-20-30-PBX-VA/PBT	6115	BCS D30B4M3-PPC20C-EP02	BCS004H	20
SK1-20-M30-NBX-PBT	6118	BCS M30BBM3-NPC20C-EP02	BCS004L	22
SK1-20-M30-NBX-PBT-Y2	6120	BCS M30BBM2-NPM20C-S04G	BCS004N	20
SK1-20-M30-NBX-VA/PBT	6122	BCS M30B4M3-NPM20C-EP02	BCS004R	20
SK1-20-M30-NBX-VA/PBT-Y2	6124	BCS M30B4M2-NPM20C-S04G	BCS004U	20
SK1-20-M30-PBX-PBT	6117	BCS M30BBM3-PPC20C-EP02	BCS004K	22
SK1-20-M30-PBX-PBT-Y2	6119	BCS M30BBM2-PPM20C-S04G	BCS004M	20
SK1-20-M30-PBX-VA/PBT	6121	BCS M30B4M3-PPM20C-EP02	BCS004P	20
SK1-20-M30-PBX-VA/PBT-Y2	6123	BCS M30B4M2-PPM20C-S04G	BCS004T	20
SK1-25-34-NBX-PVC	6126	BCS G34VVM3-NPM20C-EP02	BCS004Y	22
SK1-25-34-NBX-PVC-Y2	6128	BCS G34VVM2-NPM20C-S04G	BCS0050	22
SK1-25-34-PBX-PVC	6125	BCS G34VVM3-PPM20C-EP02	BCS004W	22
SK1-25-34-PBX-PVC-Y2	6127	BCS G34VVM2-PPM20C-S04G	BCS004Z	22
SK1-25-50/10-XBX-POM	6089	BCS D50O002-YPC25C-EV02	BCS003K	24
SK1-25-50/10-XBX-POM-Y1	6090	BCS D50O003-YPC25C-S49G	BCS003L	24
SK1-30-M30-NNBO-CPTFE	7088	BCS M30TTH2-NOC30G-AT02	BCS007A	36
SK1-30-M30-NNBS-CPTFE	7087	BCS M30TTH2-NSC30G-AT02	BCS0079	36
SK1-30-M30-NNBX-PBT	7090	BCS M30BBM3-NPC30G-EP02	BCS007E	36
SK1-30-M30-NNBX-PBT-Y2	7092	BCS M30BBM2-NPC30G-S04G	BCS007H	36
SK1-30-M30-NNBX-VA/PTFE	7094	BCS M30T4M3-NPC30G-EP02	BCS007K	36
SK1-30-M30-NNBX-VA/PTFE-Y2	7096	BCS M30T4M2-NPC30G-S04G	BCS007M	36
SK1-30-M30-PNBO-CPTFE	7086	BCS M30TTH2-POC30G-AT02	BCS0078	36
SK1-30-M30-PNBS-CPTFE	7085	BCS M30TTH2-PSC30G-AT02	BCS0077	36
SK1-30-M30-PNBX-PBT	7089	BCS M30BBM3-PPC30G-EP02	BCS007C	36
SK1-30-M30-PNBX-PBT-Y2	7091	BCS M30BBM2-PPC30G-S04G	BCS007F	36
SK1-30-M30-PNBX-VA/PTFE	7093	BCS M30T4M3-PPC30G-EP02	BCS007J	36
SK1-30-M30-PNBX-VA/PTFE-Y2	7095	BCS M30T4M2-PPC30G-S04G	BCS007L	36
SK1-A-8-M18-4I20B-VA/PBT	8002	BCW M18B4M1-ICM80C-DV02	BCW0001	N/A
SK1-FS-MLG1/4-XDC-PSU	7306	BCS S40SS02-GPCFNG-EP02	BCS009P	38
SK1-FS-MLG1/4-XDC-PSU-Y1	7309	BCS S41SS02-GPCFNG-S49G	BCS009U	38
SK1-FS-MLM12-XDC-PSU	7305	BCS S40SS01-GPCFNG-EP02	BCS009N	38
SK1-FS-MLM12-XDC-PSU-Y1	7308	BCS S41SS01-GPCFNG-S49G	BCS009T	38
SK1-FS-MLNPT1/4-XDC-PSU	7307	BCS S40SS03-GPCFNG-EP02	BCS009R	38
SK1-FS-MLNPT1/4-XDC-PSU-Y1	7310	BCS S41SS03-GPCFNG-S49G	BCS009W	38
SK1-FS-MLRG1/4-XDC-PSU-Y1	7312	BCS S42SS02-GPCFNG-S49G	BCS009Z	38
SK1-FS-MLRM12-XDC-PSU-Y1	7311	BCS S42SS01-GPCFNG-S49G	BCS009Y	38
SK1-FS-MLRNPT1/4-XDC-PSU-Y1	7313	BCS S42SS03-GPCFNG-S49G	BCS00A0	40
SK1-FSA-34/16/8-NBO-PP	7136	BCS R08RR01-NOMFAC-EP02	BCS008L	48
SK1-FSA-34/16/8-NBO-PP-M2/Y1	7140	BCS R08RR01-NOMFAC-EP00,2-GS49	BCS008R	48
SK1-FSA-34/16/8-NBS-PP	7135	BCS R08RR01-NSMFAC-EP02	BCS008K	48
SK1-FSA-34/16/8-NBS-PP-M2/Y1	7139	BCS R08RR01-NSMFAC-EP00,2-GS49	BCS008P	48
SK1-FSA-34/16/8-PBO-PP	7134	BCS R08RR01-POMFAC-EP02	BCS008J	48

Capacitive Sensors

New ordering codes and part numbers

Old part number	Old article number	New part number	New ordering code	Page number
SK1-FSA-34/16/8-PBO-PP-M2/Y1	7138	BCSR08RR01-POMFAC-EP00,2-GS49	BCS008N	48
SK1-FSA-34/16/8-PBS-PP	7133	BCSR08RR01-PSMFAC-EP02	BCS008H	48
SK1-FSA-34/16/8-PBS-PP-M2/Y1	7137	BCSR08RR01-PSMFAC-EP00,2-GS49	BCS008M	48
SK1-FSA-50/10-NBO-CPTFE	7122	BCS D50TT05-NOCFAC-ET02	BCS0083	48
SK1-FSA-50/10-NBS-CPTFE	7121	BCSD50TT05-NSCFAC-ET02	BCS0082	48
SK1-FSA-50/10-NBX-POM	7124	BCS D500O04-NPCFAC-EV02	BCS0085	48
SK1-FSA-50/10-PBO-CPTFE	7120	BCSD50TT05-POCFAC-ET02	BCS0081	48
SK1-FSA-50/10-PBS-CPTFE	7119	BCS D50TT05-PSCFAC-ET02	BCS0080	48
SK1-FSA-50/10-PBX-POM	7123	BCSD50O004-PPCFAC-EV02	BCS0084	48
SK1-FSA-D7B9/52-NNBO-CPTFE	7160	BCS S20TT01-NOLFAG-ET02	BCS009H	44
SK1-FSA-D7B9/52-NNBS-CPTFE	7159	BCS S20TT01-NSLFAG-ET02	BCS009F	44
SK1-FSA-D7B9/52-PNBO-CPTFE	7158	BCS S20TT01-POLFAG-ET02	BCS009E	44
SK1-FSA-D7B9/52-PNBS-CPTFE	7157	BCSS20TT01-PSLFAG-ET02	BCS009C	44
SK1-FSA-M18-NNBO-CPTFE	7132	BCS M18TTI2-NOCFAG-AT02	BCS008F	43
SK1-FSA-M18-NNBO-PVC	7104	BCS M18VVI1-NOCFAG-DV02	BCS007T	43
SK1-FSA-M18-NNBO-PVC-Y1	7144	BCS M18VVN-NOCFAG-S49G	BCS008Y	43
SK1-FSA-M18-NNBS-CPTFE	7131	BCS M18TTI2-NSCFAG-AT02	BCS008E	43
SK1-FSA-M18-NNBS-PVC	7103	BCS M18VVI1-NSCFAG-DV02	BCS007R	43
SK1-FSA-M18-NNBS-PVC-Y1	7143	BCSM18VVN-NSCFAG-S49G	BCS008W	43
SK1-FSA-M18-PNBO-CPTFE	7130	BCS M18TTI2-POCFAG-AT02	BCS008C	43
SK1-FSA-M18-PNBO-PVC	7102	BCS M18VVI1-POCFAG-DV02	BCS007P	43
SK1-FSA-M18-PNBO-PVC-Y1	7142	BCS M18VVN-POCFAG-S49G	BCS008U	43
SK1-FSA-M18-PNBS-CPTFE	7129	BCS M18TTI2-PSCFAG-AT02	BCS008A	43
SK1-FSA-M18-PNBS-PVC	7101	BCS M18VVI1-PSCFAG-DV02	BCS007N	43
SK1-FSA-M18-PNBS-PVC-Y1	7141	BCSM18VVN-PSCFAG-S49G	BCS008T	43
SK1-FSA-M30-NNBO-CPTFE	7128	BCS M30TTH2-NOCFAG-AT02	BCS0089	44
SK1-FSA-M30-NNBS-CPTFE	7127	BCSM30TTH2-NSCFAG-AT02	BCS0088	44
SK1-FSA-M30-NNBX-PBT	7116	BCS M30BBM3-NPCFAG-EP02	BCS007W	44
SK1-FSA-M30-NNBX-PBT-Y2	7118	BCS M30BBM2-NPCFAG-S04G	BCS007Z	44
SK1-FSA-M30-PNBO-CPTFE	7126	BCS M30TTH2-POCFAG-AT02	BCS0087	44
SK1-FSA-M30-PNBS-CPTFE	7125	BCSM30TTH2-PSCFAG-AT02	BCS0086	44
SK1-FSA-M30-PNBX-PBT	7115	BCS M30BBM3-PPCFAG-EP02	BCS007U	44
SK1-FSA-M30-PNBX-PBT-Y2	7117	BCS M30BBM2-PPCFAG-S04G	BCS007Y	44
SK1-FSA-MLG1/4-XDC-PSU	7146	BCS S40SS02-GPCFAG-EP02	BCS0090	46
SK1-FSA-MLG1/4-XDC-PSU-Y1	7152	BCS S41SS02-GPCFAG-S49G	BCS0096	44
SK1-FSA-MLG1/4-XDCS-PSU	7149	BCS S40SS02-GPCFAG-EP02-D01	BCS0093	46
SK1-FSA-MLM12-XDC-PSU	7145	BCS S40SS01-GPCFAG-EP02	BCS008Z	44
SK1-FSA-MLM12-XDC-PSU-Y1	7151	BCS S41SS01-GPCFAG-S49G	BCS0095	44
SK1-FSA-MLM12-XDCS-PSU	7148	BCSS40SS01-GPCFAG-EP02-D01	BCS0092	46
SK1-FSA-MLNPT1/4-XDC-PSU	7147	BCS S40SS03-GPCFAG-EP02	BCS0091	46
SK1-FSA-MLNPT1/4-XDC-PSU-Y1	7153	BCS S41SS03-GPCFAG-S49G	BCS0097	44
SK1-FSA-MLNPT1/4-XDCS-PSU	7150	BCS S40SS03-GPCFAG-EP02-D01	BCS0094	46
SK1-FSA-MLRG1/4-XDC-PSU-Y1	7155	BCS S42SS02-GPCFAG-S49G	BCS0099	46
SK1-FSA-MLRM12-XDC-PSU-Y1	7154	BCS S42SS01-GPCFAG-S49G	BCS0098	46

Capacitive Sensors

New ordering codes and part numbers

Old part number	Old article number	New part number	New ordering code	Page number
SK1-FSA-MLRNPT1/4-XDC-PSU-Y1	7156	BCS S42SS03-GPCFAG-S49G	BCS009A	46
SK1-HT125-FS-J3/8NPTF-NO-VA/PTFE	90141	BCS S03T401-NOCFNH-KM16-T02	BCS00A9	40
SK1-HT125-FS-J3/8NPTF-NS-VA/PTFE	90140	BCS S03T401-NSCFNH-KM16-T02	BCS00A8	40
SK1-HT125-FS-J3/8NPTF-PO-VA/PTFE	90126	BCS S03T401-POCFNH-KM16-T02	BCS00A7	40
SK1-HT125-FS-J3/8NPTF-PS-VA/PTFE	90144	BCS S03T401-PSCFNH-KM16-T02	BCS00A6	40
SK1-HT125-FS-JM18-NO-VA/PTFE	7064	BCS S01T401-NOCFNG-KM16-T02	BCS006L	40
SK1-HT125-FS-JM18-NS-VA/PTFE	7063	BCS S01T401-NSCFNG-KM16-T02	BCS006K	40
SK1-HT125-FS-JM18-PO-VA/PTFE	7062	BCS S01T401-POCFNG-KM16-T02	BCS006J	40
SK1-HT125-FS-JM18-PS-VA/PTFE	7061	BCS S01T401-PSCFNG-KM16-T02	BCS006H	40
SK1-HT125-FS-JR3/8-NO-VA/PTFE	7068	BCS S02T401-NOCFNG-KM16-T02	BCS006R	40
SK1-HT125-FS-JR3/8-NS-VA/PTFE	7067	BCS S02T401-NSCFNG-KM16-T02	BCS006P	40
SK1-HT125-FS-JR3/8-PO-VA/PTFE	7066	BCS S02T401-POCFNG-KM16-T02	BCS006N	40
SK1-HT125-FS-JR3/8-PS-VA/PTFE	7065	BCS S02T401-PSCFNG-KM16-T02	BCS006M	40
SK1-TM-6-M12/60-NNBO-PVC	7072	BCS M12VVI1-NOM60G-EP02-E	BCS006Y	32
SK1-TM-6-M12/60-NNBS-PVC	7071	BCS M12VVI1-NSM60G-EP02-E	BCS006W	32
SK1-TM-6-M12/60-PNBO-PVC	7070	BCS M12VVI1-POM60G-EP02-E	BCS006U	32
SK1-TM-6-M12/60-PNBS-PVC	7069	BCS M12VVI1-PSM60G-EP02-E	BCS006T	32
SK1-TM-6-M12/63-NNBO-CPTFE	7304	BCS M12TTI1-NOM60G-ET02-E	BCS009M	32
SK1-TM-6-M12/63-NNBS-CPTFE	7303	BCS M12TTI1-NSM60G-ET02-E	BCS009L	32
SK1-TM-6-M12/63-PNBO-CPTFE	7302	BCS M12TTI1-POM60G-ET02-E	BCS009K	32
SK1-TM-6-M12/63-PNBS-CPTFE	7301	BCS M12TTI1-PSM60G-ET02-E	BCS009J	32
SKF-10-90/16/4-B-PC/PU	2003	BCS F01CP01-XXS10C-EP02-GZ01-002	BCS000Y	27
SL-YA-M20	13012	BCC Z001-002	BCC04JU	N/A
SL-YAZA-3m	90069	BCC Z002-030	BCC04JY	N/A
SL-YAZA-8m	90070	BCC Z002-080	BCC04JZ	N/A
SLK-HT	9007	BCC Z003-020	BCC04JW	50
SNG-115AC/24DC-T	12004	BAE SA-XE-011-XR	BAE009Y	64
SNG-115AC-K	4006	BAE SA-CS-007-XR	BAE009L	60
SNG-115AC-K-MinMax	4012	BAE SA-CS-005-XR	BAE009U	62
SNG-115AC-K-T	4008	BAE SA-CS-009-XR	BAE009N	61
SNG-115AC-MINMAX	12006	BAE SA-XE-013-XR	BAE00A0	65
SNG-230AC/24DC-T	12003	BAE SA-XE-010-XR	BAE009W	64
SNG-230AC-K	4005	BAE SA-CS-006-XR	BAE009K	60
SNG-230AC-K-MinMax	4011	BAE SA-CS-004-XR	BAE009T	62
SNG-230AC-K-T	4007	BAE SA-CS-008-XR	BAE009M	61
SNG-230AC-MINMAX	12005	BAE SA-XE-012-XR	BAE009Z	65
SV-2VX-LDG12	4009	BAE SA-CS-002-YP	BAE009P	58
SV-45/30/15-NO	4004	BAE SA-CS-001-NO	BAE009J	57
SV-45/30/15-NS	4003	BAE SA-CS-001-NS	BAE009H	57
SV-45/30/15-PO	4002	BAE SA-CS-001-PO	BAE009F	57
SV-45/30/15-PS	4001	BAE SA-CS-001-PS	BAE009E	57
SV-X2L-LDG12	4010	BAE SA-CS-003-YP	BAE009R	59
Y2-M16	13015	BCC M454-0000-2A-RM004-020	BCC04JT	86

Object Detection



Sensor Product Line

Inductive sensors BES DC 3-/4-wire
Inductive sensors BES DC 2-wire
Inductive sensors BES AC/DC
Inductive sensors BES with special properties
Sensors for pneumatic cylinders BMF
Magnetic field sensors BMF
Capacitive sensors BCS
Pressure sensors BSP



Photoelectric Product Line

Diffuse energetic BOS with fore- and background suppression
Retro-reflective sensors BOS
Through-beam sensors BOS (emitter/receiver)
Fiber optic systems BFB
Through-beam fork sensors BGL
Dynamic optical windows BOWA
Light grids BLG
Contrast sensors BKT
Luminescence sensors BLT
Color sensors BFS
Photoelectric distance sensors BOD



Mechanical Product Line

Mechanical Single and Multiple Position Switches
Mechanical single and multiple position switches to DIN EN 60204-1/VDE 0113
Mechanical single and multiple position switches with positive opening
Mechanical multiple position switches with quick plunger change-out
Inductive single and multiple position switches
Inductive single and multiple position switches with extended switching distance
Mechanical wireless position switches
Mixed assembly multiple position switches

Linear Position and Sensing



Linear Displacement Product Line

Micropulse® transducer BTL Profile Series
Micropulse® transducer BTL AT Series
Micropulse® transducer BTL Rod-Style Series
Micropulse® transducer BTL Compact Rod Series
Micropulse® processors, BUS interfaces
BML magnetic linear encoder system
BDG/BRG incremental and absolute encoders
BIW pulse-Inductive linear displacement sensor
BAW inductive distance sensors
BIL magnetoinductive position sensors
BOD photoelectric distance sensors

Industrial Identification



Industrial Identification

BIS C Industrial RFID systems
BIS L Industrial RFID systems
BIS M Industrial RFID systems
BIS S Industrial RFID systems
BVS Vision Sensor

Industrial Networking and Connectivity



Industrial Networking and Connectivity

BCC connectors and cables
BPI passive splitter boxes
BNI active splitter boxes
IO-Link
Inductive transmission systems - Remote
BIC inductive couplers
BUS systems
Wireless
Electrical Devices

Mechanical Accessories




Mechanical Accessories

Holders and Fastening Systems
BMS mounting system


BALLUFF



Object Detection



Linear Position and Measurement



Industrial Identification



Networking and Connectivity



Accessories



 www.balluff.com



This catalog was printed on 20% post-consumer recycled paper. It represents Balluff's commitment to helping the environment.